


**HF TRANSCEIVER/MULTI BANDER
TS-140S/680S
SERVICE MANUAL**

KENWOOD

©1987-11 PRINTED IN JAPAN
B51-3337-00(O)1573

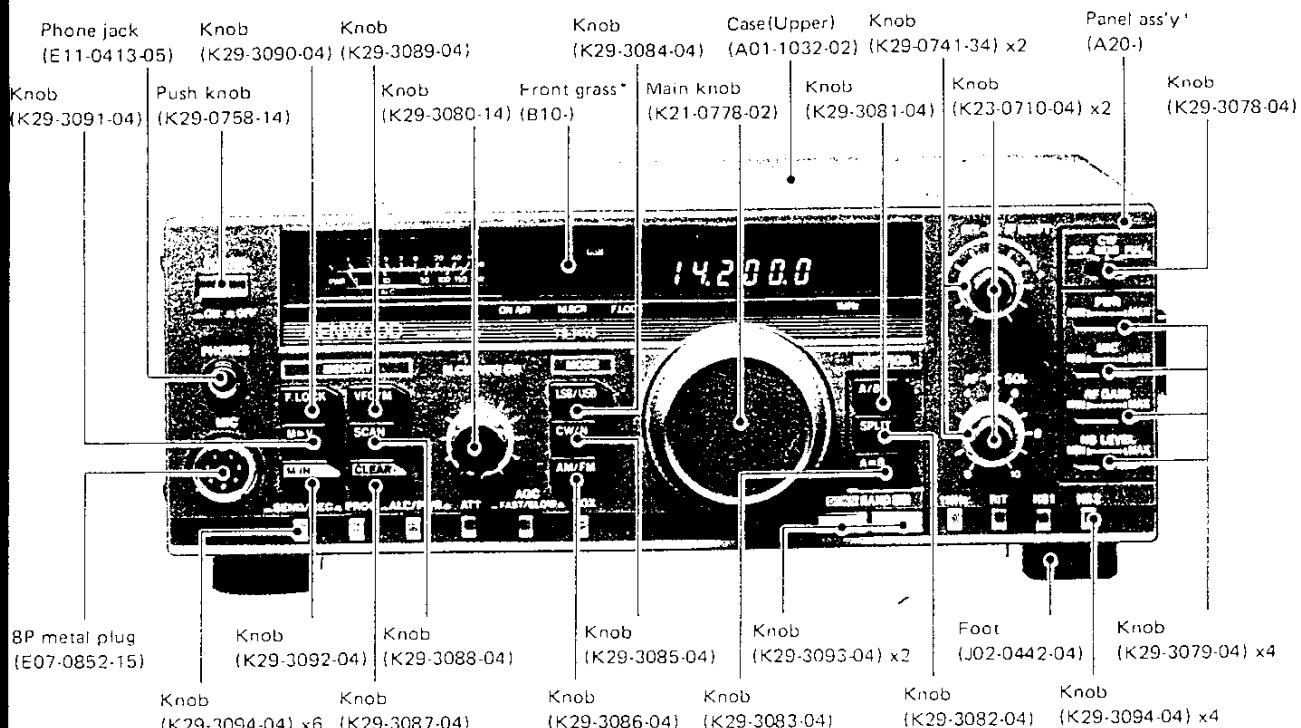

*Refer to parts list on page 42.

CONTENTS

CIRCUIT DESCRIPTION	2	DELAY TIME (X59-3360-00)	101, 110
SEMICONDUCTOR DATA	22	SIGNAL UNIT (X57-3190-00) : TS-680S	102
DESCRIPTION OF COMPONENTS	32	TERMINAL FUNCTIONS	106
PARTS LIST	41	PC BOARD VIEWS/CIRCUIT DIAGRAM	
DISASSEMBLY	75	SIGNAL UNIT (X57-3200-XX) : TS-140S	111
PACKING	79	SWITCH UNIT (X41-3030-XX)	115
LEVEL DIAGRAM	80	FINAL UNIT (X45-3100-XX)	116
ADJUSTMENT	81	FAN (X50-3370-00)	116
BLOCK DIAGRAM (TS-680S)	91	FILTER UNIT (X51-3040-XX)	117
BLOCK DIAGRAM (TS-140S)	93	DISPLAY UNIT (X54-3050-XX)	119
PC BOARD VIEWS/CIRCUIT DIAGRAM		SCHEMATIC DIAGRAM (TS-140S)	121
CONTROL UNIT (X53-3100-XX)	95	SCHEMATIC DIAGRAM (TS-680S)	124
SIDE TONE (X59-1060-00)	101, 110	YK-455C-1 (CW FILTER)	127
VOX (X59-1080-00)	110	TU-8 (TONE UNIT)	128
FM MIC AMP. (X59-3000-02)	101, 110	IF-10C (INTERFACE KIT)	132
TRX (X59-3340-00)	101, 110	SPECIFICATIONS	134
NB2 (X59-3350-00)	101, 110		

FOR SERVICE MANUALS
CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

TS-140S/680S

CIRCUIT DESCRIPTION

Note: This text is concerned primarily with the TS-140. those parts that pertain to the TS-680 will be marked with an asterisk (*).

GENERAL

The TS-140 is a transceiver incorporating a general coverage receiver section utilizing double conversion principles with a first intermediate frequency (IF) of 40.005 MHz and a second IF of 455kHz.

The TS-140 covers all amateur bands from 1.9MHz to 30MHz (*1.9 thru 50MHz). It contains a 10Hz step digital PLL circuit using single crystal frequency management and microprocessor control to provide high accuracy and stability.

The major functions are as follows:

- Receiving section: General coverage from 500kHz to 30MHz (*500kHz to 30MHz, and 50 to 54MHz)
 - Covers all amateur bands from 1.9 to 30MHz (*1.9 to 54MHz)
 - Full CW break-in
 - 28MHz (*50MHz) band Preamplifier control
 - Manual switching of AGC time constnt
 - Built-in variable threshold noise blanker

- Built-in woodpecker noise blanker (NB2)
 - Frequency control function with a second sub-control
 - Frequency configured using a single reference oscillator
 - Range specified memory

FREQUENCY CONFIGURATION

The TS-140 operates using a double conversion system for both transmit and receive (it operates using single conversion in the FM transmit mode).

Figure 1 shows the frequency configuration of the transmit and receive systems. The receiver section will be covered first.

Assume that the input frequency from the antenna FIN, the RX MIX1 local input is fVCO, and the RX MIX2 local input is fHET. When the incoming signal is zero both the following relationships will hold true.

$$\text{for } VCO_2, \frac{f_{VCO_2}}{M} = \frac{f_{STD}}{8 \times 4500} \quad \therefore f_{VCO_2} = \frac{M}{36000} f_{STD} \dots\dots\dots(4)$$

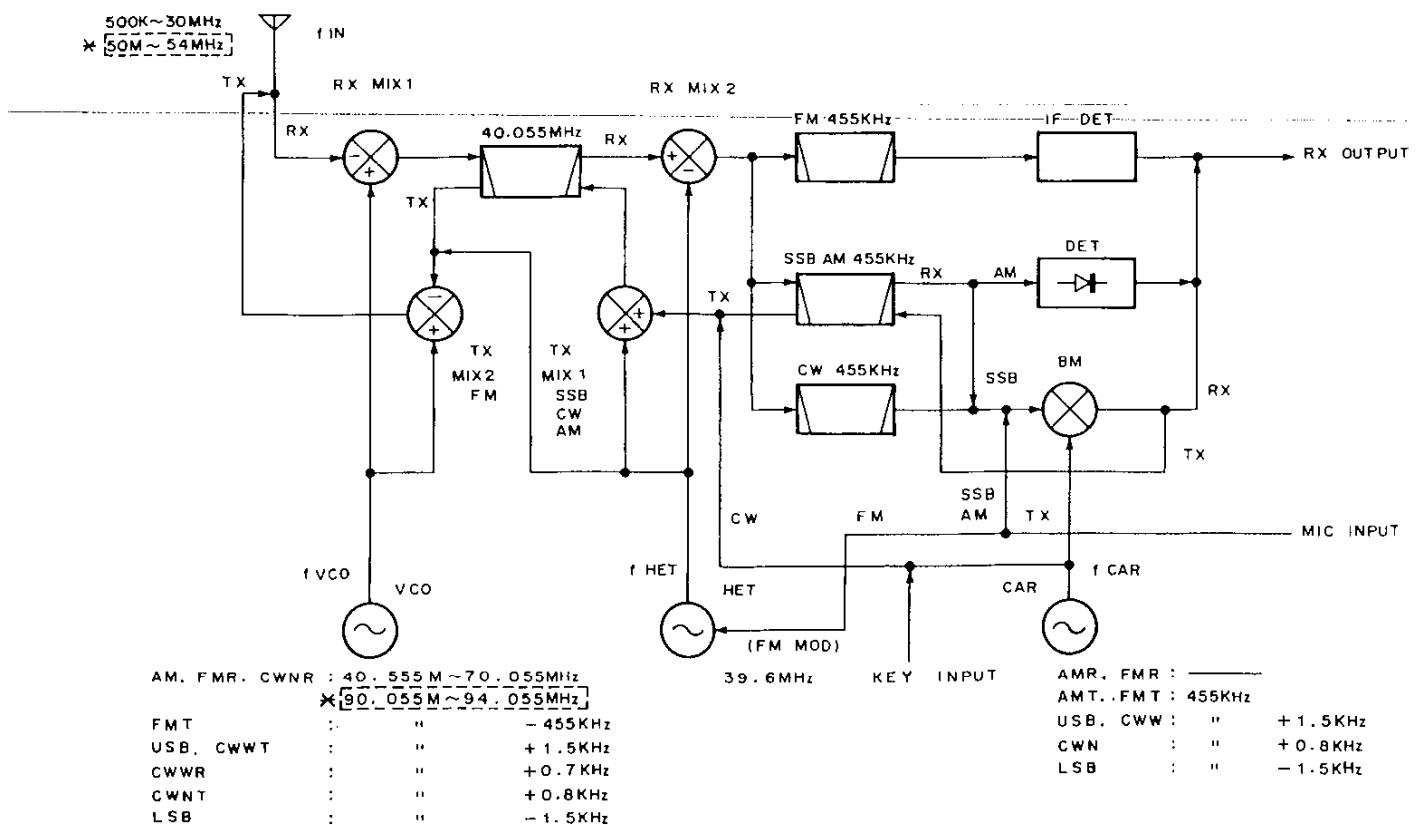


Fig. 1 Signal system frequency configuration

CIRCUIT DESCRIPTION

for VCO1, in the range of 500kHz to 30MHz

$$\frac{f_{VCO_1} - \left(\frac{f_{VCO_2}}{100} + \frac{f_{VCO_3}}{200} + \frac{f_{STD}}{8} + f_{STD} - \frac{f_{STD}}{8} \right)}{N} = \frac{f_{STD}}{8 \times 90}$$

Each local oscillator frequency may be summarized as follows:

$$f_{\text{HET}} = f_{\text{VC04}} \dots \dots \dots \quad (7)$$

Therefore, $f(N)$ in equation (1) is expressed as follows:

VCO1-A: 500kHz to 10.5MHz:

Similarly, VCO1-B and VCO1-C are represented as follows:

VCO1-B: 10.5MHz to 21.5MHz:

VCO1-C: 21.5MHz to 30MHz

*VCO1-D: 50MHz to 54MHz

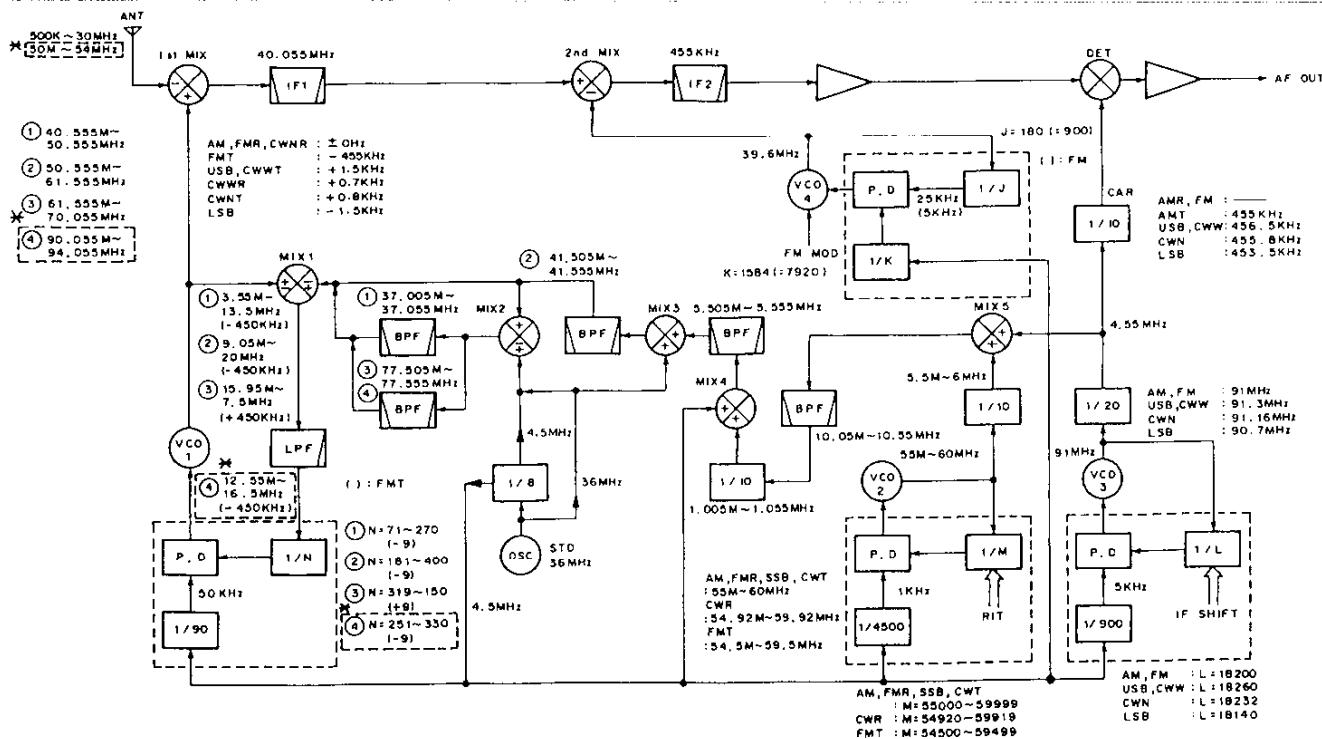


Fig. 2 PLL system frequency configuration

TS-140S/680S

CIRCUIT DESCRIPTION

Since the accuracy of the reference crystal oscillator used in the TS-140 is 10PPM (-10 to +50 deg C), the overall accuracy is obtained by equations (9) to (12) according to characteristics (1) and (2). It is $\pm 450\text{Hz}$ for 14MHz, and $\pm 660\text{Hz}$ maximum for the frequency range of 500kHz to 30MHz. The accuracy of the transceiver is very stable.

*The total accuracy is $\pm 900\text{Hz}$ at maximum for 50 to 54 MHz.

The variable band functions such as the IF shift are controlled by the microprocessor, by controlling the value of L, thus taking advantage of the characteristics (3). The carrier point setting and initial IF shift setting are adjusted by fine tuning of fCAR.

The receive frequency in SSB mode has been discussed already. In the other modes and during transmit operations the other modes and during transmit operations frequency is determined by the reference and division ratios in the same manner as in the SSB mode in.

For CW receive the fVCO frequency is shifted down 800Hz at fVCO2.

For FM transmit the fVCO frequency is shifted down 455Hz at fVCO1 and fVCO2. The audio signal from the microphone is applied to VCO4, and fHET is directly modulated.

fCAR is stabilized by shift data During transmit and receive in the AM mode, and during receive in the FM mode.

The displayed frequency in each mode is listed in table 1.

Mode	Display frequency
USB, LSB	Carrier point frequency
CW	Transmit carrier frequency
AM, FM	IF filter center frequency

Table 1 Display frequencies in modes

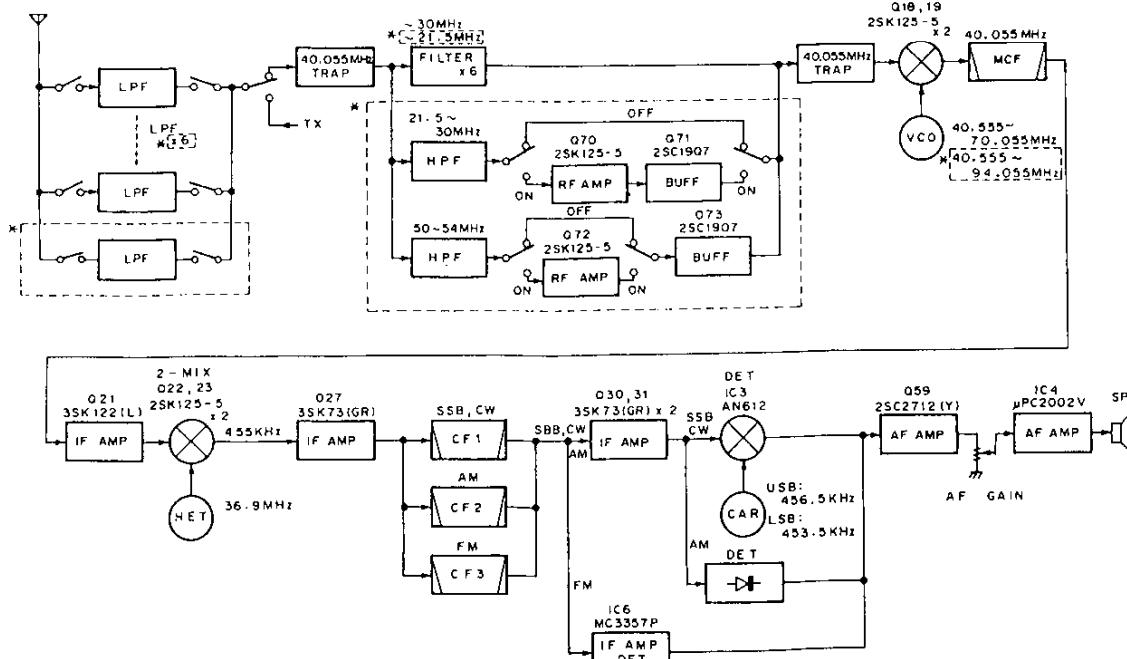


Fig. 3 Receive circuit configuration

Receive Circuit Configuration

The TS-140 receive system operates using double conversion with a first IF of 40.055MHz and a second IF of 455kHz.

The incoming signal from the ANT terminal passes through the filter unit LPF (Low Pass Filter) and transmit/receive switching relay, and is then applied to the RAT terminal of the signal unit. This signal passes through the 20dB attenuator circuit and an IF trap, and enters the 7 part HPF (High Pass Filter) (BPF for 1.6 to 2.5MHz). It combines with the LPF of the filter unit to give the required band rejection for each band.

*When the signal passes through the HPF, the preamplifier can be turned off or on via relays controlled by Q70 (2SK125-5) and Q71 (2SC1907) for 21.5 to 30 MHz or Q72 (2SK125-5) for 50 to 54MHz. When the preamplifier is turned on the signal is amplified approximately 10dB. For 50 to 54MHz the signal passes through buffer amplifier Q73 (2SC1907) for impedance matching regardless of the preamplifier state.

The signal passes through the IF trap again, and is combined with the VCO (Voltage Controlled Oscillator) in the first mixer, Q18 and Q19 (2SK125-5), to generate the first UF of 40.055MHz. The VCO circuit consists of Q9 thru Q11 (2SC2668Y), and generates 40.555 thru 70.055MHz by dividing it into three bands. The frequency is controlled by the DC signal (VCV) from the control unit.

TS-140S/680

CIRCUIT DESCRIPTION

*90.055 to 94.055MHz is generated by the VCO Q12 (2SK192A GR *J). Therefore the circuit contains four VCO's.

The first IF signal of 40.055MHz passes through the two stage MCF (Monolithic Crystal Filter) that is used in both transmit and receive, and is then amplified by the first IF amplifier Q21 (3SK122L), mixed with the 39.6MHz heterodyne signal by the second mixer, Q22 and Q23 (2SK125-5), to generate the second IF of 455kHz. The heterodyne signal is generated by the control unit, then amplified for use by Q78 (2SK73GR). One portion of the 455kHz signal is applied to the noise blanker amplifier, and the other is amplified by Q27 (2SK73GR), passed through the mode specific ceramic filter (CF1 to CF3) or an optional filter to generate the necessary bandwidth, divided into appropriate mode, and fed into each amplifier circuit.

In modes other than FM, the signal is amplified by IF amplifier Q30 and Q31 (3SK73GR), detected by IC3 (AN612) for SSB and CW, and envelope detected by D75 for the AM mode.

In the FM mode the signal is transmitted to IC6 (MC3357P) for limiting, amplification, and detection. This circuit is noise squelch controlled.

The AF signal in each mode after detection is selected by analog switch IC7 (TC4066BP), amplified by Q56 (2SC 2717Y), applied to the AF volume control, and amplified the final level by IC4 (μ PC2002V).

Item	Rating
Nominal center frequency (fo) and declination	40.055MHz ± 0.75kHz or more
Pass bandwidth	fo ± 7.5kHz or more at 3dB
Attenuation bandwidth	fo ± 25kHz or more at 30dB fo ± 150kHz or more at 60dB Spurious is 30dB or more
Guaranteed attenuation	60dB or more at fo ± 150kHz ~ fo ± 1000kHz
Ripple	1.5dB or less
Insertion loss	4dB or less
I/O termination impedance	4.2kΩ

Table 2 MCF (L71-0275-05) (Signal unit XF1)

Item	Rating
Center frequency at 6dB	455kHz ± 0.20kHz
6dB bandwidth (total)	± 1.1 ~ ± 1.3kHz
60dB bandwidth	4.5kHz or less
Guaranteed attenuation (0.1 ~ 1MHz)	60dB or more
Spurious (600 ~ 700kHz)	40dB or more
Ripple at 6dB bandwidth	2dB or less
Insertion loss	2dB or less
I/O termination impedance	2kΩ

Table 3 Ceramic filter (L72-0356-05)
(Signal unit CF1)

Item	Rating
Nominal center frequency (fo)	455kHz
6dB bandwidth	± 2kHz or less
40dB bandwidth	± 7.5kHz or less
Insertion loss	6dB or less
Guaranteed attenuation (Within fo ± 100Hz)	35dB or more
I/O termination impedance	2.0kΩ

Table 4 Ceramic filter (L72-0355-05)
(Signal unit CF2)

Item	Rating
Nominal center frequency (fo)	455kHz ± 1kHz
6dB bandwidth (From 455kHz)	± 6kHz or more
50dB bandwidth (From 455kHz)	± 12.5kHz or less
Ripple (Within fo ± 4kHz)	3dB or less
Insertion loss	6dB or less
Guaranteed attenuation (Within fo ± 100kHz)	35dB or more
I/O termination impedance	2.0kΩ

Table 5 Ceramic filter (L72-0315-05)
(Signal unit CF3)

Noise Blanker Circuit

NB1

NB1 is a noise blanker circuit which is designed for short duration noise interference such as might be encountered in an automobile. The 455kHz IF signal generated from the first IF of 40.055MHz by the second MIX is amplified by the noise amplifiers Q45, Q46, Q47 (2SC2712Y), buffered by Q48, and noise detected by D86. This signal switches Q51 (2SC2712Y), turns on Q28 (2SA1162Y) and Q29 (2SC2712Y), and switches the IF signal line according to variations in the incoming noise.

When NB1 turns on, a DC voltage is applied to the emitter of Q51 from the threshold control, VR4. The effect of the noise blanker is controlled by varying this emitter voltage.

**FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES**

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

TS-140S/680S**CIRCUIT DESCRIPTION****NB2**

NB2 is a noise blunker circuit which blanks noises that have a relatively long duration, such as is generated by the so called "Russian Woodpecker". The noise signal is first amplified by noise amplifiers Q45 thru Q47, and then detected by D87, just as occurs with NB1. The threshold voltage on the emitter of Q50 (2SC2712Y) is also controlled by VR4. Q50's output enters the NB2 module unit X59-3350-00 to synchronize pulse width and period signals with the woodpecker noise.

1/4,4/4 and 2/4,3/4 of IC1 (TC4011BF), are adjusted to a pulse width of 40ms.

Normally, woodpecker type noise has a pulse width of 3 to 4ms and a period of 80 to 100ms, but some woodpecker noise signals might have a period of approximately 50ms, although rare.

Therefore, even woodpecker noise with a large pulse width can be blanked by switching the noise at a 5ms rate. However, if noise with a period of several ms is encountered, such as ignition noise, and is blanked at this same interval, then the signal level will drop or become zero. To prevent this from occurring a one-shot multivibrator, composed of IC1 2/4,3/4, is utilized so that the next pulse does not occur until after a delay of 40ms, from the last output from IC1 1/4,4/4.

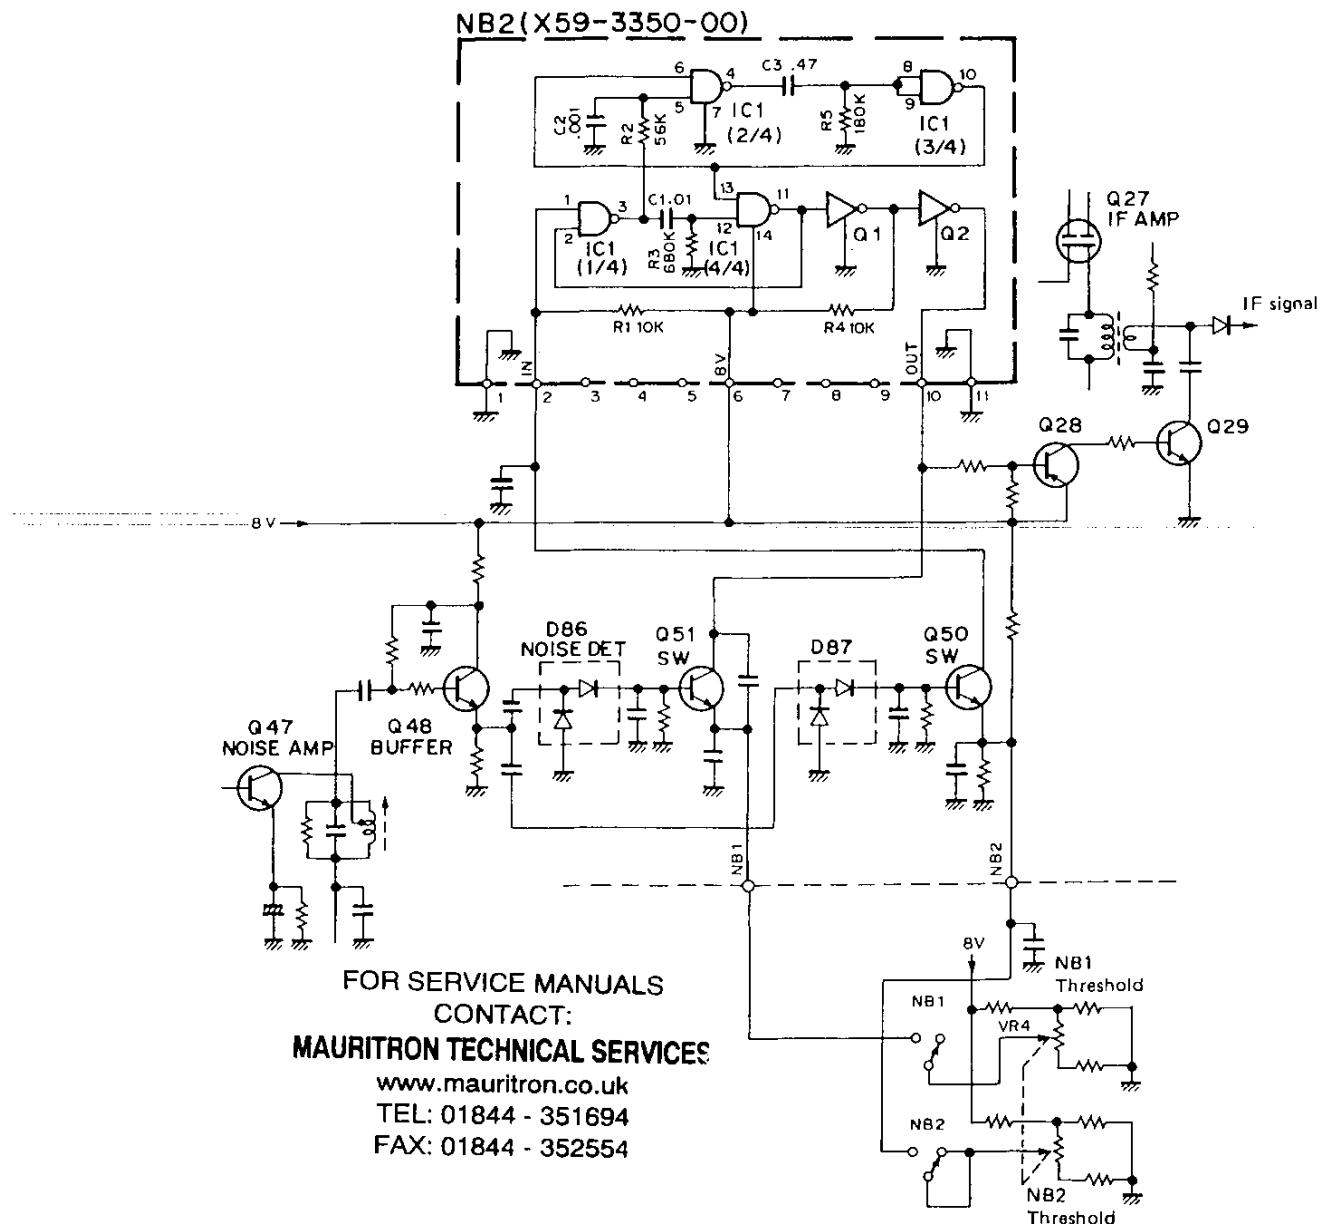


Fig. 4 Noise blunker circuit

CIRCUIT DESCRIPTION

Transmit Circuit Configuration

The transmit system operates utilizing double conversion for SSB, CW and AM and single conversion when operating in the FM mode.

The audio signal from the microphone terminal enters from the switch unit (CN5 "MIC"), and divides into a modulation and a VOX signal. The modulation signal is amplified by approximately 20dB by IC1. Signals from data communications devices enter the ACC2 terminal on the rear panel of the radio and are applied to IC1. The output from IC1 is applied directly to the MIC GAIN control on the front panel and to the FM modulation circuit.

The VOX signal is amplified by Q6 and enters the signal unit (CN501 "VOX"), and then enters the VOX module (X59-1080-00). The output from this module passes through the VOX switch and enters the DELAY TIME module (X59-3360-00) to control the transmitter and receiver.

During SSB and AM operation the signal that passes through the microphone gain control will enter the signal unit (CN1 "MV2"), where it is amplified by Q74 (2SC2712 Y) and applied to the balanced modulator IC3 (AN612). In the AM mode, however, the balance of IC3 is upset to generate the AM signal. Q74 does not operate in FM and

CW modes because the voltage is applied to the emitter thru diode D89. The 455kHz DSB (Double Side Band) signal generated by IC3 passes through the transmit switching diodes D55 and D64, filter switching diodes D56, D57 (SSB), or D57, D60 (AM) to generate the 455kHz SSB or AM signal.

The SSB and AM signals pass through transmit switching diode D55, and are amplified by IF amplifier Q86. The carrier in CW mode optimizes the level past the PIN diode D74. The signal then passes through switching diodes D109, D110, and D122 and enters Q86 (3SK73GR).

Q86 is used to perform ALC (Automatic Level Control) and CW keying.

The 39.6MHz HET signal from the control unit enters the signal unit (CN21 "HET") and is amplified by HET amplifier Q78 (3SK73GR). This HET signal passes through switching diode D100, in the SSB, CW and AM modes, and is fed into the first transmit mixer IC5.

The output from the IF amplifier also enters IC5 and is combined with the HET signal to generate a 40.055MHz signal.

The output from IC5 passes through a MCF, which removes spurious components and enters the second transmit mixer Q79 and Q80 (3SK122L).

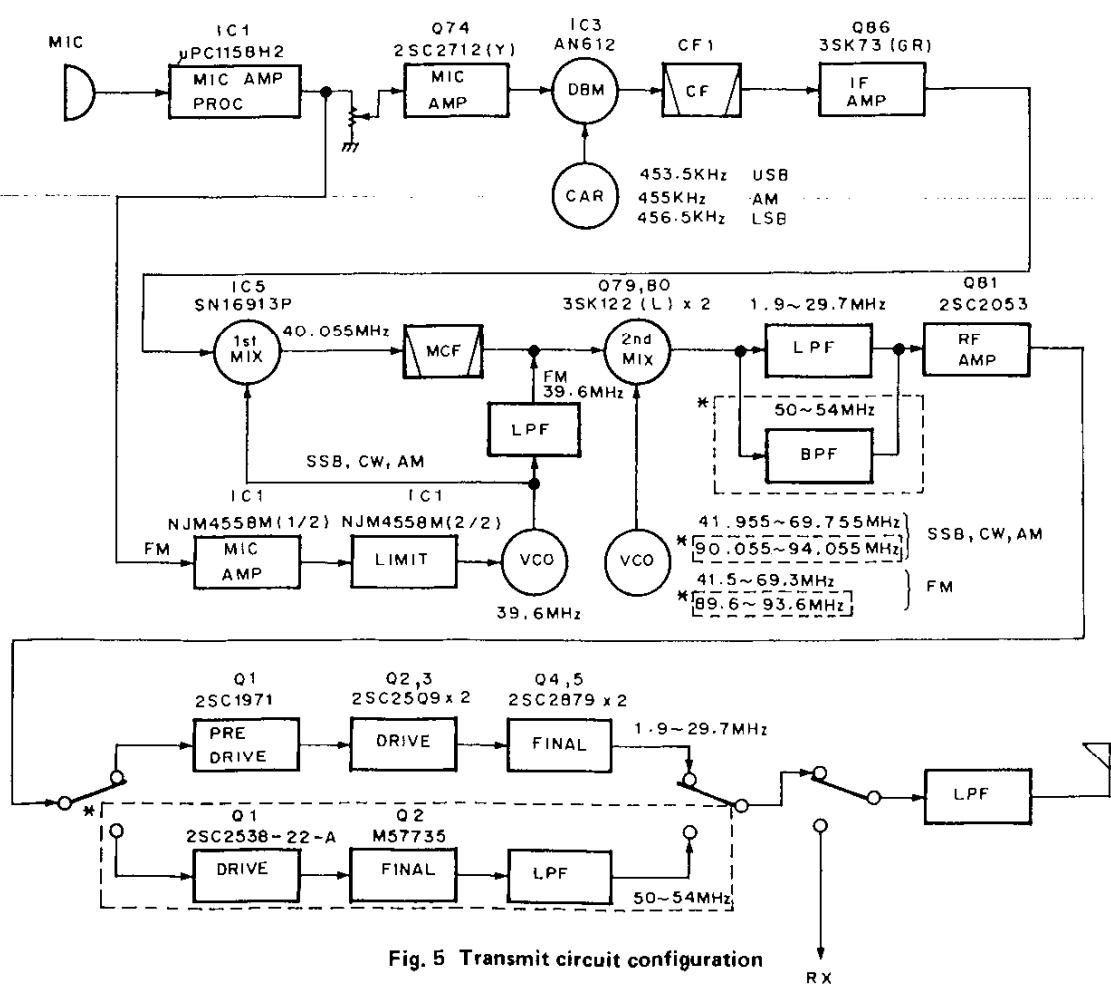


Fig. 5 Transmit circuit configuration

TS-140S/680S

CIRCUIT DESCRIPTION

In FM the output of the MIC amplifier, IC1 of the switch unit, enters the signal unit FM MIC amplifier module (X59-3000-02). This module also functions as the MIC amplifier, limiter circuit, and low-pass filter circuit. The output enters the control unit from the FMM terminal and modulates the 39.6MHz oscillator, VCO4. In modes other than FM, the power of the FM microphone amplifier module is not turned on, and therefore modulation is not affected.

The 39.6MHz signal from the control unit to the signal unit is the HET signal for SSB, AM, and CW modes and the first IF frequency in the FM mode. The IF frequency which enters the signal unit is amplified by IF amplifier Q78. Q78 is the ALC controller. The second gate of Q78 has a fixed bias in modes other than FM, therefore ALC does not function.

The output from Q78 (3SK73GR) passes through switching diodes D101, D102, and D124, a low-pass filter, and is delivered to the final mixer (the second mixer in modes other than FM). Since the IF frequency in the FM mode is different from that in the other modes, the frequency is corrected by the final VCO.

The signal is converted into an actual transmit frequency by the final mixer and passes through the IF trap (40.055 MHz) and low pass filter, is amplified by RF amplifier Q81, and passes through output transformer L111 to become the driver output.

The driver output from the signal unit now enters the final unit.

The output is amplified by final unit transistors Q1, Q2, Q3, Q4 and Q5 to generate a 100W final output. Then enters the filter unit.

The final unit output passes through the transmit/receive switching relay, K16, and individual low-pass filters for each band, and is then applied to the antenna terminal.

The ALC is detected by the output section of the low pass filter.

*The 50MHz band signal is separate from the HF band signal after it passes through the IF trap. This signal for the 50MHz band passes through switching diodes D104, and D106 and a band-pass filter. It is then amplified by RF amplifier Q81 (2SC2053), which is shared by the HF bands. Then the signal passes through the output transformer L11, enters the final unit, and is split from the HF path by relay K1. The signal is then applied to the filter unit. This signal is amplified to the required level by the drive amplifier (Q1) and power module Q2. It passes through the low pass filter, and is supplied to the antenna.

Standby Control Circuit

To switch between transmit and receive for full break-in, or for AMTOR/Packet use, the microprocessor sends various timing signals to control the transmit/receive circuits.

When the standby signal SS from the Standby switch is applied to the microprocessor, three signals are generated, CTX, RB, and CKY. Signals TXB, RXB, and RL are generated based upon these signals to operate the transmit/receive circuit.

The role of each of these signals is described below:

SS: Reference signal to control each signal (standby switch, PTT switch, and key input)

CTX: Control signal from the microprocessor to generate TXB

RB: Control signal to mute the receive signal line

CKY: Control signal for keying

TXB: 8V line for the transmit circuits

RXB: 8V line for the receive circuits

RL: 13.8V line for the transmit circuits

CKB: 8V line for keying generated by CKY

The signal timings are shown in the figure 6.

The timing after the standby switch is switched to transmit and until the system returns to the receive state is as follows:

1. When SS goes low, the microprocessor judges whether the frequency is transmittable or not. If so, the microprocessor switches CTX high 10ms after SS goes low.
2. Module unit (X59-3340-00) receives the CTX signal, and causes TXB and RL to go high.
3. CKY goes high 2ms after TXB goes high, CKB is driven to generate the keying voltage.
4. The transmit signal is emitted approximately 7ms after the CKB is actuated.
5. To return to receive, the transmit signal stops approximately 7ms after the SS line goes high, and TXB and RL return low, as RXB goes high.
6. The RB voltage used for turning on the receive signal line goes high 12ms after RXB goes high, and a signal is received.

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

CIRCUIT DESCRIPTION

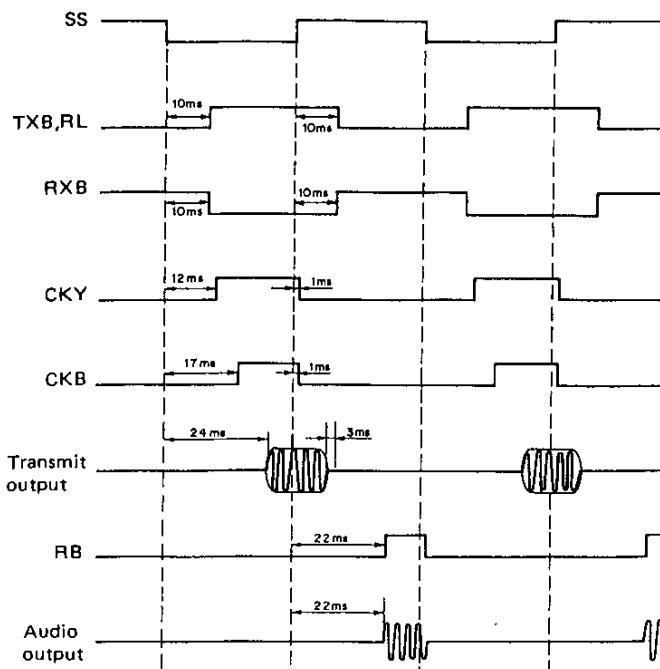


Fig. 6 Transmit/Receive timing chart

Break-in Operation

Manual keying

When the standby switch is turned ON, the base of Q90 (2SA1162Y) goes low, and Q91 (DTC114EK) turns on. CSS goes low, and CTX from the microprocessor turns on Q4 (DTC114EK) of the module unit (X59-3340-00). RL is emitted from Q1 (2SA1204Y), and TXB is applied from Q2 (2SA1204Y). Microprocessor output CKY turns on Q5 (DTC114EK) of the module unit (X59-3360-00), causing the emitter of Q7 (DTC114TK) to go to ground. One end of the Q7 collector is connected to Q87 (2SA1162Y) of the signal unit (X57-3190-00), and the other is connected to the key jack from Q84 (DTC114EK) from the COM terminal via the break-in changeover switch.

Q87 (2SA1162Y) is turned on and produce the CKB voltage when the key is closed, and Q86 (3SK73GR) of the send IF amplifier is keyed.

Semi-Break-In Keying

CW8 is applied to the base of Q84 and Q99. Therefore, they are ready to turn on when the emitter is connected to ground.

When the key is closed, the SEM terminal of the module unit (X59-3360-00) is connected to ground through Q99 and Q84 keys.

Q6 and Q2 in the module unit turn on, and trigger one-shot multivibrator IC1 (MB74LS122). A pulse is output from pin 8 to turn Q1 on and connect the SS line to ground.

When the key is closed, the IC8 output pulse returns to a low level and the SS line goes high after a time constant determined by setting of the VOX delay control VR7 and C254.

The key line switches Q87 via the COM terminal at this same time, and keys Q86 in real time.

Full Break-In

The key connects to the SS line and has the same function as the standby switch. When the key is closed, Q84 turns on, the base of Q90 is connected to the ground, Q91 is turned on, and CSS is switched low. The TXB and RL voltages are generated by the CTX signal, and the CKB voltage is used to generate the CKY signal voltage just as in manual keying.

Full break-in is different from manual keying in that the base of Q87 is controlled directly by the key in manual keying. In full break-in Q87 is controlled via Q5 and Q7 of the module unit (X59-3360-00) by the CKY signal from the microprocessor by turning the SS line on and off.

The reason is that in full break-in, the timing the transmit signal is set so that the radio signal is transmitted after the control signal is completely switched and the transmit system become stable; control is passed to receive after the signal stops, a receive signal is output, and the receive system becomes stable.

TS-140S/680S**CIRCUIT DESCRIPTION**

**FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES**
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352654

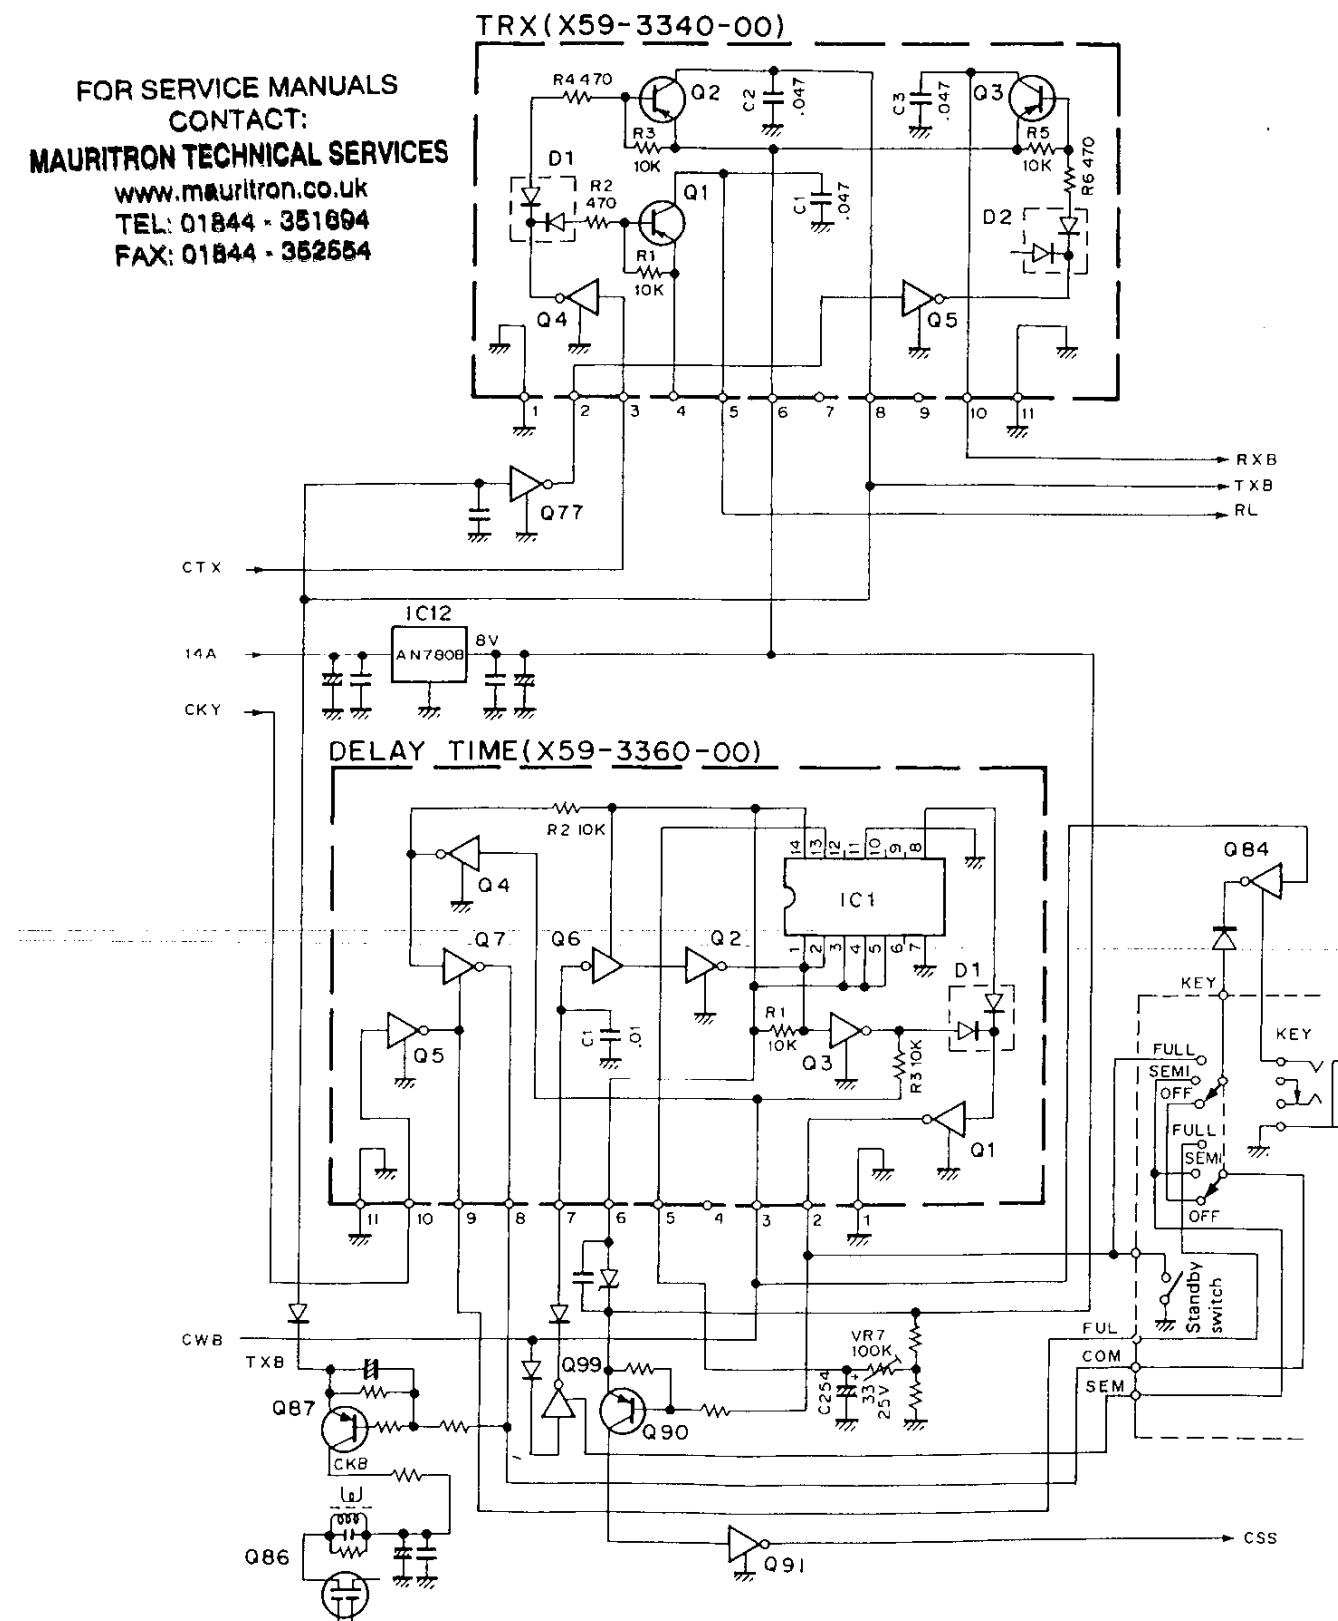


Fig. 7 Standby control circuit

TS-140S/680

CIRCUIT DESCRIPTION

ALC Circuit

A new ALC circuit is used to control the output according to the selected mode.

The output in the HF band is 100W for the CW mode, 110W for the SSB mode, and 50W for FM. therefore, the ALC detection voltage is different for each mode. CW is used and the standard reference mode. The gain of IC11(3/4), in the ALC circuit, is varied according to the mode and transmit power. For example, since the output in FM is 50W the gain of IC11(3/4) must be increased by 3dB, with respect to the CW reference, to correct any deficiencies in the feedback voltage.

*Since the 50MHz band has only 10 watts output the gain of IC11(3/4) is increased by 10dB.

IC11(1/4) controls the ALC and power. IC11(1/4) functions as a differential amplifier in which the signal from IC11(3/4) enters the negative terminal and the power control voltage enters the positive terminal. As the transmitter output increases, the voltage at the negative terminal increases, and the output from IC11(1/4) decreases. When this output falls below the ALC reference of 2.5V, ALC action will begin.

The power is controlled by changing the voltage at the positive terminal of IC11(1/4). For the AM and CW modes the power is fixed at its maximum full power state since the center of VR2 (PC2) is held open.

The power control voltage (PCV) changes with power, voltage and temperature. When the power, or voltage rises, the PCV is limited by zener diode D116 to avoid excessive

power output. When the voltage falls, the power is increased. As the temperature rises, the resistance of thermister TH4 decreases, and the PCV rises, but excessive power output is prevented by the (negative) temperature coefficient of the zener diode. When the temperature falls, the PCV is reduced by the thermister, and power is reduced.

The drive level is also controlled in the FM mode. The input to IF amplifier Q78 (HET amplifier in modes other than FM) is controlled by PIN diode D96. The capacitor connected in parallel is provided to gain the minimum drive level at the maximum power.

VSWR Protection Circuit

To determine a time constant for the reflected wave, the reflected wave voltage is amplified by IC11(2/4) and applied to IC11(3/4) to provide protection.

Temperature Protection Circuit

The temperature detection circuit of the final unit is made modular to reduce its size. The surface temperature of the radiator is as follows:

Cooling fan start	50 deg C
Cooling fan stop.....	45 deg C
Temperature protection start.....	80 deg C
Temperature protection stop.....	70 deg C

When the temperature protection operates the ALC voltage and the power fall. The system does not return to the receive state.

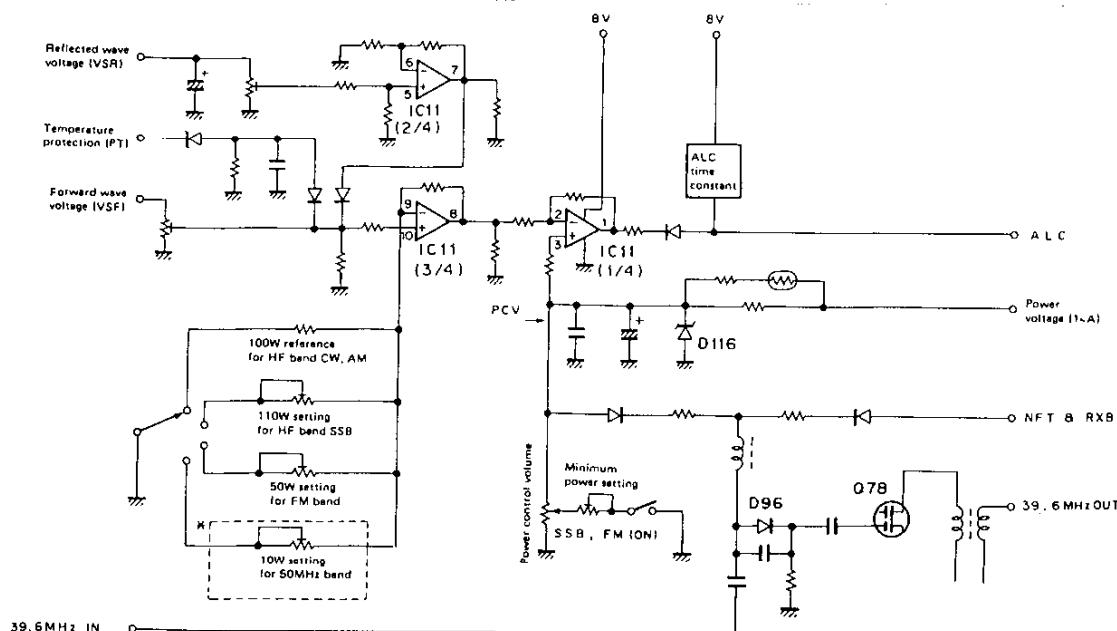


Fig. 8 ALC and power control circuit

TS-140S/680S

CIRCUIT DESCRIPTION

Speech Processor Circuit

The SWITCH UNIT (A/4) IC1 is an audio type speech processor which also function as the first stage microphone amplifier. When the processor switch is OFF, the switch unit operates as a 20dB microphone amplifier. When the processor switch is ON, it operates as an ALC controlled amplifier with ALC with a maximum gain of 40dB.

The compression is set to approximately 20dB when the input signal to the MIC terminal is 10mV.

When the processor switch is ON, 8V DC is applied to the base of the gain adjustment switching transistor. Simultaneously the feedback amplifier begins operating.

When the switch unit is put on stand-by remotely data from terminal units connected to accessory term number 2 (such as packet, and AMTOR) Q2, Q3, and are turned ON, the microphone circuit is muted, the terminal is switched low, thus stabilizing the transmission.

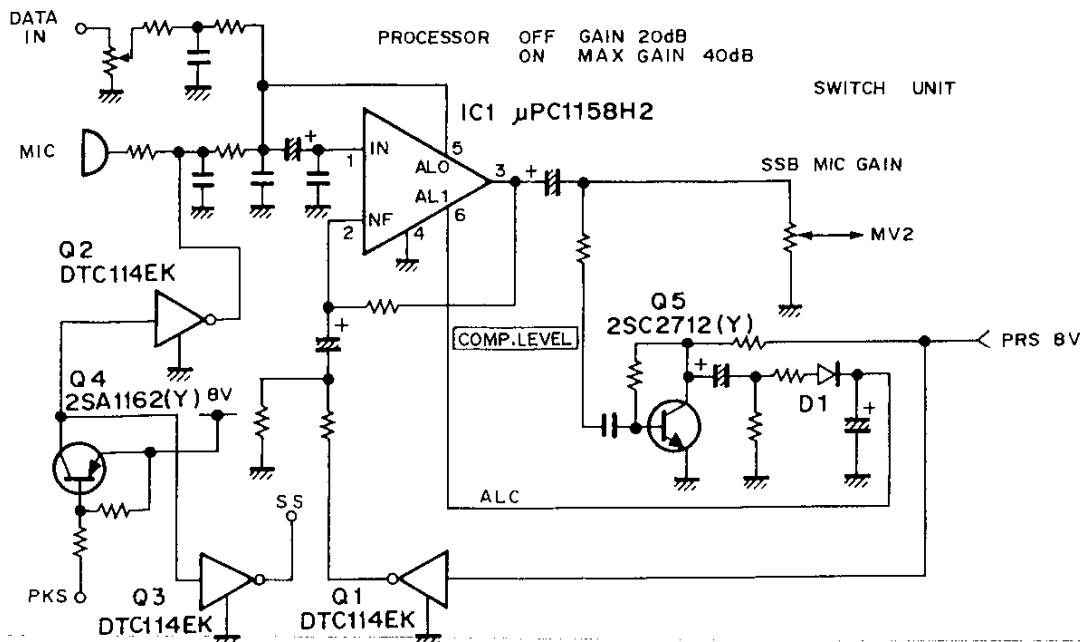


Fig. 9 Speech processor circuit

PLL Circuit

The TS-140 PLL circuit consists of three PLL loops which cover 500kHz to 30MHz in 10Hz steps with a reference frequency of 36MHz.

*The PLL circuit consists of four PLL loops, including 50MHz to 54MHz.

The carrier frequency is inserted into the PLL loop to provide the IF shift function. The carrier circuit PLL loop and the HET circuit PLL loop that always generates a 39.6 MHz frequency are also included. Division ratio data to these PLL loops controlled by the microprocessor. A single crystal frequency management method, in which phases are compared with that of a reference frequency fSTD, is used for this transceiver.

The block diagram of the PLL circuit is provided in figure 10.

The reference frequency fSTD, which is used as a basis for TS-140 frequency control, is generated by a 36MHz crystal and oscillator Q9 (2SC2787L). The fSTD passes through buffers Q10 and Q12 (2SC2668Y), enters IC10 (SN16913P), passes through a LPF, and enters IC11 (SN16913P). This signal passes through buffer Q11 (2SC2668Y), and is divided by 8 in IC8 (M74LS93P) to generate a 4.5MHz signal. This signal passes through a LPF, and enters IC9 and IC11 (SN16913P) in the main loop. The signal passes through a LPF, and become the 4.5MHz reference frequency, fR, for each PLL circuit.

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

CIRCUIT DESCRIPTION

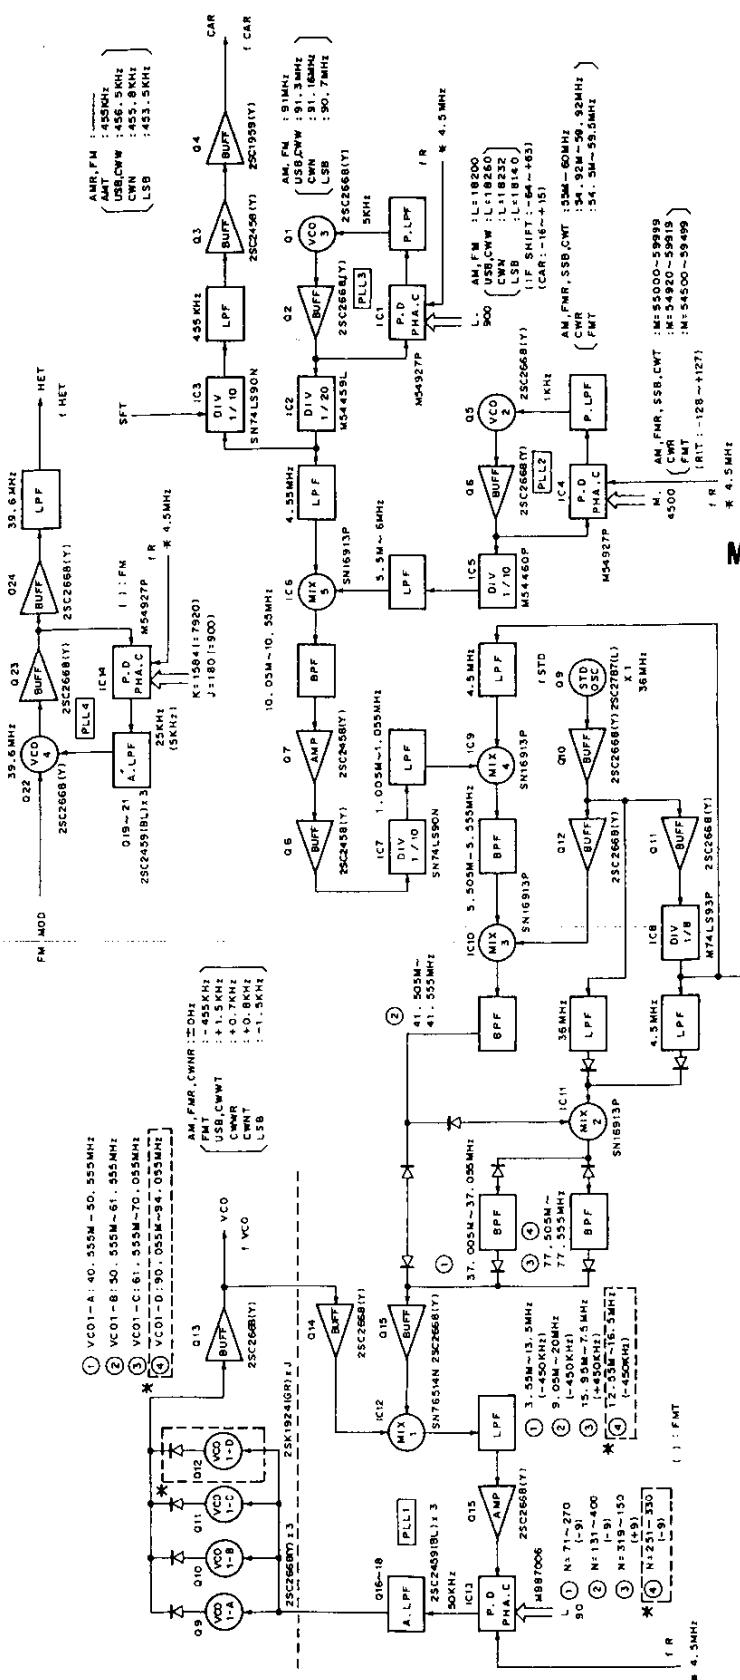


Fig. 10 PLL block diagram

13

**FOR SERVICE MANUALS
CONTACT:
URITRON TECHNICAL SERVICES**

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

TS-140S/680S

CIRCUIT DESCRIPTION

PLL4

PLL4 consists of IC14 (M54927P), and VCO4, Q22 (2SC2668Y), is locked at 39.6MHz. The 4.5MHz reference frequency, f_R , is applied to IC14 pin 15, and is divided internally by 180 (900 for FM) to generate a comparison frequency of 25kHz (5kHz for FM). The from VCO4 output passes through buffer Q23(2SC2668Y), applied to IC14 pin 3, and divided internally by 1584 (7920 for FM). The resulting signal is compared with the 25kHz (5kHz for FM) reference signal by the phase comparator, thus locking VCO4. Division ratios K and J are transmitted from digital control circuit via DA, CK, and PR4.

The output from PLL4 passes through Q24 (2SC2668Y) and a LPF and is fed into the signal unit as the HET signal.

PLL3

PLL3 consists of IC1 (M54927P), and VCO3, Q1 (2SC 2668Y), is locked at about 91MHz with a frequency that varies with the mode.

The 4.5MHz reference frequency, f_R , is applied to IC1 pin 15, and divided internally by 900 to generate a 5kHz comparison frequency. The output from VCO3 passes through buffer Q2 (2SC2668Y), is applied to IC1 pin 3, and multiplied internally by the division ratio (about 1/18200) determined according to the mode. The resulting signal is compared with the 5kHz reference signal by the phase comparator, thus locking VCO3. Division ratio L is transmitted from the digital control circuit via DA, CK, and PR3.

The PLL3 output is divided by 20 in IC2 (M54459L), and directed to two circuits. One signal enters IC3 (SN74 LS90N) of the carrier circuit, is divided by 10, passes through a LPF, buffers, Q3 (2SC2458Y) and Q4 (2SC 1959Y) and fed into the signal unit as a carrier signal. During AM reception and AM/FM transmission, IC3 operation is stopped by the SFT data signal to remove the carrier signal.

The other signal is divided by 20, passes through a LPF, and enters MIX5 IC6 (SN16913P) in the main loop, which is part of the digital VFO. Therefore, the operating frequency remains unchanged even if the carrier frequency is changed to implement features, such as USB/LSB mode switching, IF shift, and fine adjustment of the carrier point. IF shift allows a shft of $\pm 1\text{kHz}$ or more during SSB and CW receive. The carrier point can be finely adjusted, in the SSB mode, thru a range of -400Hz to $+375\text{Hz}$.

PLL2

PLL2 consists of IC4 (M54927P), and VCO2, Q5(2SC 2668Y), is locked thru a range of 55MHz to 59.999MHz, except in CW receive and FM transmit. The 4.5MHz reference frequency, f_R , is applied to IC4 pin 15, and divided internally by 4500 to generate a 1kHz comparison frequency. The from VCO2 output passes through buffer Q6 (2SC2668Y), is applied to IC4 pin 3, and divided internally by M. The resulting signal is compared with the 1kHz reference signal, by the phase comparator, thus locking VCO2. Division ratio, M, is transmitted from the digital control circuit as division data in 4,999 steps (55,000 to 59,999) corresponding to the range of 0.00kHz to 49.99kHz or 50.00 kHz to 99.99kHz via DA, CK., and PR2.

Correction is performed according to the mode and RIT operation. To obtain the 800Hz beat tone obtained during CW reception, M is shifted (54,920 to 59,919) by about 80. Since the VCO1 output frequency during FM transmit is 455kHz lower than thatduring receive, it is corrected 5kHz (54,500 to 59,499) by VCO2. (450kHz is corrected by PLL1.) When the RIT is operating, the M division ratio is varied so that the from VCO1 output frequency is shifted $\pm 1.2\text{kHz}$ or more.

In AM and FM modes, the frequency is shifted 10 steps, and operates in 100Hz steps as shown in the frequency display.

The PLL2 output is divided by 10 in IC5 (M54460L), passes through a LPF, and is applied to pin 2 of MIX5 IC6 (SN16913P). The signal is mixed with the signal generated by PLL3, passes through a BPF, and become a signal of 10.05MHz to 10.5499MHz, in 100Hz steps. The signal passes through amplifier Q7 (2SC2458Y), buffer Q8 (2SC 2458Y), is divided by 10 in IC7 (SN74LS90N), passes thru a LPF, and is applied to pin 2 of MIX5 IC9 (SN16913P). The signal is mixed with the 4.5MHz signal generated by dividing the reference frequency by 8 in MIX4 (SN16913P), passes through a BPF, become a signal of 5.505MHz to 5.55499MHz in 10Hz steps, and is applied to pin 2 of MIX3 IC10 (SN16913P). In addition, the signal is mixed with the 36MHz reference frequency by MIX3, passes through a BPF, and become a signal of 41.505MHz to 41.50499MHz.

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

CIRCUIT DESCRIPTION

PLL1

The final PLL1 loop consists primarily of IC13 (MB 87006). The final VCO1 is located in the signal unit, and consists of three VCOs, VCO1A to VCO1C, that cover a dial frequency of 500kHz to 30MHz. (*The final VCO1 consists of four VCOs, VCO1A to VCO1D, in the range of 50MHz to 54MHz.) Any of the VCOs can be selected according to band information from the digital control circuit. The VCO1 signal passes through buffer Q13 (2SC2688Y) of the signal unit, and is applied to the PLL circuit of the control unit. This signal passes through buffer Q14 (2SC 2668Y), and is applied to pin 5 of MIX1 IC12 (SN76514N). The signal is mixed with the signals generated by PLL3 and PLL2. This input signal is also divided into three signals according to band information.

One of the signals generated in the previous loop is applied directly to buffer Q13 (2SC2668Y) by the diode switch according to the band information. The other signal is applied to pin 2 of MIX2 IC11 (SN16913P). When the operating frequency is 500kHz to 10.5MHz, the signal is mixed with the 4.5MHz signal generated by dividing the reference signal by 8 in MIX2, passes through a BPF, become a signal of 37.005MHz to 37.05499MHz, and is applied to buffer Q13. When the operating frequency is 10.5 MHz to 21.5 MHz, the signal is applied directly to buffer Q13 without passing through MIX2. When the operating frequency is 21.5MHz to 30MHz, the signal is mixed with the reference frequency in MIX2, passes through a BPF, becomes a signal of 77.505MHz to 77.55499MHz, and is applied to buffer Q13.

*When the operating frequency is 50MHz to 54MHz, the signal is processed in the same way as the signal for 21.5MHz to 30MHz.

These signals are applied to pin 11 of MIX1 IC12 through buffer Q13. The difference signal passes through a LPF to become a signal of 3.55MHz to 20MHz, passes through amplifier Q15 (2SC2668Y), and is applied to pin 8 of PLL IC13.

The 4.5MHz reference frequency, fR, is applied to IC13 pin 1, and divided internally by 90 to generate a 50kHz comparison frequency. The signal input to IC13 is divided by N, and compared with the 50kHz reference signal, by the phase comparator. The signal passes through an active LPF, Q16 to Q18 (2SC2459BL), and is sent to the signal unit as the VCO voltage, to control the varactor diode of the last VCO1.

Division ratio, N, covers the overall operating frequency range in 50kHz steps, except during FM transmit. During FM transmit, N is shifted 9 steps (450kHz) so that the VCO1 output frequency becomes - 455kHz. The division ratio is sent from the digital control circuit via DA, CK, and PR1.

Therefore, the final output of PLL1 is 40.555MHz to 70.05499MHz (shifted by - 455kHz for FM transmission) as determined by the values of L, M, and N, in 10Hz steps.

*The final output of PLL is 40.555MHz to 70.05499MHz or 90.055MHz to 94.05499MHz in 10Hz steps.

UNLOCK Detection

If any PLL loop becomes unlocked, pin 11 of IC1, IC4, IC14 and/or pin 7 of IC13 go low, and act as an OR circuit. These signals pass through switching transistors Q25 (DTA 124ES) and Q26 (DTA124ES), and the "L" is sent to the digital control circuit.

At this point, the microprocessor will display the unlock status, and emits the SBK signal to stop the IF signal before the filter via Q29 (2SC2712Y), and the MUTE signal for stopping the audio signal via Q57 (2SC2712Y) before entering the volume control.

50kHz Marker Signal

IC13's 50kHz comparison frequency is emitted from pin 13 and used as a marker signal.

TS-140S/680S

CIRCUIT DESCRIPTION

Digital Control Circuit

Configuration of microprocessor peripheral circuits

As shown in figure 11, the units around microprocessor IC18 (BU18400A) include 16K ROM, IC21 (MBM27C128-25JAJ2), 2K static RAM, IC20 (TC5518CPL), extended I/O IC (TMP8255AP-5; IC22 and IC23 for output only, and IC24 for input only), encoder processing gate array IC26 (LZ92K37), and the microprocessor optional IF-IOC communication IC (μ PD8251AFC). The microprocessor address signal is selected by transmitting the chip select signal from IC19 (SN74LS138N). IC15 (PST520D) generates a reset signal according to changes in the 5V line, to reset the microprocessor, the extended I/O IC, and communications IC. The reset signal is also sent to RAM to prevent data destruction due to shock noise when switching power on and

off. IC16 (TC4069UBP) rectifies the waveform of the reset signal, and also functions as the buzzer oscillator circuit and system clock oscillator circuit. The timer IC, IC17 (NE555C), generates an AC signal for dynamic lighting of the fluorescent display tube, and gives an interrupt signal to the microprocessor. The dynamic lighting function is controlled by the microprocessor. The μ PC6300C is the fluorescent display tube driver IC. IC27 (MB4052) is an A/D converter IC to which a voltage corresponding to the rotational position is applied by a variable resistor such as the RIT. IC25 (TC4069UBP) operates as a chatter absorption circuit for the mechanical-type sub-dial rotary encoder.

Most of these circuit are located in the control unit, but the fluorescent display tube, drive IC (μ PD6300C), and voltage generation DC/DC module (CPS1175B) are in the display unit.

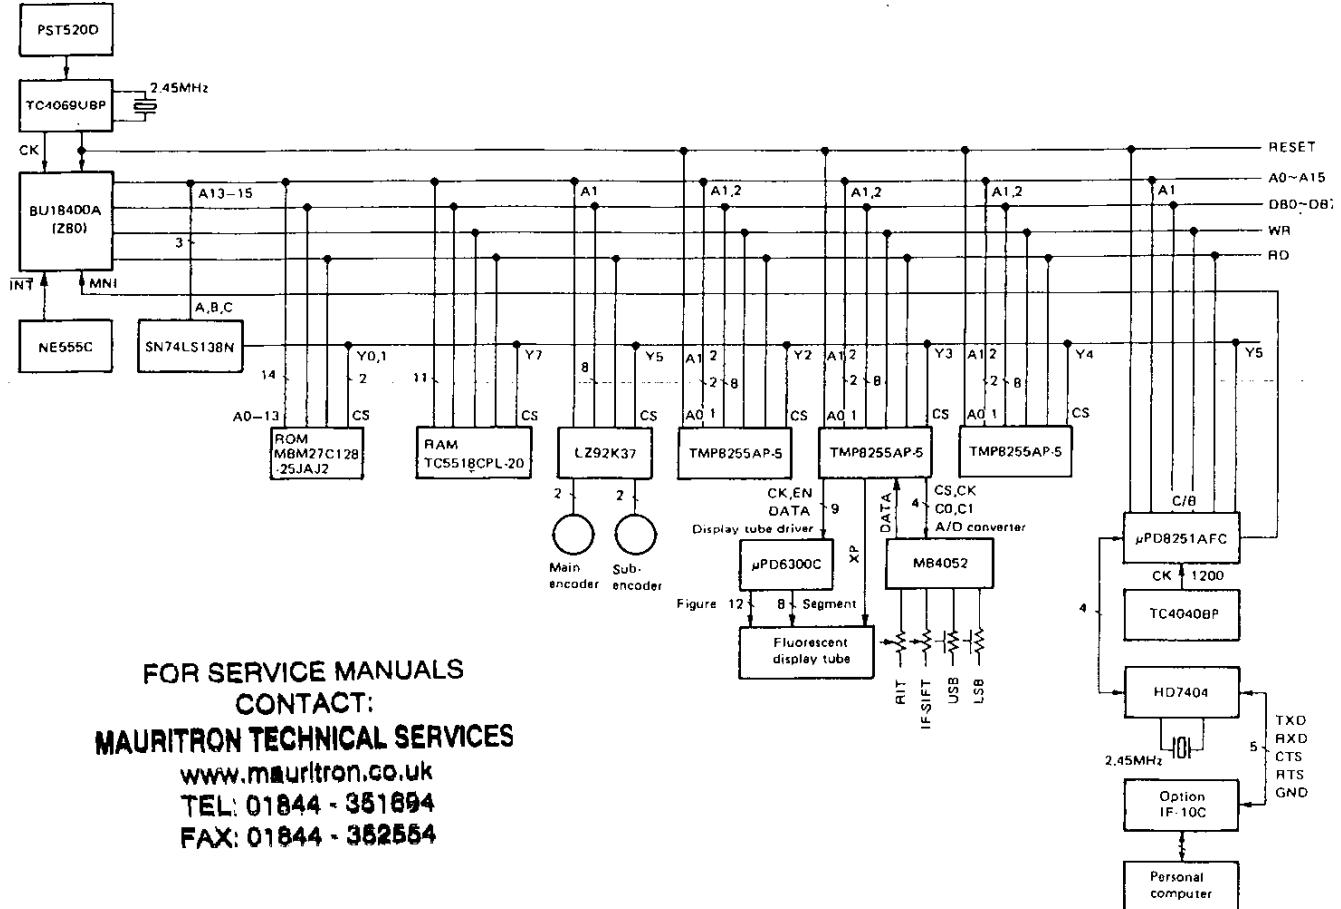


Fig. 11 CPU peripheral circuit

CIRCUIT DESCRIPTION

System Clock Oscillation and System Reset Circuit

Microprocessor IC18 (BU18400A) requires a 2.45MHz system clock. Ceramic oscillator X2 and IC16 (TC4069UBP) are used to generate the system clocks (figure 12).

IC15 (PST520D) is a reset IC which sends a reset signal to the microprocessor and I/O when the power supply voltage reaches about 4.3V, which halts all function immediately. When the power supply voltage exceeds approximately 4.3V, the reset signal is emitted and after the time constant set by R151 and C219 elapses, the microprocessor is initialized and operation resumes (figure 13).

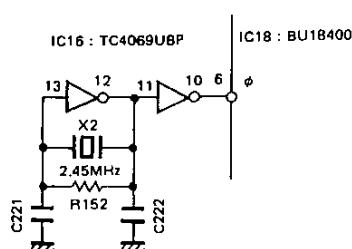


Fig. 12 System clock oscillation circuit

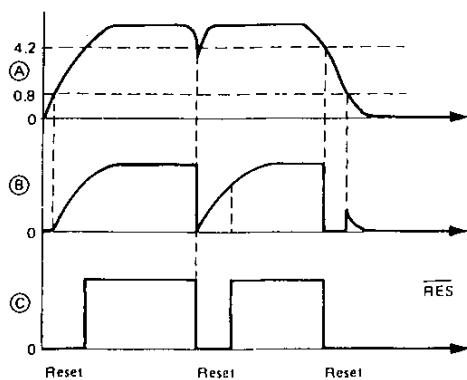
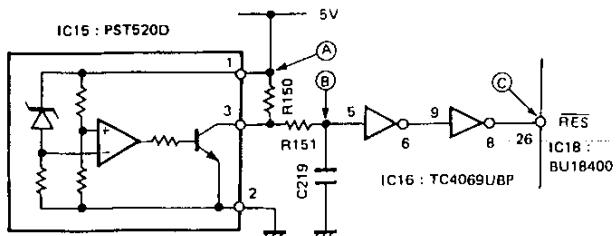


Fig. 13 Reset circuit

Address Control

Microprocessor address lines A0 to A15 cannot select ICs directly, so they are decoded into selection signals by IC19 (SN74LS138N). IC19 has a 64K-bytes memory area which is divided equally into 8 blocks (8K bytes each) and assigned to the ICs. Address control division is shown in figure 14.

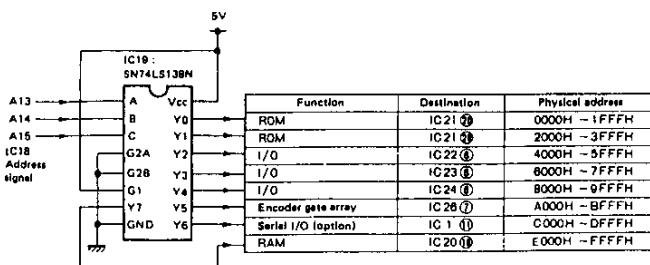


Fig. 14 Address control division

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

TS-140S/680S

CIRCUIT DESCRIPTION

Encoder Peripheral Circuit

IC26 (LZ92K37) detects the rotational direction from the dual-phase rotary encoder pulse input, counts up or down, and has two inputs. CK1 and CK2 count all leading and trailing pulse edges, and performs quadruple functions. CK3 and CK4 count the leading and trailing edges of CK3, and performs dual functions. The main dial is an optical type, which inputs signals directly. The sub-dial is a mechanical type, which inputs signals through the chatter absorption circuit.

Count data can be read in the same manner as when reading RAM. CK1 and CK2 have one counter, CK3 and CK4 have another counter. When IC26 A0 is low, the CK1 and CK2 data is read. When A0 is high, the CK3 and CK4 data is read.

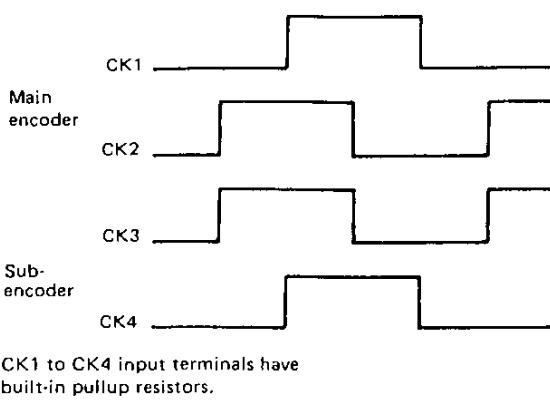


Fig. 16 Waveforms of IC26, CK1 to CK4,
when the dial is turned clockwise

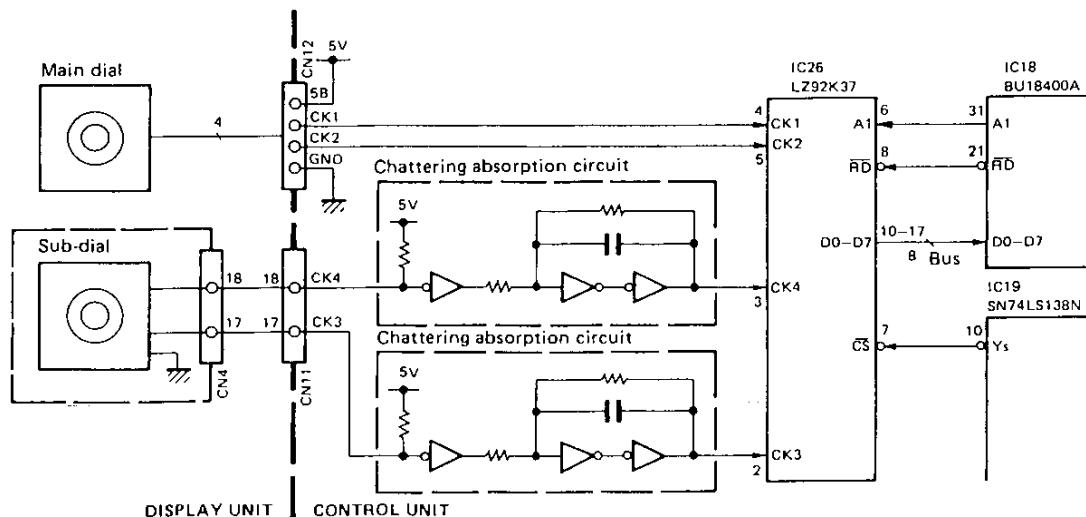


Fig. 15 Encoder peripheral circuit

Display Circuit


The fluorescent display tube is dynamically lit by IC18 (BU18400). The lighting period for one column is given by a negative pulse of IC17 (NE555C). When a low level is applied to the INT input, IC18 starts its interrupt procedure, outputs one column of display data, and the column signal to the fluorescent display tube driver MPD6300C through IC23 (TMP8255AP-5), and outputs data and control signal to the XP terminal, via IC22 port C7. Normally, one cycle ends when the data and signal are output 12 times, since there are 12 columns. However, for yellow (mode) display columns, the data and signal are output 3 times in one cycle because of a lack of sufficient intensity.

Display unit, T1, is the DC/DCE module which generates the drive voltage and filament voltage of the fluorescent display tube. The filament voltage waveform is generated by the oscillator circuit in that module. The frequency fluctuates because the column loads differ from each other, causing a variation in the oscillator frequency. The μ PD 6300C input waveforms are seen in each of the oscillator periods of IC17 (See figure 18). Data is shown in figure 19. It is output from the left.

**FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES**

www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

CIRCUIT DESCRIPTION

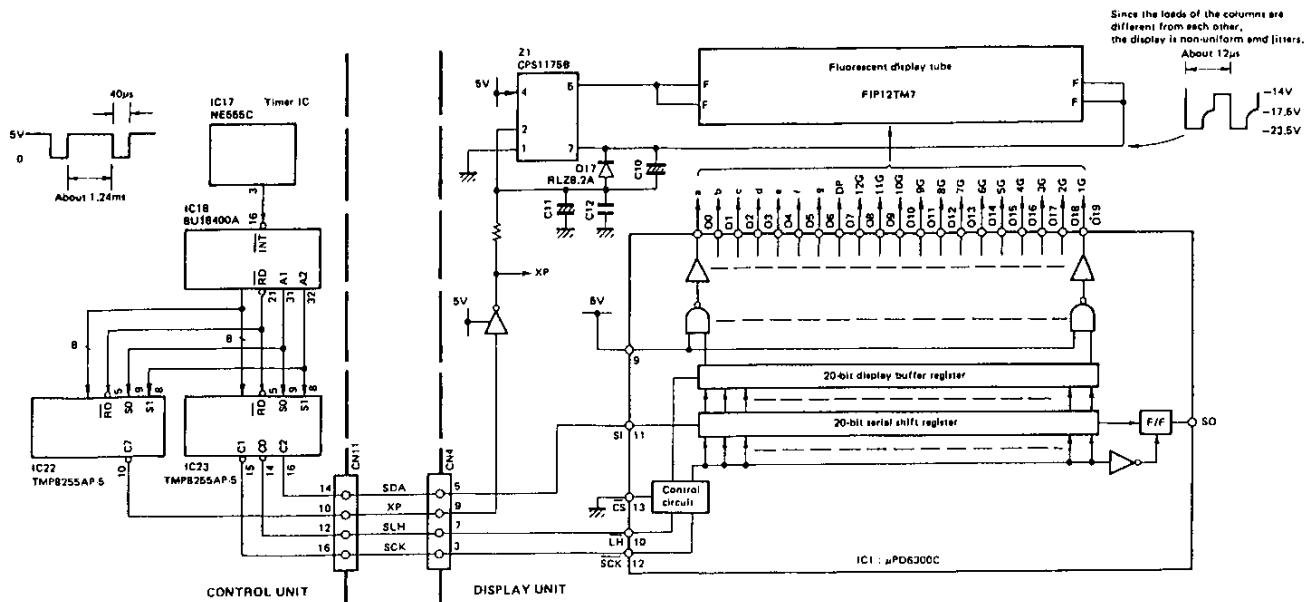

TS-140S/680S

CIRCUIT DESCRIPTION

Band Output

The BPF and LPF are switched by output ports A0 to A4 (B0 to B4) of IC22 (TMP8255AP-5). The PLLs are switched by output ports C4 to C6 (V81 to VB3). The levels of the ports in each frequency range are shown in the figure below:

Freq' (MHz)	B4	B3	B2	B1	B0	VB3	VB2	VB1
0 - 0.5	H	L	L	L	L	L	L	H
0.5 - 1.6	H	L	L	L	H	L	L	H
1.6 - 2.5	L	L	L	H	L	L	L	H
2.5 - 4.0	L	L	L	H	H	L	L	H
4.0 - 6.5	H	L	H	L	L	L	L	H
6.5 - 7.5	L	L	H	L	H	L	L	H
7.5 - 10.5	H	L	H	H	L	L	H	L
10.5 - 14.5	L	L	H	H	H	L	L	L
14.5 - 19.0	H	H	L	L	L	L	L	L
19.0 - 21.5	L	H	L	L	L	L	L	L
21.5 - 25.0	H	H	L	L	H	H	L	L
25.0 - 30.0	L	H	L	L	H	H	L	L
50.0 - 54.0	L	H	L	H	L	H	L	L

Table 6

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

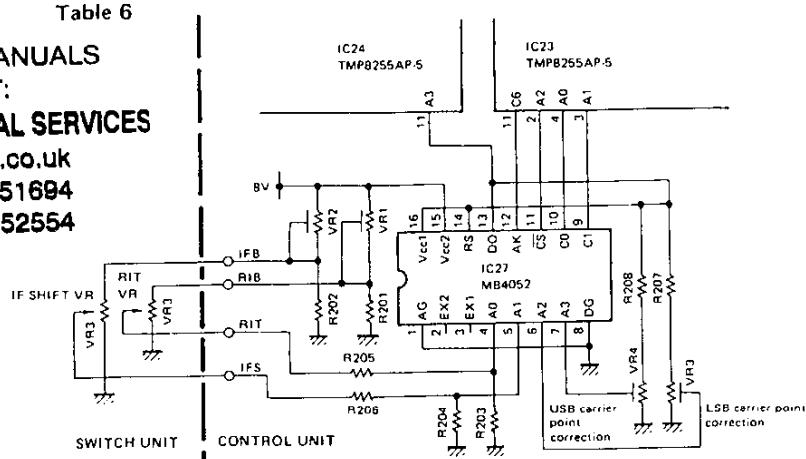


Fig. 24 A/D converter peripheral circuit

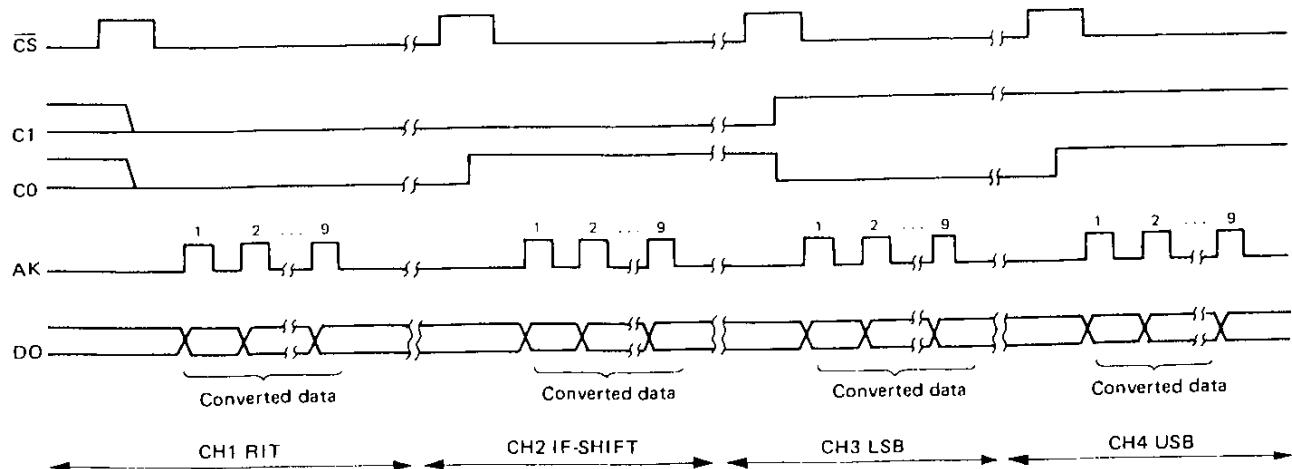


Fig. 25 A/D converter data read timing chart

CIRCUIT DESCRIPTION

Key Scan and Extended Diode

A key scan signal with a negative pulse is sent from ports B4 to B7 and C5 of IC23 (TMP8255AP-5). One column, corresponding to ports B0 to B3 of IC24 (TMP8255AP-5) is selected, and the ON/OFF state of the switch is sensed. When the switch at an intersection of the matrix is on, the corresponding bit of ports B0 to B3 of IC24 goes low, thus detecting. The activation of the switch.

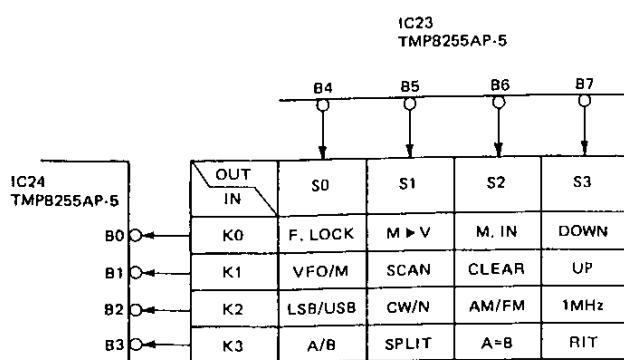


Fig. 26

Transmit Timing Control Signal

The full Break-in timing is generated by the microprocessor, and is sent as the CTX, RB, and CKY signals from port C of IC22 (TMP8255AP-5). When transmit/receive switching is detected at port A6 of IC24 (TMP8255AP-5), the CSS signal is output with the following timing.

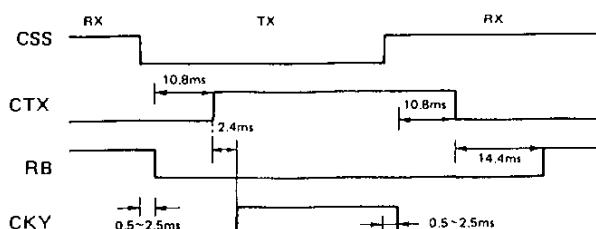


Fig. 27

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

SFT Output

The SFT output signal is output during FM and AM reception, and stops the CAR output.

TOB Output

The TOB output is stored in the memory channel, split channel, in FM mode, and output only during transmission. Repeater subtone control signal.

14V Input

To clear any meaningless display when the power switch is turned on or off, the 13.8V line is monitored. When this input goes low, the display is cleared.

SBK and MUT Output

This signal cuts the PLL switching noise.

I/O port functions

1) IC22 (Output only)



Terminal Name	Pin No.	Symbol	Function	Active level
A0	4	B0	Band switching output. (See the text.)	H
A1	3	B1		
A2	2	B2		
A3	1	B3		
A4	40	B4	Unused.	H
A5	39	50M		
A6	37	HFL		
A7	37	HFL		
B0	18	MUT	Cut the AF signal.	H
B1	19	PD	28MHz band power down.	H
B2	20	SBK	Cut the RF signal.	H
B3	21	CWN	Indicates CW-N.	H
B4	22	FM	Mode output.	H
B5	23	AM		
B6	24	CW		
B7	25	SSB		
C0	14	CTX	Transmit control signal. (See the text.)	H
C1	15	RB		
C2	16	CKY		
C3	17	TOB	Output the subtone (Option).	H
C4	13	PB0	PLL band switching signal. (See the text.)	H
C5	12	PB1		
C6	11	PB2		
C7	10	XP	Fluorescent display tube red letter segment signal.	L

TS-140S/680S**CIRCUIT DESCRIPTION/SEMICONDUCTOR DATA****2) IC23 (Output only)**

Terminal Name	Pin No.	Symbol	Function	Active level
A0	4	C0	IC27:MB4052 control signal. (See the text.)	
A1	3	C1		
A2	2	CS		
A3	1	SFT	CAR cut signal.	H
A4	40	PR1		
A5	39	PR2	PLL enable signal. (See the text.)	
A6	38	PR3		
A7	37	PR4		
B0	18	LF	F. LOCK LED signal.	H
B1	19	LM	M.SCR LED signal.	H
B2	20	L1	1MHz LED signal.	H
B3	21	—	Unused.	
B4	22	S0		
B5	23	S1	Key scan output. (See the text.)	L
B6	24	S2		
B7	25	S3		
C0	14	SLH	Fluorescent display tube drive IC signal. (See the text.)	
C1	15	SCK		
C2	16	SDA		
C3	17	EN	Unused.	
C4	13	DA	PLL data signal. (See the text.)	
C5	12	CK		
C6	11	AK	IC27:MB4052 control signal. (see the text.)	
C7	10	BZ	Turns the buzzer oscillator circuit on.	H

3) IC24 (Input only)


Terminal Name	Pin No.	Symbol	Function	Active level
A0	4	—	Unused.	
A1	3	—		
A2	2	UL	Detect the unlock state.	L
A3	1	AD	IC27:MB4052 data signal.	
A4	40	MU	MIC UP/DOWN switch.	L
A5	39	MD		
A6	38	CSS	CSS line signal transmission detection.	L
A7	37	14V	Power switch off detection.	L
B0	18	—		
B1	19	—		
B2	20	—		
B3	21	—	Unused.	
B4	22	—		
B5	23	—		
B6	24	—		
B7	25	—		
C0	14	—		
C1	15	—		
C2	16	—		
C3	17	—		
C4	13	—		
C5	12	—		
C6	11	—		
C7	10	—		

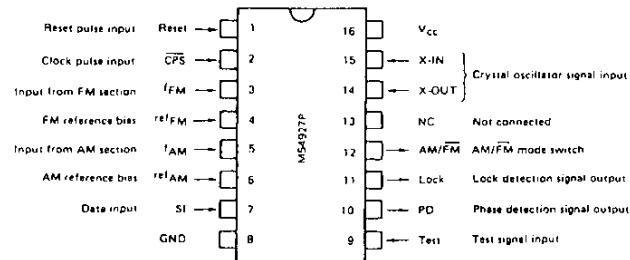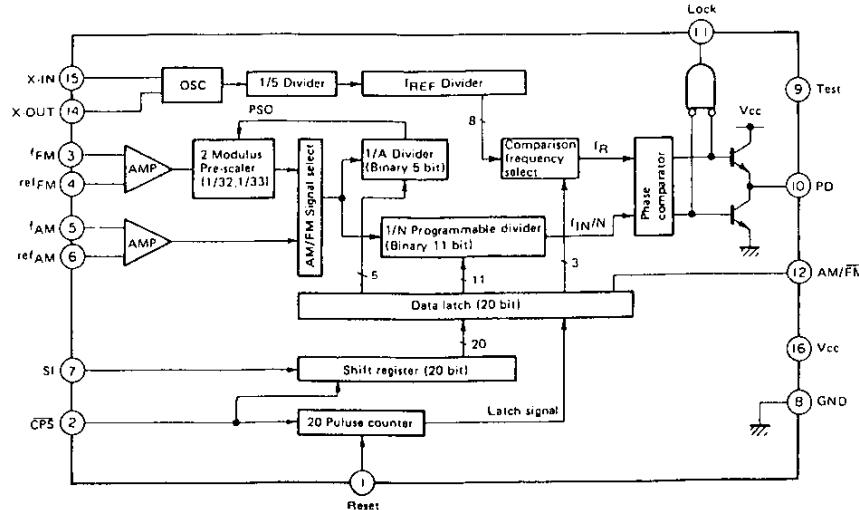M54927P : PLL IC (Control unit IC1, 4, 14)**● Terminal connection diagram****● Block diagram**

SEMICONDUCTOR DATA

M54459L : Divider (Control unit IC2)

• Terminal connection diagram

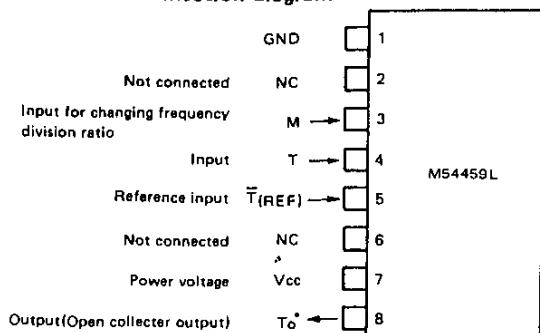


• Input for changing frequency division ratio (M) and division ratio


M	"L"	"H"
Division ratio	1/20	1/100

M54460L : Divider (Control unit IC5)

• Terminal connection diagram

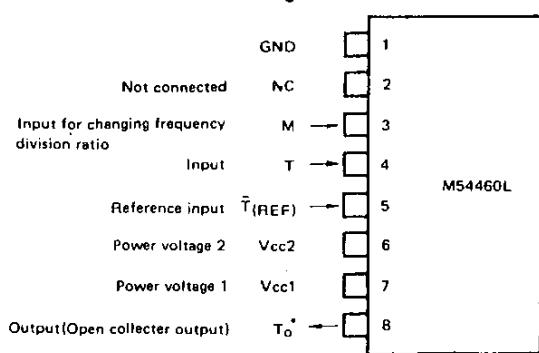

• Block diagram

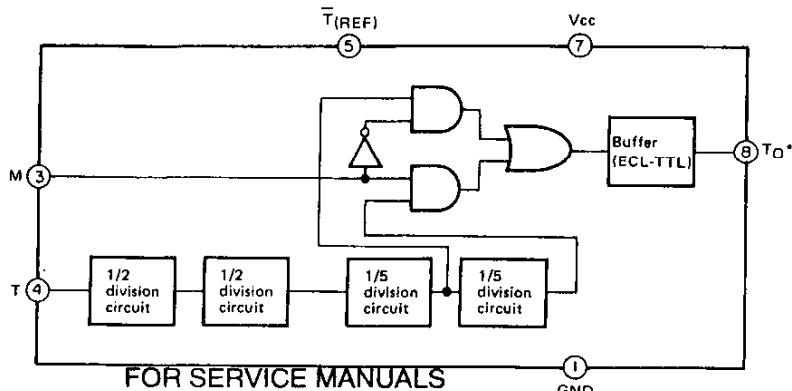

FOR SERVICE MANUALS

CONTACT:


MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694


FAX: 01844 - 352554

• Block diagram

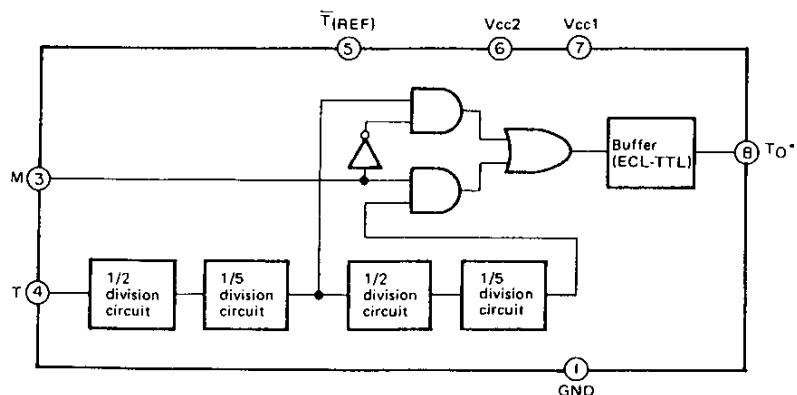





M74LS93P : Divider (Control unit IC8)

• Terminal connection diagram

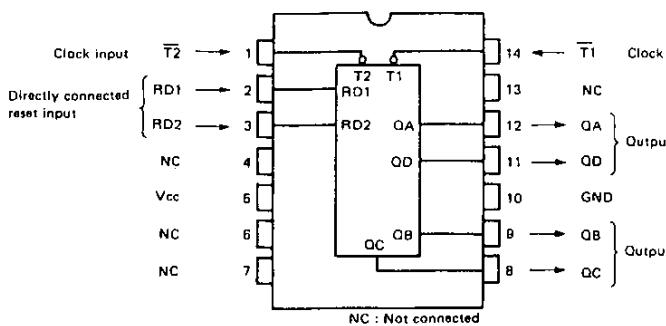


• Logic circuit

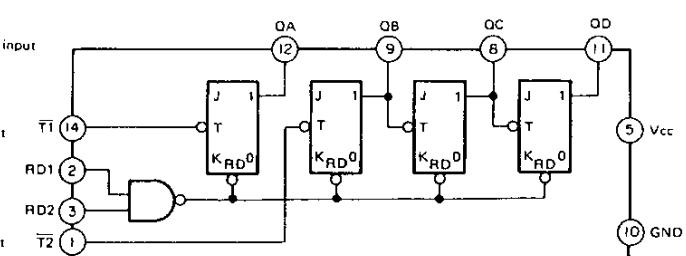

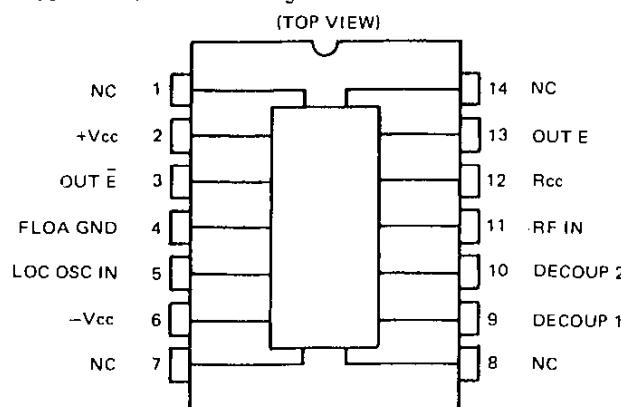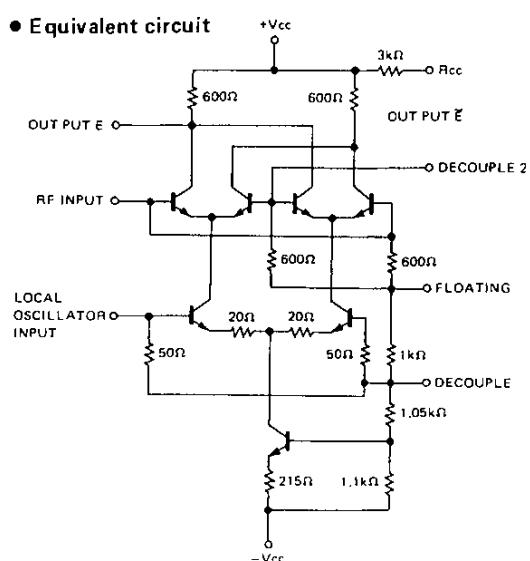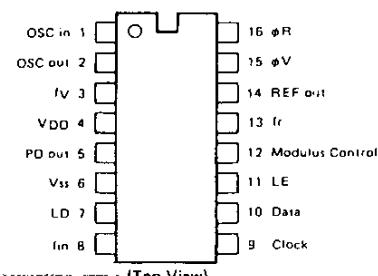TS-140S/680S**SEMICONDUCTOR DATA****SN76514N : Mixer (Control unit IC12)****• Terminal connection diagram****• Equivalent circuit****MB87006 : PLLIC (Control unit IC13)****• Terminal connection diagram****• Terminal function**


Terminal No.	I/O	Terminal name	Terminal No.	I/O	Terminal name
1	I	OSC in	9	I	Clock
2	O	OSC out	10	I	Data
3	O	fV	11	I	LE
4	-	VDD	12	O	Modulus Control
5	O	PD out	13	O	fr
6	-	VSS	14	O	REF out
7	O	LO	15	O	φV
8	I	fin	16	O	φR

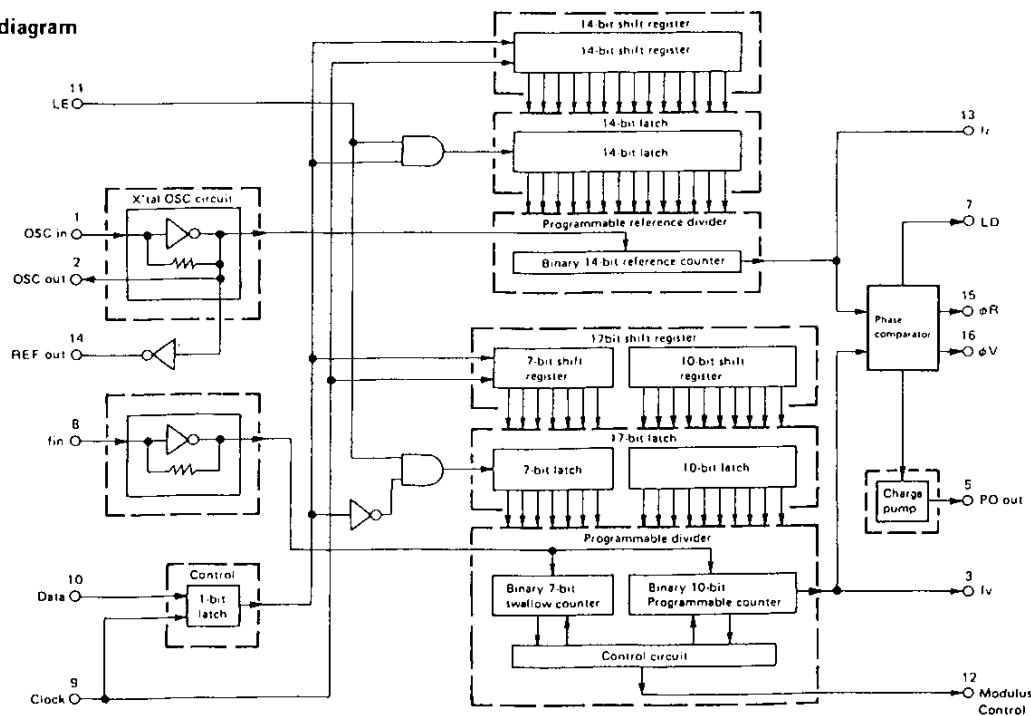• Block diagram

SEMICONDUCTOR DATA


PST520D : System reset (Control unit IC15)

- Equivalent circuit

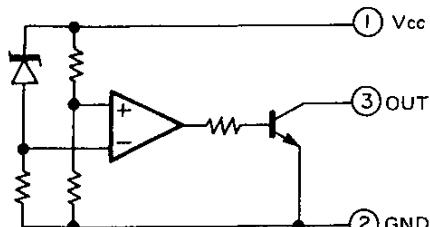


TC4069UBP : Inverter (Control unit IC16,25)

- Block diagram




NE555C : System clock oscillator (Control unit IC17)

- Terminal connection diagram

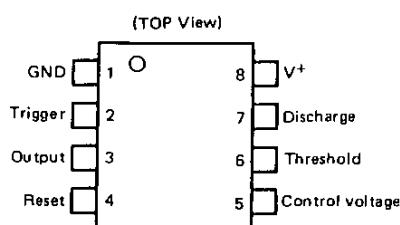


- Equivalent circuit

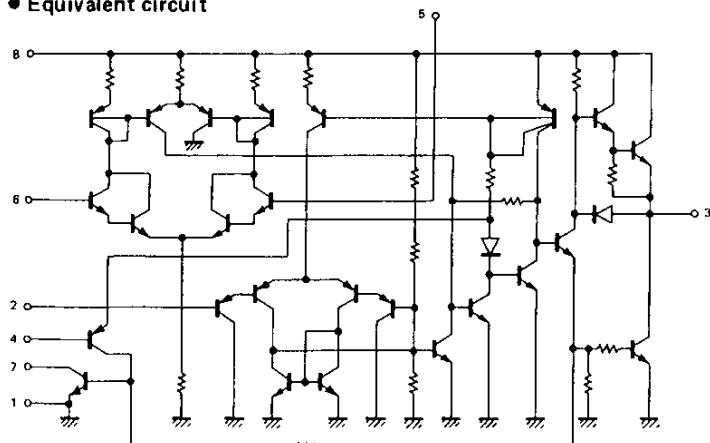

TC5518CPL-20 : Static RAM (Control unit IC20)

- Block diagram

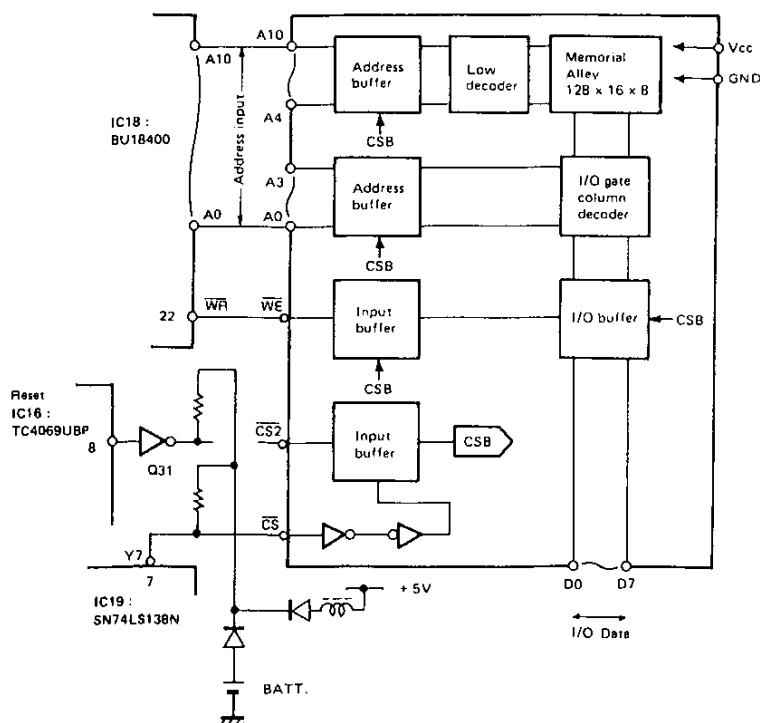

- Terminal function



Terminal name	Function
A0~A10	Address input
D0~D7	Data input/output
CS	Chip select 1
SC2	Chip select 2
WE	Write enable
Vcc	Power supply (+ 5V)
GND	Ground

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

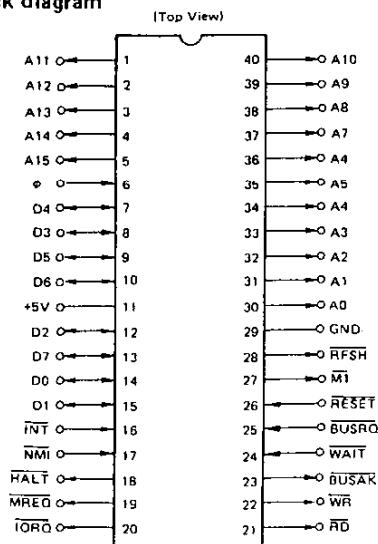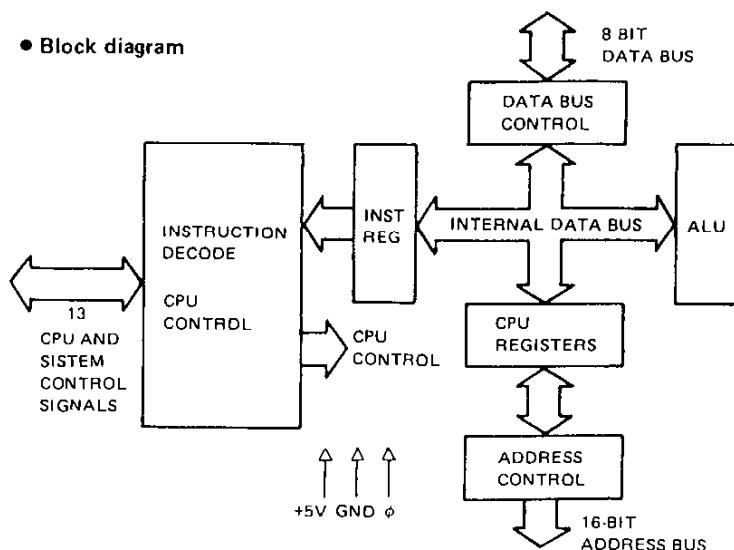
TS-140S/680S**SEMICONDUCTOR DATA****BU18400A : CPU (Control unit IC18)****• Block diagram****• Block diagram****• Terminal function**

Terminal (Signal) name	Input/Output	Terminal (Signal) function
A0 ~ A15 (Address Bus)	3-state output Active "H"	16-bit address bus. Outputs address of memory or I/O device No.. When memory is refreshed, refreshed address is output to seven bits at lower places.
D0 ~ D7 (Data Bus)	3-state Input/output Active "H"	8-bit data bus. Used to transfer data between memory or I/O device and CPU.
M1 (Machine Cycle one)	Output Active "L"	Signal which indicates started machine cycle is OP code fetch cycle.
MREQ (Memory Request)	3-state output Active "L"	Signal which indicates address information necessary for reading and writing memory is output to address bus.
-IORQ (Input/Output Request)	3-state output Active "L"	During M1 cycle This signal request outside devices to add interruption response vector to data bus when maskable interruption is acknowledged. Out of M1 cycle This signal indicates I/O device No. necessary for reading and writing I/O is output to the address bus.
RD (Read)	3-state output Active "L"	Signal which indicates data is being input in data bus. Memory or I/O device sends data to the data bus, synchronizing with this signal
WR (Write)	3-state output Active "L"	Signal which indicates data is being output by data bus. Data to be sent to memory or I/O device is supplied to data bus, synchronizing with this signal.
RFSH (Refresh)	Output Active "L"	Signal which indicates refreshed address for dynamic RAM is output to seven bits at lower places of address during M1 cycle. Dynamic RAM reads refreshed address by using MREQ signal output at the same time as RFSH signal.
HALT (Halt State)	Output Active "L"	Signal which indicates HALT command is executed and CPU is set under HALT condition. When returning from HALT condition, any one of INT, NMI or RESET signals is necessary. CPU continues to refresh memory executing NOP command during HALT.
WAIT (Wait)	Input Active "L"	While this signal is active, CPU continues to wait. If this signal is used, low-speed memory or I/O device can be directly connected to CPU. While CPU is waiting, memory is not refreshed.
INT (Interrupt Request)	Input Active "L"	Input terminal for interruption request signal. If this signal becomes active while interruption is permitted, CPU starts interruption program after finishing command being executed.
NMI (Non Maskable Interrupt)	Input Negative edge trigger	Input terminal for nonmaskable interruption request signal. If this signal becomes active, CPU jumps to address 0066 (16) after finishing command being executed, regardless of permission of interruption. Priority higher than INT signal is given to NMI signal.
RESET (Reset)	Input Active "L"	If this signal becomes active, CPU is reset.
BUSRQ (Bus Request)	Input Active "L"	If this signal becomes active, CPU heighten impedance of address bus (A0 ~ A15), data bus (D0 ~ D7) and 3-state system control terminals (MREQ, IORQ, RD, and WR). Thus, other devices can use above external buses. Priority higher than NMI signal is given to BUSRQ signal.
BUSAK (Bus Acknowledge)	Output Active "L"	Signal which indicates CPU has received BUSRQ signal and heightened impedance of address bus, data bus and 3-state system control terminal.
φ (Clock)	Input	+5V single-phase clock input terminal.


SEMICONDUCTOR DATA

SN74LS138N : Address decoder (Control unit IC19)

- Logic circuit

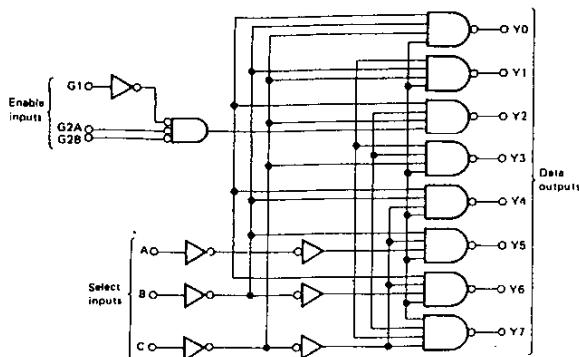

- Block diagram

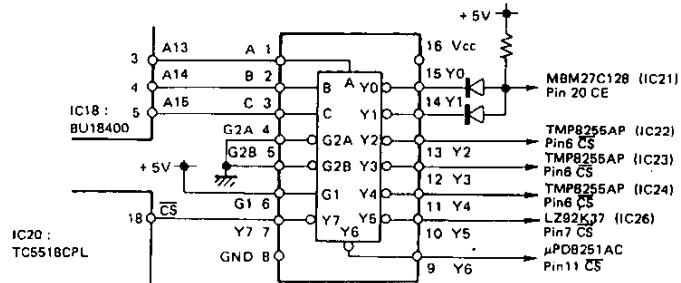

- Truth table

INPUT					OUTPUT							
Enable		Select			Y0	Y1	Y2	Y3	Y4	Y5	Y6	Y7
G1	G2	C	B	A	H	H	H	H	H	H	H	H
X	H	X	X	X	H	H	H	H	H	H	H	H
L	X	X	X	X	H	H	H	H	H	H	H	H
H	L	L	L	L	L	H	H	H	H	H	H	H
H	L	L	L	H	H	L	H	H	H	H	H	H
H	L	L	H	L	H	H	L	H	H	H	H	H
H	L	L	H	H	H	H	H	L	H	H	H	H
H	L	H	L	L	H	H	H	H	L	H	H	H
H	L	H	L	H	H	H	H	H	H	L	H	H
H	L	H	H	L	H	H	H	H	H	H	H	H
H	L	H	H	H	H	H	H	H	H	H	H	H

Note 1 : G2 = G2A + G2B


Note 2 : H : High level

L : Low level

X : Either "H" or "L"

LZ92K37 : Counter (Control unit IC26)

- Terminal connection diagram

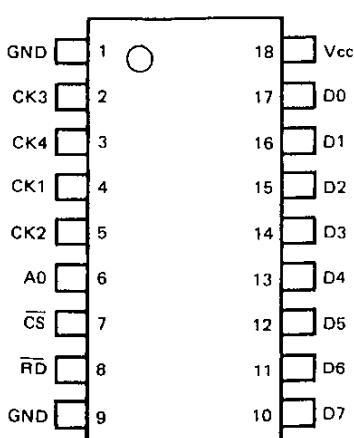

- Terminal function

Pin No.	I/O	Signal name	Pin No.	I/O	Signal name
1	-	GND	10	TO	D7
2	Icu	CK3	11	TO	D6
3	Icu	CK4	12	TO	D5
4	Icu	CK1	13	TO	D4
5	Icu	CK2	14	TD	D3
6	Ic	A0	15	TO	D2
7	Ic	CS	16	TO	D1
8	Ic	RD	17	TO	D0
9	-	GND	18	-	Vcc

Ic : C-MOS level input buffer

Icu : Input buffer with C-MOS level pull-up resistance

TO : Tristate output buffer

- Terminal function


Terminal name	Terminal function
CK1, 2	Rotary encoder pulse input
CK3, 4	Rotary encoder pulse input
A0	Output data selection input, 0 = CK1, 2 1 = CK3, 4
CS	Chip select input
RD	Read enable input
D0 ~ D7	Data bus output

TS-140S/680S

SEMICONDUCTOR DATA

TMP8255AP-5 : I/O Port (Control unit IC22~24)

● Block diagram

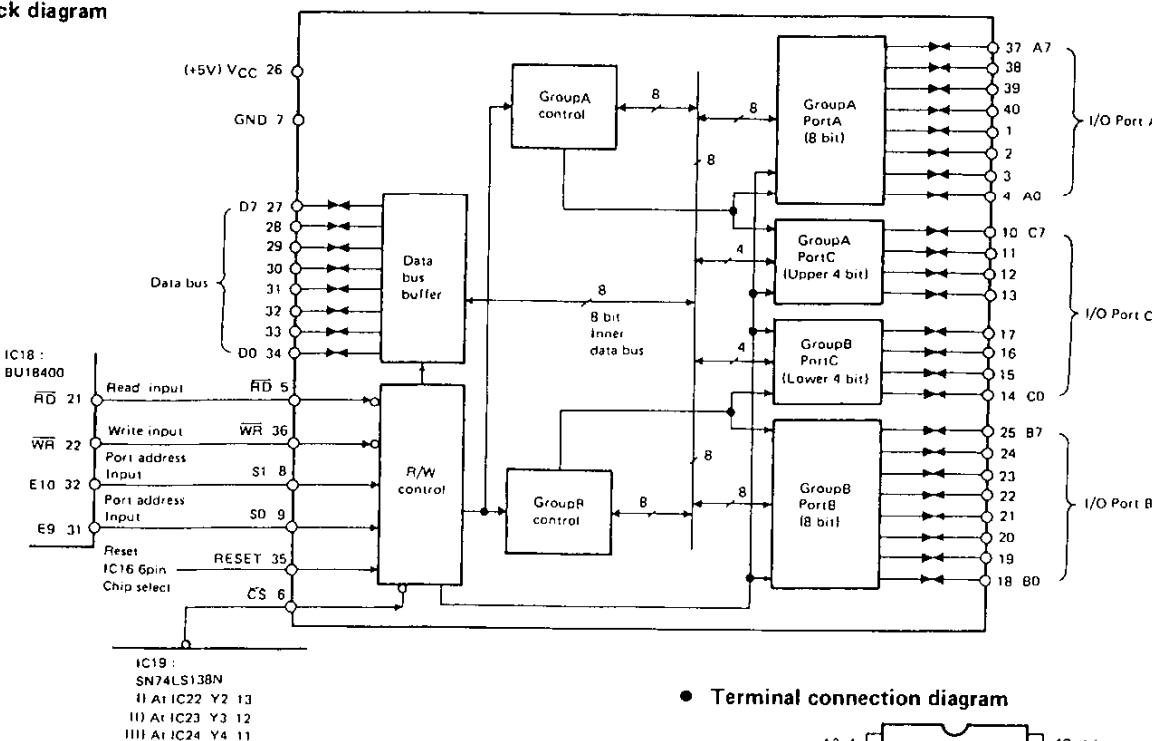


● Basic function


SI	SO	CS	RD	WR	Function
L	L	L	L	H	Data bus ← Port A
L	H	L	L	H	Data bus ← Port B
H	L	L	L	H	Data bus ← Port C
L	L	L	H	L	Port A ← Data bus
L	H	L	H	L	Port B ← Data bus
H	L	L	H	L	Port C ← Data bus
H	H	L	H	L	Control register ← Data bus
—	—	H	—	—	Data bus is in the high-impedance state.
H	H	L	L	H	Prohibit assortment

MBM27C128-25JAJ2 : ROM (Control unit IC21)

● Block diagram

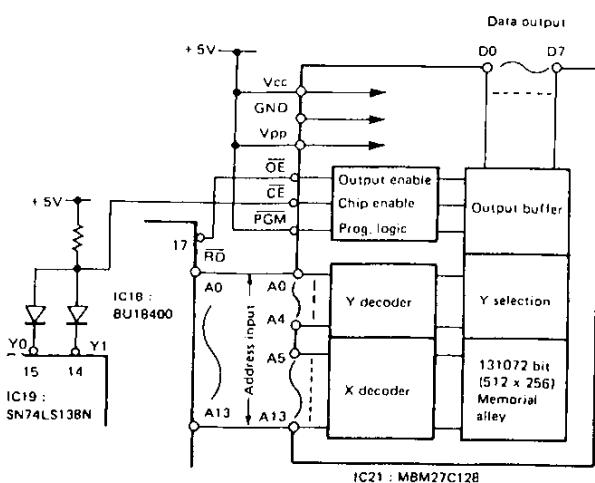

● Terminal connection diagram

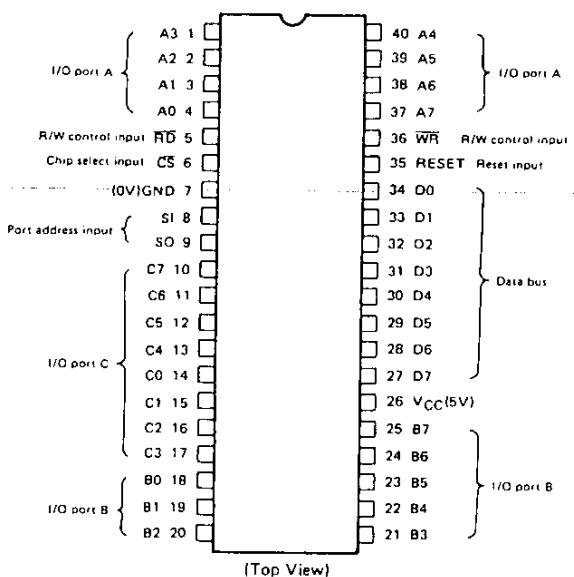


● Terminal function

Terminal name	Function
A0~A13	Address input
D0~D7	Data output
CE	Chip enable input
OE	Output enable input
PGM	Program input
Vcc	Power supply
Vpp	Program power supply
GND	Ground


SEMICONDUCTOR DATA

MB4052 : A/D Converter (Control unit IC27)

• Terminal connection diagram



• Block diagram

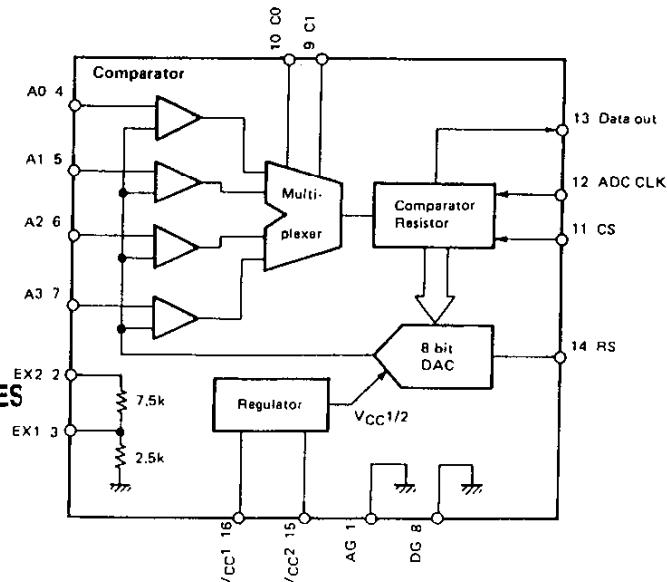

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

• I/O signal pin function

Pin No.	Pin name	Symbol	Function
1	Analog ground	AG	Ground terminal
2	Range expander input	EX2	Analog input pin for expanding the range.
3	Range expander output	EX1	Analog output pin for expanding the range. Connect to any pin from A0 to A3. By using EX1, EX2, the range is expanded to the X 4 range.
4~7	Analog entrance	A0~A3	4-ch analog input pin. Channel 1 is selected by channel select input C0 to C1.
8	Digital ground	DG	Ground terminal
9	Channel select input	C0	The input pin to designate the analog input channel for A/D converter. This signal is latched at the trailing edge of CS.
10		C1	
11	Chip select input	CS	This is the chip select input pin. When CS is inverted from "1" to "0", A/D converting starts and data output is enabled. After A/D converting is over or when an interrupt is required, set the CS back to "1".
12	A/D conversion clock	ADC CLK	This is the clock input pin for A/D conversion input to the comparator register sequentially. Conversion speed is determined by the clock speed. In the case of 8-bit, approx. 10 clocks will be needed. However, it is not necessary that the clock period be fixed.
13	Data output	DATA OUT	This is the open collector to output the result of A/D conversion. The data is output in the order of the start bit, most significant bit, 2nd significant bit, . . . , least significant bit, and the stop bit, synchronized with ADCCLK.
14	Range select input	RS	This is the input pin for selecting the voltage range of analog input. The VFS = V _{CC1} /8 range is selected at "0", and the range of FVS = V _{CC1} /2 is selected at "1". During conversion, hold this pin to "0" or "1".
15	Power supply pin 2	V _{CC2}	When driving with 3.5V to 6.0V of power, connect V _{CC1} and V _{CC2} to each other, and apply the power voltage to them.
16	Power supply pin 1	V _{CC1}	When driving 8 to 18V of power, apply the power voltage to V _{CC2} . At this time, the 5V stabilized voltage is output to V _{CC1} , and approx. 10mA current can be supplied externally to the IC.
			When either 3.5~6.0V or 8~18V power is used, V _{CC1} is the reference voltage for A/D conversion.

• Channel select






C1	C0	Selected Ch.
0	0	A0
0	1	A1
1	0	A2
1	1	A3

• Range select

RS	Conversion voltage range
0	$0 \sim \frac{V_{CC1}}{8}$
1	$0 \sim \frac{V_{CC1}}{2}$

TS-140S/680S**SEMICONDUCTOR DATA** **μ PD6300C : Fluorescent display tube driver (Display unit IC1)****• Terminal function**


Terminal No.	Symbol	Terminal name	I/O	Function
1~7	O13~O19	FIP segment driver	O	High dielectric-strength (40V) output in the Pch open. Corresponds to the output of O13~O19.
8	SO	Serial data output pin	O	Output serial data at the trailing edge of SCK, when the n-number of μ PD6300Cs are connected in series, this can be connected to the SI of the following stage.
9	BT	Blanking pin	I	This input can turn off all indicator or displays, and can dim them by applying a random duty pulse from outside. Active low.
10	LH	Latch pin	I	Transmits the connects of the serial shift register to the buffer register at low level, to latch the connects at the rising time. Active rising (leading) edge.
11	SI	Serial data input pin	I	This is the data input pin. Inputs data to the shift register at the rising edge of SCK.
12	SCK	Serial clock input pin	I	Reads out the SI data to the shift register at the rising edge of SCK. Outputs data from SO at the trailing edge of SCK.
13	CS	Chip select pin	I	When CS is high, this inhibits SCK and LH, and when CS is low, activates SCK and LH.
14	Vss	GND	-	Connect to the GND terminal of the system.
15~27	O0~O12	FIP segment driver	O	Pch open-drain system, high dielectric-strength output. Corresponds to the output of O0~O12.
28	VDD	Power supply pin	-	5V ± 10%

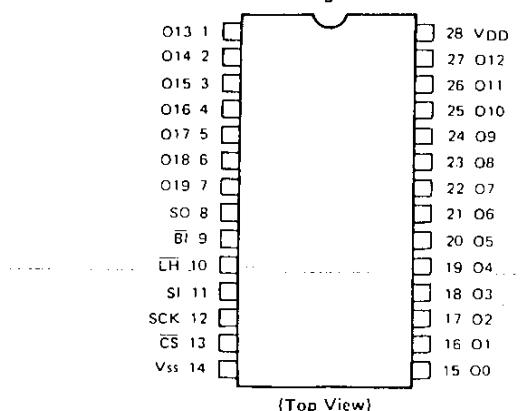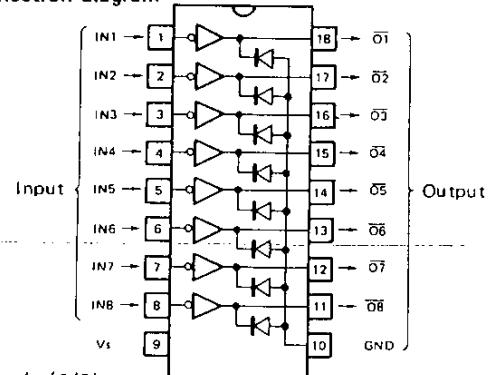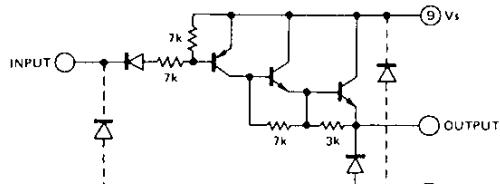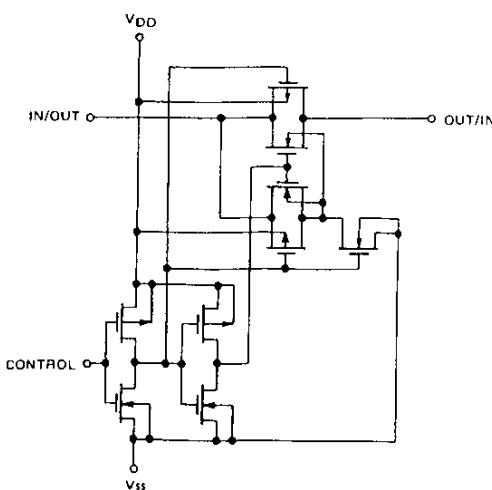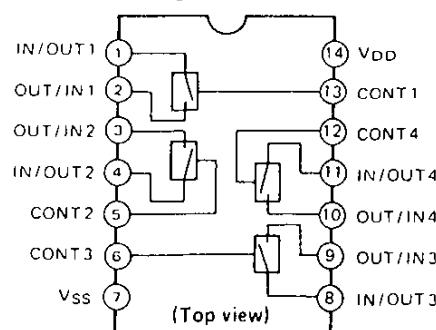• Terminal connection diagram**M54581P : Band data driver (Signal unit IC1)****• Terminal connection diagram****• Equivalent circuit (1/8)****TC4066BP : Switch (Signal unit IC7~10)****• Equivalent circuit (1/4)****• Terminal connection diagram**

SEMICONDUCTOR DATA


μ PD8251AFC (Option IF-10C IC1)

- Block diagram

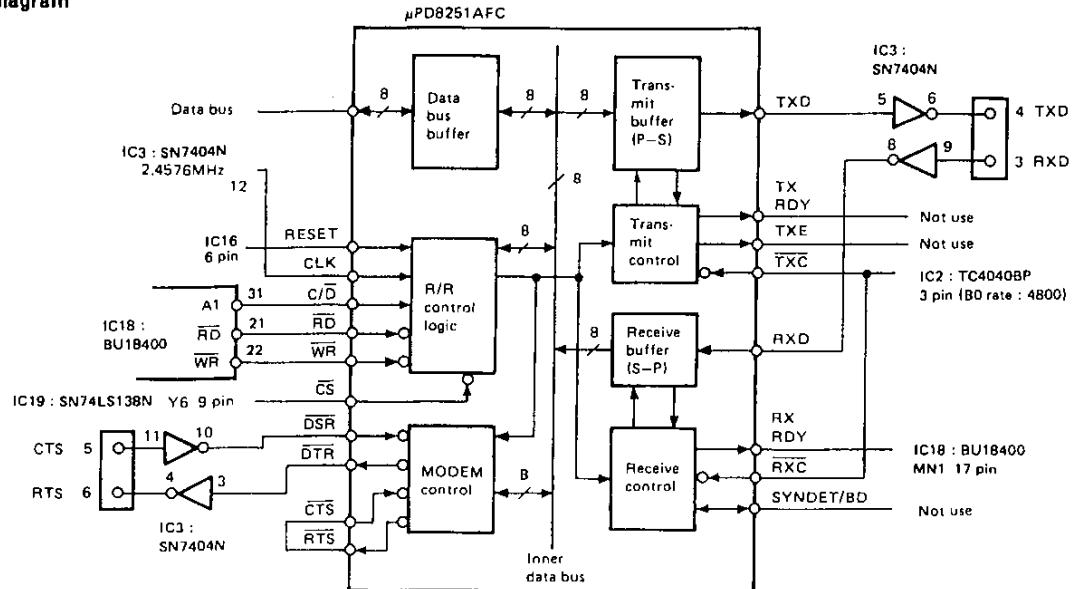


TC4040BP (Option IF-10C IC2)

- Block diagram

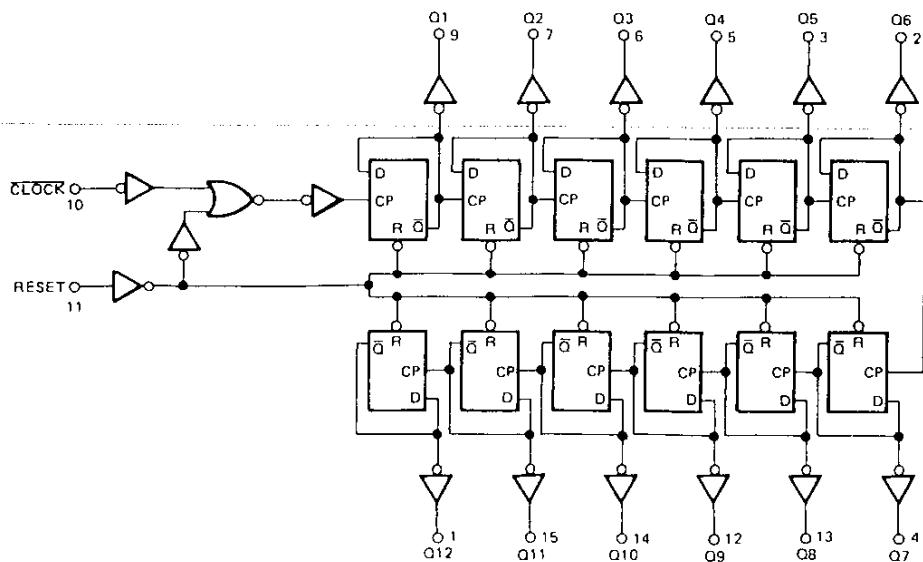

H D7404P (Option IF-10C IC3)

- Block diagram



FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

TS-140S/680S**DESCRIPTION OF COMPONENTS****SWITCH UNIT (X41-3030-XX)**

Component	Use/Function	Operation/Condition/Compatibility
IC1	Microphone amplifier	Processing of audio signals, speech processor.
Q1	Switching transistor	Q1 is ON when PRS is "H".
Q2~4	Switching transistor	Q2~4 are ON when PKS is "L".
Q5	Amplification of control signal	
Q6	Amplifier	For VOX. TS-140S only
D1	Detection of control signal	
D2,3	Switching diode	D2 is ON when RXB is "H". D3 is ON when PKS is "L".

100W FINAL UNIT (X45-3100-XX)

Component	Use/Function	Operation/Condition/Compatibility
Q1	Pre-drive amplifier	Wide-band amplification of HF band.
Q2,3	Drive amplifier	Push-pull wide-band amplification of HF band.
Q4,5	Final amplifier	Push-pull wide-band amplification of HF band.
Q6	Supply of bias for drive	Temperature compensation of drive.
Q7	Supply of bias for final	Temperature compensation of final.
Q8	Constant-voltage power supply	5V for digital system.
Q9	Constant-voltage power supply	5V for PLL system.
D1	Temperature compensation	Temperature sensing of pre-drive.
D2	Temperature compensation	Temperature sensing of drive.
D3	Temperature compensation	Temperature sensing of final.
D4	Absorption of surge voltage	Relay for changing over HF and VHF of drive. TS-680S only
D5	Absorption of surge voltage	For fan motor.
D6	Protection of inverse connection	For power supply terminal.
D7	Constant-voltage power supply	Power supply of 8.2V for temperature sensor module.

FILTER UNIT (X51-3040-XX)

Component	Use/Function	Operation/Condition/Compatibility
Q1	Drive amplifier of 50MHz band	TS-680S only
Q2	Final amplifier of 50MHz band	TS-680S only
Q3	Switching of RAT	Grounds receiving antenna terminal when transmitting.
D1	Absorption of surge voltage of relay	For relay of 500kHz~2.5MHz LPF.
D2	Absorption of surge voltage of relay	For relay of 2.5MHz~4.0MHz LPF.
D3	Absorption of surge voltage of relay	For relay of 4.0MHz~7.5MHz LPF.
D4	Absorption of surge voltage of relay	For relay of 7.5MHz~14.5MHz LPF.
D5	Absorption of surge voltage of relay	For relay of 14.5MHz~21.5MHz LPF.
D6	Absorption of surge voltage of relay	For relay of 21.5MHz~30MHz LPF.
D7	Absorption of surge voltage of relay	For relay of 50MHz~54MHz LPF. TS-680S only
D8	Absorption of surge voltage of relay	For changeover of TX and RX.
D9	Rectification of traveling wave	High-frequency rectification.
D10	Rectification of reflected wave	High-frequency rectification.
D11	Protection from lightning surge	Surge absorber of receiving antenna terminal.

**FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES**
www.mauritron.co.uk
 TEL: 01844 - 351694
 FAX: 01844 - 352554

DESCRIPTION OF COMPONENTS**CONTROL UNIT (X53-3100-XX)**

VCO1-D mode is TS-680S only

Component	Use/Function	Operation/Condition/Compatibility
IC1	PLL3 (BFO PLL)	1,2,7: Frequency division ratio setting input. 3: 91MHz input (VCO3) in AM mode. 10: VCO lock voltage output. 11: UL line, "L" in UL mode. 15: 4.5MHz input (1/8 fSTD).
IC2	Frequency divider (1/20)	4: 91MHz input. 8: 4.55MHz output.
IC3	Frequency divider (1/10)	1: 4.55MHz input. 2: SFT line. Output is OFF when "H" is input. 12: 455kHz output.
IC4	PLL2 (VFO 10Hz step for covering 50kHz)	1,2,7: Frequency division ratio setting input. 3: 55~60MHz input (VCO2). 10: VCO lock voltage output. 11: UL line, "L" in UL mode. 15: 4.5MHz input (1/8 fSTD).
IC5	Frequency divider (1/10)	4: 55~60MHz input. 8: 5.5~6.0MHz output.
IC6	Mixer (MIX5)	1: 10.05~10.55MHz output. 2: 5.5~6.0MHz input. 5: 4.55MHz input.
IC7	Frequency divider (1/10)	1: 10.05~10.55MHz input. 12: 1.005~1.055MHz output.
IC8	Frequency divider (1/8)	8: 4.5MHz output (1/8 fSTD). 14: Input of reference frequency of 36MHz (fSTD).
IC9	Mixer (MIX4)	1: 5.505~5.555MHz output. 2: 1.005~1.055MHz input. 5: 4.5MHz output.
IC10	Mixer (MIX3)	1: 41.505~41.555MHz output. 2: 5.505~5.555MHz input. 5: 36MHz input.
IC11	Mixer (MIX2)	1: Output of 37.005~37.055MHz (in VCO1-A mode) or 77.505~77.555MHz (in VCO1-C,D mode). 2: 41.505~41.555MHz input. 5: Input of 4.5MHz (in VCO1-A mode) or 36MHz (in VCO1-C,D mode).
IC12	Mixer (MIX1)	3: Output of 3.55~13.5MHz (in VCO1-A mode) or 9.05~20.0MHz (in VCO1-B mode) or 15.95~7.5MHz (in VCO1-C mode) or 12.55~16.5MHz (in VCO1-D mode). 5: Input of 40.555~50.555MHz (in VCO1-A mode) or 50.555~61.555MHz (in VCO1-B mode) or 61.555~70.055MHz (in VCO1-C mode) or 90.055~94.055MHz (in VCO1-D mode). 11: Input of 37.005~37.055MHz (in VCO1-A mode) or 41.505~41.555MHz (in VCO1-B mode) or 77.505~77.555MHz (in VCO1-C mode).
IC13	PLL1 (VFO 50kHz step, last VCO) FOR SERVICE MANUALS CONTACT: MAURITRON TECHNICAL SERVICES www.mauritron.co.uk TEL: 01844 - 351694 FAX: 01844 - 352554	1: 4.5MHz input (1/8 fSTD). 5: VCO lock voltage output. 7: UL line, "L" in UL mode. 8: Input of 3.55~13.5MHz (in VCO1-A mode) or 9.05~20.0MHz (in VCO1-B mode) or 15.95~7.5MHz (in VCO1-C mode) or 12.55~16.5MHz (in VCO1-D mode). 9,10,11: Frequency division ratio setting input. 13: Signal for 50kHz output marker.

TS-140S/680S**DESCRIPTION OF COMPONENTS**

Component	Use/Function	Operation/Condition/Compatibility
IC14	PLL4 (HET PLL)	1,2,7: Frequency division ratio setting input. 3: 39.6MHz input (VCO4). 10: VCO lock voltage output. 11: UL line. "L" in UL mode. 15: 4.5MHz input (1/8 fSTD).
IC15	System reset	Generates reset signal when source voltage rises or lowers to make timing of operation and backing up of microprocessor.
IC16	Inverter	1/6, 2/6: Beep tone oscillator. 3/6, 4/6: Shaping of system reset signal wave form. 5/6, 6/6: System clock oscillator (2.45MHz).
IC17	System clock oscillation	Generates interrupt signal for dynamic lighting of indicator lamp.
IC18	CPU	8-bit microprocessor, Z80 (See CIRCUIT DESCRIPTION).
IC19	Address decoder	Divides address signal of CPU and converts chip select signal of each IC and divides memory area of 64kbytes into 8kbytes x 8blocks.
IC20	Static RAM	Makes data such as VFO, memory, etc. for microprocessor. Area capacity: 2kbytes x 8bits. Backed up by system reset signal.
IC21	ROM	Control program (including program for outside control) is built in. Area capacity: 16kbytes x 8bits.
IC22,23	I/O port	Bus interface I/O port. All are set by output ports. (See I/O PORT FUNCTIONS.)
IC24	I/O port	Bus interface I/O port. All are set by input ports. (See I/O PORT FUNCTIONS.)
IC25	Inverter	Absorbs chattering of encoder.
IC26	Counter	Counts pulses of encoder. Two system of quadruplication (CK1,2) and duplication (CK3,4).
IC27	A/D converter	Converts analog voltage input to digital data and output it. 4: RIT. 5: IF shift. 6: Carrier point (LSB) compensation. 7: Carrier point (USB) compensation.
Q1	VCO3 (PLL3)	90.7~91.3MHz.
Q2	VCO3 buffer	
Q3,4	BFO buffer	453.5~456.5kHz.
Q5	VCO2 (PLL2)	55.0~60.0MHz.
Q6	VCO2 buffer	
Q7	MIX5 output amplifier	10.05~10.55MHz.
Q8	TTL input buffer	
Q9	Reference crystal oscillation (OSC)	36MHz (fSTD).
Q10	OSC buffer	
Q11	TTL input buffer	
Q12	MIX3 input buffer	36MHz
Q13	MIX1 input buffer	37.005~37.055MHz (VCO1-A mode) or 41.505~41.555MHz (VCO1-B mode) or 77.505~77.555MHz (VCO1-C,D mode).
Q14	VCO1 buffer	40.555~70.055MHz or 90.055~94.055MHz.
Q15	PLL IF signal amplification	2.5~22.5MHz.
Q16~18	PLL1 low-pass filter	Active (Reference frequency: 50kHz).
Q19~21	PLL4 low-pass filter	Active (Reference frequency: 5kHz or 25kHz).
Q22	VCO4 (PLL4)	39.6MHz.
Q23	VCO4 buffer	
Q24	HET buffer	
Q25,26	Shaping of UL signal wave form	Output is "L" in UL mode.

FOR SERVICE MANUALS**CONTACT:****MAURITRON TECHNICAL SERVICES**www.mauritron.co.uk**TEL: 01844 - 351694****FAX: 01844 - 352554**

TS-140S/680S**DESCRIPTION OF COMPONENTS**

Component	Use/Function	Operation/Condition/Compatibility
Q27	BPF (PLL) buffer	MIX1 input of 37.005~37.055MHz in VCO1-A mode.
Q28	BPF (PLL) buffer	MIX1 input of 41.505~41.555MHz in VCO1-B mode.
Q29	BPF (PLL) buffer	MIX1 input of 77.505~77.555MHz in VCO1-C,D mode.
Q30	Outside interrupt control	Transfers to program for outside control of personal computer.
Q31	RAM backup control	Transfers to backup mode of RAM when power is OFF.
Q32	BPF (PLL) buffer	Active is "H" in VCO1-C,D mode.
Q33	BPF (PLL) buffer and VCO1-B buffer	Active is "H" in VCO1-B mode.
Q34	BPF (PLL) buffer and VCO1-A buffer	Active is "H" in VCO1-A mode.
Q35	TONE UNIT signal buffer	Active is "H" in FM transmission mode of split memory CH.
Q36	SSB mode signal buffer	Active is "H" in SSB mode.
Q37	CW mode signal buffer	Active is "H" in CW mode (including CWN mode).
Q38	AM mode signal buffer	Active is "H" in AM mode.
Q39	FM mode signal buffer	Active is "H" in FM mode.
Q40	CWN mode signal buffer	Active is "H" in CWN mode.
O41	MSCR LED driver	Drives LED when memory is scrolling.
Q42	F,LOCK LED driver	Drives LED in F,LOCK mode.
Q43	1MHz LED driver	Drives LED in 1MHz mode.
D1	VCO3 varicap	Frequency variable.
D2,3	VCO2 varicap	Frequency variable.
D4,5	BPF changeover switch	ON in VCO1-B mode.
D6	BPF changeover switch	ON in VCO1-A,C,D mode.
D7,8	Wired OR	"H" in VCO1-A,C,D mode.
D9,10	LPF changeover switch	ON in VCO1-C,D mode.
D11	LPF changeover switch	ON in VCO1-A mode.
D12,13	BPF changeover switch	ON in VCO1-C,D mode.
D14,15	BPF changeover switch	On in VCO1-A mode.
D16	Wired OR	Composition of PLL1, UL signal.
D17	VCO4 varicap	Frequency variable.
D18	Beep switch	Beep oscillator is turned ON/OFF by beep pulse. Active is "H".
D19,20	Composition of ROM chip select	Makes 2 blocks of select signal of 8kbytes and use them as ROM select signal of 16kbytes.
D21,23,24	Power supply changeover switch	Changes power supply in RAM backup mode.
D22	Stabilization of voltage	For Lithium battery.
D25~27	Prevention of reverse current	
D29,31	Extended function switch	

FOR SERVICE MANUALS
CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

TS-140S/680S**DESCRIPTION OF COMPONENTS****DISPLAY UNIT (X54-3050-XX)**

Component	Use/Function	Operation/Condition/Compatibility
IC1	Serial input-type high-voltage fluorescent indicator lamp	Converts serial indication data from CONTROL UNIT in parallel and turns on fluorescent indicator lamp.
Q1	Fluorescent indicator lamp driver	
D1	Switching	F.LOCK
D2	Switching	M ► V
D3	Switching	M.IN
D4	Switching	DOWN
D5	Switching	VFO/M
D6	Switching	SCAN
D7	Switching	CLEAR
D8	Switching	UP
D9	Switching	USB/LSB
D10	Switching	CW (N/W)
D11	Switching	FM/AM
D12	Switching	1MHz
D13	Switching	A/B
D14	Switching	SPLIT
D15	Switching	A=B
D16	Switching	RIT
D17	Generation of filament bias voltage	Generates bias for filament of fluorescent indicator lamp.
D18	Indication	Turns on red lamp in transmission mode.
D19	Indication	Turns on yellow lamp when M.SCR is ON.
D20	Indication	Turns on green lamp when F.LOCK is ON.
D21	Indication	Turns on green lamp when 1MHz is ON.

SIGNAL UNIT (X57-3190-00: TS-680S) (X57-3200-XX: TS-140S)

Component	Use/Function	Operation/Condition/Compatibility
IC1	Band data driver	13.8V output.
IC2	Decoding of band data	Open collector. Active is "L".
IC3	RX: Product detection, TX: BM	455 kHz → AF
IC4	Audio power amplifier	
IC5	TX 1st mixer	455 kHz → 40.055 MHz
IC6	FM IF amplifier, detection, squelch	
IC7 (1/4)	DC switch	Turned ON in TX mode.
IC7 (2/4)	AF signal switch	Turned ON in SSB and CW mode.
IC7 (3/4)	AF signal switch	Turned ON in FM mode.
IC7 (4/4)	AF signal switch	Turned ON in AM mode.
IC8 (1/4)	AGC time constant switch	Turned ON in AM mode.
IC8 (2/4)	AGC time constant switch	Turned ON in AGC and SLOW mode.
IC8 (3/4)	Changeover switch of meter	Turned ON in TX/ALC mode.
IC8 (4/4)	Changeover switch of meter	Turned ON in TX/PWR mode.
IC9 (1/4)	S-meter sensitivity switch	Turned ON in 50MHz band mode.
IC9 (2/4)	S-meter sensitivity switch	Turned ON in HF mode.
IC9 (3/4)	Changeover switch of meter	Turned ON in RX mode.
IC9 (4/4)	S-meter sensitivity switch	Turned ON in FM mode.
IC10 (1/4)	ALC level switch	Turned ON in AM and CW mode.
IC10 (2/4)	ALC level switch	Turned ON in SSB mode.
IC10 (3/4)	ALC level switch	Turned ON in power-down mode.
IC10 (4/4)	ALC level switch	Turned ON in mode other than power-down mode.
IC11 (1/4)	ALC amplifier	
IC11 (2/4)	Reflected wave voltage amplifier	
IC11 (3/4)	Detected output amplifier	Amplifies voltage of traveling wave and reflected wave.
IC11 (4/4)	Power meter amplifier	
IC12	8V AVR	

**FOR SERVICE MANUALS
CONTACT:**

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

DESCRIPTION OF COMPONENTS

Component	Use/Function	Operation/Condition/Compatibility
Q1	13.8V line switching	Turned ON in 2MHz band mode.
Q2	13.8V line switching	Turned ON in 50MHz band mode. TS-680S only
Q3,4	Switching	Turned "L" in 50MHz band mode. TS-680S only
Q5	8V line switching	Turned ON in 50~54MHz mode. TS-680S only
Q6	8V line switching	Turned ON in 21.5~30.0MHz mode.
Q7	8V line switching	Turned ON in 10.5~21.5MHz mode.
Q8	8V line switching	Turned ON in 0.5~10.5MHz mode.
Q9~11	VCO	Q9: 0.5~10.5MHz Q10: 10.5~21.5MHz Q11: 21.5~30.0MHz
Q12	VCO	50.0~54.0MHz. TS-680S only
Q13,14	VCO output buffer	
Q15	VCO output amplifier	
Q16,17	Switching	Reduces noise when RF AMP and ATT are turned ON/OFF.
Q18,19	RX 1st mixer	Receiving frequency → 40.055MHz.
20	13.8V line switching	Turned ON in RX mode.
Q21	Post amplifier	40.055MHz.
Q22,23	RX 2nd mixer	40.055MHz → 455kHz.
Q27	IF amplifier	455kHz.
Q28,29	Switching	Shunt IF circuit when NB pulse is generated.
Q30,31	IF amplifier	455kHz.
Q32,34	8V line switching	Turned ON in CW mode (excluding CWN).
Q35~39	8V line switching	Q35: SSB Q36: AM Q37: FM Q38: CW Q39: CWN
Q40,41	Switching	Shunt of TX circuit in RX mode.
Q42	Switching	Shunt of RX circuit in TX mode.
Q43	8V line switching	Generates RB.
Q44	8V line switching	Generates AMT and SST.
Q45~47	NB amplifier	455kHz.
Q48	NB buffer	
Q49	NB AGC amplifier	
Q50	Switching	Set to "L" when NB pulse is generated in NB2.
Q51	Switching	Set to "L" when NB pulse is generated in NB1.
Q52	Switching	Set to "L" when SKB pulse is generated.
Q53	IF buffer	AGC, AM.
Q54	AF buffer	AM.
Q55	Switching	Set to "L" in TX mode.
Q56	AF amplifier	
Q57	Switching	Set to "L" in MUT and TX mode.
Q58	AF amplifier	FM.
Q59	AGC amplifier	
Q60	Generation of S-meter voltage.	
Q61	S-meter amplifier	
Q62	Switching	Prevents S-meter from over-reading when power is turned ON.
Q63	Switching	Generates HF voltage. TS-680S only
Q64	Switching	Generates 50MHz band voltage. TS-680S only
Q65,66	Switching	Sets AGC time constant in mode other than FM mode.
Q67	Switching	Invalidates changeover of FAST/SLOW of AGC in FM mode.
Q68	Generation of ALC meter voltage	
Q69	ALC meter amplifier	
Q70	RF amplifier	28MHz band. TS-680S only
Q71	Buffer	28MHz band. TS-680S only
Q72	RF amplifier	50MHz band. TS-680S only
Q73	Buffer	50MHz band. TS-680S only

TS-140S/680S**DESCRIPTION OF COMPONENTS**

Component	Use/Function	Operation/Condition/Compatibility
Q74	TX AF amplifier	
Q75	Switching	Shunt of FMM in RX mode.
Q76	8V line switching	Turned ON in TOC (Tone transmission) mode.
Q77	Switching	Generates RXB. Set to "L" in TX mode.
Q78	HET amplifier	39.6MHz.
Q79,80	TX 2nd mixer	40.055MHz (39.6MHz in FM mode) → Transmission frequency.
Q81	RF amplifier	
Q82	8V line switching	Turned ON in FM/TX mode.
Q83,85	13.8V line switching	Turned ON in 50MHz band. TS-680S only
Q84	Switching	Connects KEY line in CW mode.
Q86	TX IF amplifier	455kHz.
Q87	8V line switching	Turned ON in TX mode. Generates KEYING timing.
Q88	8V line switching	Turned ON in FM, CW and TX mode.
Q89	AF amplifier	Output to RX packet terminal.
Q90,91	Switching	Generates SS and CSS.
Q92	Switching	Set to "L" in power-down mode.
Q93	Switching	Set to "L" in mode other than power-down mode.
Q94	Switching	Set to "L" in HF mode. TS-680S only
Q95	Switching	Set to "L" in 50MHz mode. TS-680S only
Q96	Switching	Set to "L" in SS8 and FM mode.
Q97	Switching	Generates squelch signal for packet.
Q98	Switching	Generates NFT.
Q99	Switching	Connects SEM line in CW mode.
D1~3	Switching	Changeover of BPF.
D5,6,9,10	Protection from lightning surge.	
D7,8,11~20	Switching	Changeover of BPF.
D21,22	Switching	Changeover of BPF. TS-680S only
D23	Absorption of surge voltage of relay	For attenuator relay.
D24	Prevention of reverse current	Information on 28F 28MHz band and 50F 50MHz band. TS-680S only
D25	Absorption of surge voltage of relay	For RF AMP changeover relay. TS-680S only
D26~29	Prevention of reverse current	Decodes band information.
D30	Voltage shift	
D31	Prevention of reverse current	Decodes band information. TS-680S only
D33	Prevention of reverse current	
D34,35	Change of VCO frequency	0.5~10.5MHz.
D36,37	Change of VCO frequency	10.5~21.5MHz.
D38	VCO switching	For 10.5~21.5MHz.
D39,40	Change of VCO frequency	21.5~30.0MHz.
D41	VCO switching	For 21.5~30.0MHz.
D42,43	Change of VCO frequency	50.0~54.0MHz. TS-680S only
D44	VCO switching	For 50.0~54.0MHz. TS-680S only
D45	Switching	For TX mixer of VCO output.
D46	Switching	For RX mixer of VCO output.
D47	Attenuator	For CAR level.
D48	Prevention of reverse current	RXB+SSB.
D49	Prevention of reverse current	
D50,53	Switching	Receiving 1st IF MCF circuit.
D51,52	Switching	Transmission 2nd IF MCF circuit.
D54	Switching	Receiving 2nd IF circuit.
D55	Switching	Transmission 1st IF circuit.
D56,57,60~63	Switching	Selects 455kHz filter.
D58,59	Prevention of reverse current	SSB+CW wide.
D64	Switching	Transmission 1st IF circuit.

FOR SERVICE MANUALS**CONTACT:****MAURITRON TECHNICAL SERVICES**www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

TS-140S/680S**DESCRIPTION OF COMPONENTS**

Component	Use/Function	Operation/Condition/Compatibility
D65	Switching	Receiving 2nd IF circuit.
D66	Switching	RB line.
D67	Switching	SS line.
D68	Prevention of reverse current	SSB+AMB.
D69	Prevention of reverse current	SSB+CWB.
D70	Prevention of reverse current	MUT+RB.
D71	Noise detection	FM squelch circuit.
D72	Switching	FM 2nd IF circuit.
D73,74	AGC detection	
D75	AM detection	
D76	Prevention of reverse current	TXB.
D77	Prevention of reverse current	FMB+CWB.
D78	Temperature compensation	S-meter circuit.
D79	Prevention of reverse current	50W+PPD.
D80	Prevention of reverse current	PD+FMB.
D81	Prevention of reverse current	AMB+CWB.
D82	Prevention of reverse current	VSF.
D83	Prevention of reverse current	ALC.
D85	Prevention of reverse current	Protection.
D86	Noise detection	NB1.
D87	Noise detection	NB2.
D88	Voltage shift	S8K.
D89	Prevention of reverse current	CWB+FMB.
D90	Absorption of surge voltage of relay	For remote control relay.
D91,92	Voltage shift	Outside ALC.
D93	Voltage shift	For DELAY TIME module VCC.
D95	Prevention of reverse current	
D96	Switching	HET amplifier input.
D97,98	Prevention of reverse current	RXB+NFT+ALC.
D99	Switching	Receiving HET output.
D100	Switching	Transmission HET output.
D101,102	Switching	FM transmission IF output.
D103~106	Switching	Changeover of transmission BPF.
D107	Prevention of reverse current	RXB+NFT.
D108	Prevention of reverse current	CWB.
D109,110	Switching	CAR TIF input circuit.
D111	Temperature compensation	TIF amplifier.
D112	Prevention of reverse current	RB.
D113	Prevention of reverse current	Power supply circuit for keying.
D114	Prevention of reverse current	KEY.
D115	Prevention of reverse current	PC1.
D116	Stabilization of voltage	For ALC amplifier.
D117	Prevention of reverse current	Unbalancing circuit of AM carrier.
D118	VCO switching	For 0.5~105 MHz.
D119	Prevention of reverse current	SSB+FMB.
D120	Prevention of reverse current	For ICB VCC.
D122	Switching	CAR TIF input circuit.
D123	Prevention of reverse current	CWB.
D124	Switching	FM transmission IF output.
D125	Voltage shift	Protection circuit.
D126	Switching	Transmission output in mode other than FM mode.
D501	Isolator	CWB.
D502	Isolator	VOX line.
D503	Voltage shift	VOX line.

TS-140S/680S**DESCRIPTION OF COMPONENTS****SIDE TONE UNIT (X59-1060-00)**

Component	Use/Function	Operation/Condition/Compatibility
Q1	SIDE TONE oscillation	800Hz.
D1	Switching	Turned ON when KEY DOWN.
D2	Prevention of reverse current	
D3	Temperature compensation	

VOX UNIT (X59-1080-00)

Component	Use/Function	Operation/Condition/Compatibility
IC1 (1/2)	Comparison of VOX level	
IC1 (2/2)	Comparison of ANTI VOX level	
IC2	NOR circuit (RS flip-flop)	
Q1	Switching transistor	Q1 is ON when IC2/11pin is "H"
D1,2	Prevention of reverse current	

FM MIC AMP UNIT (X59-3000-02)

Component	Use/Function	Operation/Condition/Compatibility
IC1 (1/2)	Low-pass filter	1,2: Output
IC1 (2/2)	Limitting amplifier	6: Input 7: Output
Q1	SUB TONE	

TRX UNIT (X59-3340-00)

Component	Use/Function	Operation/Condition/Compatibility
Q1~5	Switching transistor	Q3,5 are ON in receiving mode, and Q1,2,4 are ON in transmission mode.
D1,2	Switching	

NB2 UNIT (X59-3350-00)

Component	Use/Function	Operation/Condition/Compatibility
IC1	One-shot multi vibrator	Synchronized to pulse, with width of 1/4,4/4: 5mS and 2/4,3/4: 40mS.
Q1	Switching transistor	Turned ON when pulse is 15mS
Q2	Switching transistor	Turned OFF when pulse is 40mS.

DELAY TIME UNIT (X59-3360-00)

Component	Use/Function	Operation/Condition/Compatibility
IC1	One-shot multi vibrator	
O1,2,6	Switching transistor	Turned ON when CW KEY DOWN.
Q3~5,7	Switching transistor	Turned OFF when CW KEY DOWN.
D1	Prevention of reverse current	

FAN UNIT (X59-3370-00)


Component	Use/Function	Operation/Condition/Compatibility
IC1	Temperature detection	1/2: Power down 2/2: Fan motor operation
Q1	Switching transistor	

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
 TEL: 01844 - 351694
 FAX: 01844 - 352554

PARTS LIST

CAPACITORS CC 45 TH 1H 220 J
 1 2 3 4 5 6

1 = Type ceramic, electrolytic, etc.
 2 = Shape round, square, etc.
 3 = Temp. coefficient
 4 = Voltage rating
 5 = Value
 6 = Tolerance



• Capacitor value

1 0 3 = 0.01μF

2 2 0 = 22pF

1st number | Multiplier
2nd number

0 1 0 = 1pF
1 0 0 = 10pF
1 0 1 = 100pF

1 0 2 = 1000pF = 0.001μF

• Temperature Coefficient

1st Word	C	L	P	R	S	T	U
Color*	Black	Red	Orange	Yellow	Green	Blue	Violet
ppm/°C	0	-80	-150	-220	-330	-470	-750

2nd Word	G	H	J	K	L
ppm/°C	± 30	± 60	± 120	± 250	± 500

Example CC45TH = -470 ± 60 ppm/°C

• Tolerance

Code	C	D	G	J	K	M	X	Z	P	No code
(%)	± 0.25	± 0.5	± 2	± 5	± 10	± 20	+ 40	+ 80	+ 100	More than 10μF ~ 10 ~ + 50 Less than 4.7μF ~ 10 ~ + 75

Code	B	C	D	F	G
(pF)	± 0.1	± 0.25	± 0.5	± 1	± 2

Less than 10 pF

• Rating voltage

2nd word	A	B	C	D	E	F	G	H	J	K	V
1st word											
0	1.0	1.25	1.6	2.0	2.5	3.15	4.0	5.0	6.3	8.0	—
1	10	12.5	16	20	25	31.5	40	50	63	80	35
2	100	125	160	200	250	315	400	500	630	800	—
3	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	—

Dimension


Dimension code	L	W	T
Empty	5.6 ± 0.5	5.0 ± 0.5	Less than 2.0
E	3.2 ± 0.2	1.6 ± 0.2	Less than 1.25
F	2.0 ± 0.3	1.25 ± 0.2	Less than 1.25

Dimension


Dimension code	L	W	T	Wattage
E	3.2 ± 0.2	1.6 ± 0.2	0.57	2B
F	2.0 ± 0.3	1.25 ± 0.2	0.45	2A

Rating wattage

Cord	Wattage	Cord	Wattage	Cord	Wattage
2A	1/10W	2E	1/4W	3A	1W
2B	1/8W	2H	1/2W	3D	2W
2C	1/6W				



• Chip capacitors

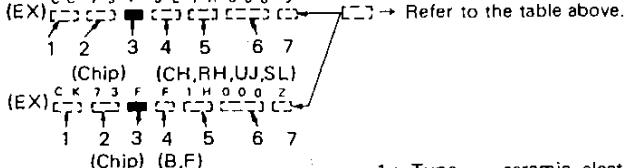

1 = Type ceramic, electrolytic, etc.
 2 = Shape round, square, etc.
 3 = Dimension
 4 = Temp. coefficient
 5 = Voltage rating
 6 = Value
 7 = Tolerance.

RESISTORS

• Chip resistor (Carbon)



• Carbon resistor (Normal type)



• Carbon resistor (Normal type)

TS-140S/680S**PARTS LIST**

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

FOR SERVICE MANUALS
CONTACT:**MAURITRON TECHNICAL SERVICES**

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
TS-140S/680S						
1	1B	*	A01-1032-02	CASE (UPPER)		
2	3B	*	A01-1033-02	CASE (LOWER)		
3	2F	*	A10-1286-01	CHASSIS		
4	3C	*	A11-0404-01	SUB CHASSIS		
5	2G	*	A20-2622-03	PANEL ASSY	B	
5	2G	*	A20-2638-03	PANEL ASSY	A	
6	1H	*	A22-0753-02	SUB PANEL		
7	2F	*	A23-1498-13	REAR PANEL		
8	1H	*	A33-0408-04	REFLECTOR		
13	2H	*	B01-0660-03	PANEL ESCUTCHEON ASSY		
14	2G	*	B10-1101-03	FRONT GLASS	B	
14	2G	*	B10-1102-03	FRONT GLASS	A	
15	2H	*	B11-0447-04	OPTICAL FIBER ASSY		
17	2H	*	B11-0450-04	FILTER		
18	1J	*	B30-0817-15	PILOT LAMP (14V, 80mA)		
19	1H	*	B31-0661-05	METER		
22	1K	*	B46-0410-20	WARRANTY CARD	K	
23	1K	*	B50-8199-20	INSTRUCTION MANUAL		
		*	B01-0659-03	ESCUCHENON		
		*	B40-3702-04	MODEL NAME PLATE	MTW	
		*	B40-3799-04	MODEL NAME PLATE		
		*	B40-3839-04	MODEL NAME PLATE	K	
01			CK45F1H103Z	CERAMIC 0.010UF 2		
30	2D		E04-0167-05	RF COAXIAL CABLE RECEPTACLE		
31	1J		E07-0751-05	7P DIN PLUG (AFCY)		
32	1J		E30-2065-05	DC POWER CARD ASSY (AFCY)		
33	1J		E31-2154-05	CONNECTING WIRE (AFCY)		
34	1J		E07-1351-05	13P PLUG (AFCY)		
			E07-0852-15	8P METAL PLUG (MIC)	KM	
			E31-3297-05	FLEXIBLE CABLE		
			E31-3298-05	FLEXIBLE CABLE		
			E31-3299-05	FLEXIBLE CABLE		
			E31-3300-05	FLEXIBLE CABLE		
35	1J		E05-2036-05	FUSE (20A)		
40	1C	*	F11-1069-02	SHIELDING COVER		
41	1F	*	F11-1089-04	SHIELDING COVER (SIGNAL UNIT)		
		*	F11-0818-24	SHIELDING COVER		
		*	F19-0657-04	BLIND PLATE (REAR PANEL)	R	
			F20-0521-04	INSULATING SHEET (LITHIUM BATT)		
47	2G	*	G02-0505-05	KNOB FIXED SPRING		
48	1F, 1J	*	G02-0578-04	LEAF SPRING		
49	3C		G10-0610-04	FELT		
50	1A, 2H	*	G10-0656-04	FELT (SP)		
51	2H	*	G10-0660-04	FELT (PANEL)		
52	2E	*	G10-0668-04	FELT (SIGNAL UNIT)		
53	2E	*	G10-0633-04	FELT (CHASSIS SIDE)		
54	1A		G13-0684-04	CUSHION (SUB CHASSIS)		
55	2G		G13-0831-04	CUSHION (SIGNAL UNIT)		
56	2G	*	G13-0848-04	CUSHION (KNOB)		
57	2G, 2H	*	G13-0849-04	CUSHION (KNOB)		
58	2H	*	G13-0050-04	CUSHION (KNOB)		

E: Scandinavia & Europe K: USA P: Canada

A : TS-140S (K,M,T,W)

B : TS-680S (K)

U: PX(Far East, Hawaii) T: England M: Other Areas

UE : AAFES(Europe) X: Australia

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕 向	Re- marks 備考
59	2H	*	G13-0863-04	CUSHION (SCUTCHER)		
60	1I	*	G13-0864-04	CUSHION (REFLECTOR)		
62	1A, 1B		G53-0509-04	PACKING (CASE SIDE)		
			G02-0565-04	FLAT SPRING		
			G11-0609-04	CUSHION (MIC)	KM	
			G13-0656-04	CUSHION (FLEXIBLE CABLE)		
			G13-0855-04	CUSHION (MIC)		
		*	G13-0885-04	CUSHION (FLEXIBLE CABLE)	W	
		*	G13-0891-04	CUSHION		
66	3K	*	H01-8146-04	CARTON BOX		
66	3K	*	H01-8165-04	CARTON BOX		A
68	2J	*	H10-2633-02	PACKING FIXTURE(FRONT)		B
69	2K	*	H10-2634-02	PACKING FIXTURE(REA)		
70	2J		H12-1315-04	CUSHION		
71	2J	*	H12-1405-04	CUSHION (FRONT)		
72	2K		H20-1410-03	PROTECTIVE COVER		
73	1J		H25-0112-04	PROTECTIVE BAG (DC CARD)		
74	1J		H25-0079-04	PROTECTIVE BAG (MIC)	KM	
77	3A		J02-0323-05	FOOT (REAR)		
78	3A		J02-0440-04	ASSISTANT FOOT		
79	1A, 3A		J02-0441-05	FOOT (SMALL TYPE)		
80	3A, 3B		J02-0442-04	FOOT (FOOT)		
82	11, 2I		J21-2664-14	MOUNTING HARDWARE(SW)		
83	3A		J21-4208-04	MOUNTING HARDWARE(ASST FOOT)		
84	1H		J31-0141-04	SPACER RING (MIC)		
85	1H		J32-0792-04	HEX BOS		
86	2F		J42-0442-05	HOLE BUSHING		
87	2A	*	J50-0401-05	HINGE		
88	3C	*	J50-0402-05	HINGE		
			J13-0404-05	FUSE HOLDER(DC POWER CARD ASSY)		
			J61-0307-05	WIRE BAND		
92	1B		K01-0407-05	CARRYING HANDLE		
93	2G		K21-0778-02	MAIN KNOB		
94	2G		K23-0710-04	KNOB (INSIDE)		
95	2G		K29-0741-34	KNOB (OUTSIDE)		
96	1H		K29-0758-14	PUSH KNOB (POWER SW)		
97	2G	*	K29-3078-04	KNOB (CW SW)		
98	2G	*	K29-3079-04	KNOB (PWR, MIC, REGIN, NB LEVEL)		
99	2G	*	K29-3080-14	KNOB (M. CH)		
100	2G	*	K29-3081-04	KNOB (A/B)		
101	2G	*	K29-3082-04	KNOB (SPLIT)		
102	2G	*	K29-3083-04	KNOB (A=B)		
103	2G	*	K29-3084-04	KNOB (LSB/USB)		
104	2G	*	K29-3085-04	KNOB (CW/N)		
105	2G	*	K29-3086-04	KNOB (AM/FM)		
106	2G	*	K29-3087-04	KNOB (CLEAR)		
107	2G	*	K29-3088-04	KNOB (SCAN)		
108	2G	*	K29-3089-04	KNOB (VFO/M)		
109	2G	*	K29-3090-04	KNOB (F. LOCK)		
110	2G	*	K29-3091-04	KNOB (M-V)		
111	2G	*	K29-3092-04	KNOB (M. IN)		
112	2G	*	K29-3093-04	KNOB (BAND)		
113	2H	*	K29-3094-04	KNOB (NB ETC)		

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

TS-140S/680S**PARTS LIST**

x New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 国 新	New Parts	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
120	3C		N15-1040-46	FLAT WASHER		
121	2G		N19-0637-04	FLAT WASHER (MAIN KNOB)		
A	2H		N09-0256-05	GND SCREW (SUB PANEL)		
B	3D		N09-0372-04	SCREW (PULLEY)		
C	1F		N88-2608-46	FLAT HEAD TAPITTE SCREW		
D	2G, 2H		N09-0644-14	BIND SCREW (FRONT GLASS)		
E	2F		N30-2606-41	PAN HEAD MACHINE SCREW		
F	3C		N30-4014-41	PAN HEAD MACHINE SCREW (GND)		
G	2G, 1T		N32-2606-46	FLAT HEAD MACHINE SCREW		
H	2A		N32-3006-46	FLAT HEAD MACHINE SCREW		
I	3C		N09-0623-04	SEMS SCREW (50MHZ MODULE)		
J	1A, 1B		N33-3006-41	NYL HEAD MACHINE SCREW (CASE)		B
K	3E, 2D		N87-2606-46	BRAZIER HEAD TAPITTE SCREW		
L	2F		N87-3006-41	BRAZIER HEAD TAPITTE SCREW		
M	2A, 1C		N87-3006-46	BRAZIER HEAD TAPITTE SCREW		
N	3A		N87-3008-41	BRAZIER HEAD TAPITTE SCREW		
O	2A		N88-3006-46	FLAT HEAD TAPITTE SCREW		
P	2D		N87-3010-41	BRAZIER HEAD TAPITTE SCREW (ANT)		
R	2G		N90-2606-46	TP HEAD MACHINE SCREW		
R1			RS14AB30560J	FL-PROOF RS-56 J 1W		
129	1H		S40-2437-15	PUSH SWITCH (POWER)		
-			S50-1406-09	SENSITIVE SWITCH (MICROPHONE)	EM	
133	3C	*	T07-0252-05	SPEAKER		
134	1J	*	T91-0352-15	MICROPHONE	EM	
137	1D	*	W02-0802-05	ENCODER ASSY	FOR SERVICE MANUALS	
138	3F	*	W02-0515-05	LITHIUM BATTERY	CONTACT: MAURITRON TECHNICAL SERVICES www.mauritron.co.uk TEL: 01844 - 351694 FAX: 01844 - 352554	
142	11, 1H	*	X41-3030-00	SWITCH UNIT		
142	11, 1H	*	X41-3030-11	SWITCH UNIT		
144	1C	*	X45-3100-00	FINAL UNIT		B
144	1C	*	X45-3100-11	FINAL UNIT		B
145	2C, 1F	*	X51-3040-00	FILTER UNIT		B
145	2C, 1F	*	X51-3040-11	FILTER UNIT		B
146	3F	*	X53-3100-11	CONTROL UNIT		B
146	3F	*	X53-3100-12	CONTROL UNIT		B
147	1I	*	X54-3050-00	DISPLAY UNIT	EM	
147	1I	*	X54-3050-61	DISPLAY UNIT	W	
148	2F	*	X57-3120-00	SIGNAL UNIT		B
148	2E	*	X57-3200-10	SIGNAL UNIT	KMT	
148	2E	*	X57-3200-61	SIGNAL UNIT	W	
SWITCH UNIT (X41-3030-XX) -00 : TS-680S -11 : TS-140S						
C1	12		CK41FY1E102M	CYLND CHTP C 100PF	M	
C3			CD41FSL1H101J	CYLND CHTP C 100PF	J	
C4			CE04EW1H010M	ELECTRN 1.0UF	SONY	
C5	16		CD41FSL1H101J	CYLND CHTP C 100PF	J	
C7			CK41FY1E222M	CYLND CHTP C 2200PF	M	
C9			CE04EW1H4R7M	ELECTRN 4.7UF	SONY	
C10	11		CE04EW10470M	ELECTRN 4.7UF	10WV	
C12			CE04EW1H010M	ELECTRN 1.0UF	SONY	
C13			CE04EW1H4R7M	ELECTRN 1.0UF	SONY	
C14			CE04EW1H4R7M	ELECTRN 4.7UF	10WV	
C15			CD41FSL1H101J	CYLND CHTP C 100PF	J	A

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE : AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

▲ indicates safety critical components.

TS-140S/680S

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C16 ,17			CEO4EW1H010M	ELECTR0 1.0UF	50WV	A
C18			CEO4EW1H100M	ELECTR0 10UF	50WV	A
C19			CEO4EW1A470M	ELECTR0 4.7UF	10WV	A
CN1			E40-3241-05	PIN CONNECTOR (6P)		
CN2			E40-3237-05	PIN CONNECTOR (2P)		
CN3			E40-3239-05	PIN CONNECTOR (4P)		
CN4			E40-3237-05	PIN CONNECTOR (2P)		
CN5			E40-3239-05	PIN CONNECTOR (4P)		
CN6		*	E31-3307-05	CONNECTING WIRE(AF,SQ)		
CN7		*	E31-3306-05	CONNECTING WIRE(RIT,IF SHIFT)		
CN8			E40-3247-05	PIN CONNECTOR (3P)		
J1	1H		E11-0413-05	PHONE JACK		
R1 --3			RD41FB2B103J	CYLND CHIP R 10K	J 1/8W	
R4			RD41FB2B102J	CYLND CHIP R 1.0K	J 1/8W	
R5			RD41FB2B021J	CYLND CHIP R 820	J 1/8W	
R6			RD41FB2B101J	CYLND CHIP R 100	J 1/8W	
R7			RD41FB2B223J	CYLND CHIP R 22K	J 1/8W	
R8 ,9			RD41FB2B101J	CYLND CHIP R 100	J 1/8W	
R10			RD41FB2B022J	CYLND CHIP R 8.2K	J 1/8W	
R11			RD41FB2B023J	CYLND CHIP R 82K	J 1/8W	
R12 ,13			RD41FB2B472J	CYLND CHIP R 4.7K	J 1/8W	
R14			RD41FB2B332J	CYLND CHIP R 3.3K	J 1/8W	
R15			RD41FB2B101J	CYLND CHIP R 100	J 1/8W	
R16			RD41FB2B221J	CYLND CHIP R 220	J 1/8W	
R17			RD41FB2B102J	CYLND CHIP R 1.0K	J 1/8W	
R18			RD41FB2B101J	CYLND CHIP R 100	J 1/8W	
R19			RD41FB2B562J	CYLND CHIP R 5.6K	J 1/8W	A
R20			RD41FB2B104J	CYLND CHIP R 100K	J 1/8W	A
R21			RD41FB2B103J	CYLND CHIP R 10K	J 1/8W	A
R22			RD41FB2B223J	CYLND CHIP R 22K	J 1/8W	A
R23			RD41FB2B102J	CYLND CHIP R 1.0K	J 1/8W	A
VR1			R12-3127-05	TRIMMING POT. (10K)		
VR2	2I	*	R19-9411-05	POTENTIOMETER (AF,SQ)		
VR3	11	*	R19-3424-05	POTENTIOMETER (RIT,IF SHIFT)		
W1 --11			R92-0670-05	CHIP R 0.0MH		
D1			1N60	DIODE		
D2 ,3			RLS73	CHIP DIODE		
IC1			UPC1150H2	IC(ALC AMP)		
Q1 --3			DTC114EK	DIGITAL TRANSISTOR		
Q4			2SA1162(Y)	TRANSISTOR		
Q5 ,6			ZSC2712(Y)	TRANSISTOR		
Q6			ZSC2712(Y)	CHIP TRANSISTOR		A
FINAL UNIT (X45-3100-XX) -00 : TS-680S -11 : TS-140S						
C1			CK45B1H561K	CERAMIC 560PF	K	
C9			CM93D2H681J	MICA 680PF	J	
C10 ,11			C91-1004-05	CERAMIC 0.0068UF	J	
C12			CC45SL2H1S1J	CERAMIC 150PF	J	
C13			CM73F2H122J	CHIP C 1200PF	J	
C15			C91-0119-05	CERAMIC 0.047UF	K	
C16			CEO4EW1H100M	ELECTR0 10UF	50WV	
C18			CEO4EW1E101M	ELECTR0 100UF	25WV	
C21			C91-0119-05	CERAMIC 0.047UF	K	
C22			CEO4EW1H100M	ELECTR0 10UF	50WV	

E: Scandinavia & Europe K: USA

P: Canada

A : TS-140S (K,M,T,W)

B : TS-680S (K)

U: PX(Far East, Hawaii) T: England

M: Other Areas

UE: AAFES(Europe) X: Australia

△ indicates safety critical components.

TS-140S/680S**PARTS LIST**

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 规 格			Desti- nation 仕 向	Re- marks 備考
C24			CED4EW1E101M	ELECTRQ	100UF	25WV		
C28			CED4EW1E470M	ELECTRQ	47UF	25WV		
C32	, 33		C90-0817-05	FL FCTRQ	1000UF	16WV		
C36			CED4EW1E470M	ELECTRQ	47UF	25WV		
C37			C91-0119-05	CERAMTC	0.047UF	K		
C38			CED4EW1E470M	ELECTRQ	47UF	25WV		
C40	, 41		CED4EW1E470M	ELECTRQ	47UF	25WV		
C42			C91-0119-05	CERAMIC	0.047UF	K		
C43			CC45SL2H121J	CERAMIC	120PF	J		
-			E31-2067-05	COAXIAL CABLE WITH PLUG (SD)				
-			E31-3028-05	COAXIAL CABLE WITH PLUG (PN)				
-		*	E31-3304-05	COAXIAL CABLE WITH PLUG (DRV)				
-		*	E31-3322-05	CONNECTING WIRE				
-		*	E31-3324-05	CONNECTING WIRE (FAN)				
-		*	E31-3327-05	CONNECTING WIRE				
CN1			E40-3238-05	PIN CONNECTOR (3P)				
CN2			E40-3239-05	PIN CONNECTOR (4P)				
CN3			E40-3238-05	PIN CONNECTOR (3P)				
CN4		*	E31-3317-05	CONNECTING WIRE				B
CNS			E40-3237-05	PIN CONNECTOR (2P)				
158	1C		F29-0014-05	INSULATNR				
172	2D	*	F01-0954-01	HEAT SINK				
176	1C	*	F09-0417-05	FAN (MBTRR)				
-		*	F20-0078-05	INSULATING BOARD				
-		*	F20-0582-04	INSULATING BOARD				
178	2D	*	G02-0574-04	LEAF SPRING				
-		*	G02-0571-04	FLAT SPRING (O/P)				
-			L92-0102-05	TRI TIDAL CORE (KT-41)				
-			L92-0106-05	TRI TIDAL CORE (KT-41)				
L1			L40-1501-14	SMALL FIXED INDUCTOR				
L2			L40-3391-14	SMALL FIXED INDUCTOR				
L3			L19-0315-25	TRI TIDAL CNTL				
L4	, 5		L33-0699-05	CHKE COIL				
L6	, 7		L33-0232-05	CHKE COIL (1U)				
L8			L33-0699-05	CHKE COIL				
L9			L19-0342-05	DRIVE TRANSFORMER				
L10	, 11		L33-0617-05	TRI TIDAL COIL				
L12			L39-0424-05	NFB COIL				
L13		*	L39-0431-05	TRI TIDAL CNTL				
L14			L33-0651-05	CHKE COIL				
L15			L33-0617-05	TRI TIDAL COIL				
L16			L40-1011-14	SMALL FIXED INDUCTOR				
L17			L15-0016-05	LOW-FREQUENCY CHKE CNTL				
Q	1C, 1D		N87-3008-46	BRAZIER HEAD TAP/TITE SCREW				
S	1C		N09-0623-04	SEMS SCREW				
T	2C		N35-3006-46	BINDING HEAD MACHINE SCREW				
R5			RC05GF2H3R9J	RC	3.9	J 1/2W		
R8	, 9		RS14DB3A1B1J	FL-PR00F RS	180	J 1W		
R10	, 13		RS14DB3ASR6J	FL-PR00F RS	5.6	J 1W		
R14	, 15		RS14DB3A150J	FL-PR00F RS	15	J 1W		
R16	, 17		RS14DB3A3R3J	FL-PR00F RS	3.3	J 1W		
R18			RS14DB3A100J	FL-PR00F RS	10	J 1W		

E: Scandinavia & Europe

K: USA

P: Canada

A : TS-140S (K, M, T, W)

U: PX(Far East, Hawaii)

T: England

M: Other Areas

B : TS-680S (K)

UE: AAFES(Europe)

X: Australia

△ indicates safety critical components.

TS-140S/680S

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規 格			Desti- nation 仕 向	Re- marks 備考
VR1 ,2			R12-1431-05	TRIMMING PNT. (1K)				
W1			R92-0150-05	JUMPER REST D NHM				A
W2 ,3			R92-1061-05	JUMPER REST D NHM				
K1			S51-2417-05	RELAY				B
D1 ,3			MV-ST	VARISTEER				
D2 ,3			SV-03YS	VARISTEER				B
D4		*	1S1555	DINDE				
D5		*	1S1555	DINDE				
D6		*	SG-5L(R)	DINDE				
D7			MTZB-2JA	ZENER DIODE				
Q1			2SC1971	TRANSISTOR				
Q2 ,3			2SC2509	TRANSISTOR				
Q4 ,5			2SC2879	TRANSISTOR				
Q6 ,7			2SD1406(Y)	TRANSISTOR				
Q8 ,9			AN7805	IC(VOLTAGE REGULATOR/ +5V)				
TH1			STP41L	THERMISTER				
192	1D	*	X59-3370-00	MODULE UNIT				
FILTER UNIT (X51-3040-XX) -00 : TS-680S -11 : TS-140S								
C1			CM93D2H152J	MICA	1500PF	J		
C2			CM93D2H471J	MICA	470PF	J		
C3			CM93D2H152J	MICA	1500PF	J		
C4			CM93D2H221J	MICA	220PF	J		
C5			CM93D2H821J	MICA	820PF	J		
C6			CC45SL2H431J	CERAMIC	430PF	J		
C7			CC45SL2H241J	CERAMIC	240PF	J		
C8 ,9			CC45SL2H431J	CERAMIC	430PF	J		
C10			CC45SL2H151J	CERAMIC	150PF	J		
C11			CC45SL2H331J	CERAMIC	330PF	J		
C12			CC45SL2H820J	CERAMIC	82PF	J		
C13			CC45SL2H331J	CERAMIC	330PF	J		
C14			CC45SL2H101J	CERAMIC	100PF	J		
C15			CC45SL2H431J	CERAMIC	430PF	J		
C16			CC45SL2H331J	CERAMIC	330PF	J		
C17			CC45SL2H151J	CERAMIC	150PF	J		
C18			CC45SL2H330J	CERAMIC	33PF	J		
C19 ,20			CC45SL2H151J	CERAMIC	150PF	J		
C21			CC45SL2H21J	CERAMIC	120PF	J		
C22			CC45SL2H101J	CERAMIC	180PF	J		
C23			CC45SL2H820J	CERAMIC	82PF	J		
C24			CC45SL2H680J	CERAMIC	68PF	J		
C25			CC45SL2H181J	CERAMIC	180PF	J		
C26			CC45SL2H121J	CERAMIC	120PF	J		
C27			CC45SL2H101J	CERAMIC	100PF	J		
C28			CC45SL2H470J	CERAMIC	47PF	J		
C29			CC45SL2H680J	CERAMIC	68PF	J		
C30			CC45SL2H330J	CERAMIC	33PF	J		
C31			CC45SL2H820J	CERAMIC	82PF	J		
C32			CC45SL2H680J	CERAMIC	68PF	J		
C33			CC45SL2H100D	CERAMIC	10PF	D		
C34			CC45SL2H820J	CERAMIC	82PF	J		
C35 ,36			CC45SL2H330J	CERAMIC	33PF	J		
C37			CC45SL2H270J	CERAMIC	27PF	J		
C38			CC45SL2H120J	CERAMIC	12PF	J		B

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

TS-140S/680S**PARTS LIST**

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 值	New Parts 新 品	Parts No. 部品番号	Description 部品名 / 規格			Desti- nation 仕 向	Re- marks 備考
C39			CC45SL2H270J	CERAMIC	27PF	J		B
C40 -41			CC45SL2H330J	CERAMIC	33PF	J		B
C42 -43			CC45SL2H560J	CERAMIC	56PF	J		B
C66			CC45CH2H030C	CERAMIC	3.0PF	C		B
C67			CC45CH1H560J	CERAMIC	56PF	J		B
C68			CC45CH1H101J	CERAMIC	100PF	J		B
C79			CC45CH1H680J	CERAMIC	68PF	J		B
C80			CK45B1H472K	CERAMIC	4700PF	K		B
C81 -82			CE04EW1E470M	ELECTRA	47UF	25WU		B
C83			CE04EW1H3R3M	ELECTRA	3.3UF	50WU		B
C84 -85			CK45B1H472K	CERAMIC	4700PF	K		B
T01			COS-0309-05	TRIMMING CAP	(40P)			B
T02			COS-0030-15	TRIMMING CAP	(20P)			B
CN1			E40-3238-05	PIN CONNECTOR	(3P)			B
CN2			E40-3238-05	PIN CONNECTOR	(3P)			B
CN3			E40-3242-05	PIN CONNECTOR	(7P)			B
CN4			E40-3239-05	PIN CONNECTOR	(4P)			B
CN5			E04-0157-05	PIN CONNECTOR				B
CN6			E04-0157-05	PIN CONNECTOR	(3P)			B
CN7			E40-5059-05	PIN CONNECTOR	(5P)			B
CN8 -9			E31-3330-15	CONNECTING WIRE				B
CN10			E40-5059-05	PIN CONNECTOR	(5P)			B
196	1F		J32-0761-04	BOSS				
-			L92-0102-05	TR01DAL CNTL	CTT-41			
-			L92-0107-05	TR01DAL CNTL	CT50-20			
-			L92-0108-05	TR01DAL CNTL	CT50-60			
L1			L34-3148-05	TR01DAL CNTL				
L2			L34-3147-05	TR01DAL CNTL				
L3			L34-3150-05	TR01DAL CNTL				
L4			L34-3149-05	TR01DAL CNTL				
L5			L34-3152-05	TR01DAL CNTL				
L6			L34-3151-05	TR01DAL CNTL				
L7			L34-3153-05	TR01DAL CNTL				
L8			L34-3154-05	TR01DAL CNTL				
L9 -10			L34-3156-05	CNTL				
L11			L34-3157-05	CNTL				
L12			L34-3158-05	CNTL				
L13 -15			L34-1021-05	CNTL				H
L16			L33-0222-05	CNTL				B
L17			L34-1022-05	CNTL				B
L18			L34-1027-05	CNTL				B
L19			L39-0406-05	TR01DAL CNTL				B
L20			L33-0651-05	CHGKE CNTL				B
L21 -22			L40-1011-14	SMALL FIXED INDUCTOR				B
L22			L40-1011-14	SMALL FIXED INDUCTOR				B
L23 -24			L40-1021-14	SMALL FIXED INDUCTOR				B
L25 -30			L40-1011-14	SMALL FIXED INDUCTOR				B
L31			L40-1011-14	SMALL FIXED INDUCTOR				B
L32			L40-6825-04	SMALL FIXED INDUCTOR				
II	1F		N30-3006-46	PAN HEAD MACHINE SCREW				
VR1			R12-0431-05	TRIMMING POT. (100)				
W17 -19			R92-0150-05	JUMPER REST 0 ΩHM				

E: Scandinavia & Europe K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 部品番号	Parts No. 部品番号	Description 部品名 / 規格			Desti- nation 仕向	Re- marks 備考
W20			R92-0150-05	JUMPER REST	0.0MM			A
K1 -12			S51-1432-05	RELAY				B
K13 -15			S51-1432-05	RELAY				
K16			S51-1429-05	RELAY				
D1 -6			1S1555	DIODE				B
D7			1S1555	DIODE				
D8			1S1555	DIODE				
D9 ,10			1SS101	DIODE				
D11			DSP-301N	SURGE ABSORBER				
Q1			ZSD253B-22-A	TRANSISTOR				B
Q2			M57735	IC(POWER MODULE)				B
Q3			ZSD2459(BL)	TRANSISTOR				
CONTROL UNIT (X53-3100-XX) -11 : TS-140S -12 : TS-680S								
C2			CE04EW1C470M	ELECTRN	47UF	16WV		
C3 ,4			CK41FY1E102M	CYLND CHIP	C 1000PF	M		
C5			C092M1H473K	MYLAR	0.047UF	K		
C6			C092M1H223K	MYLAR	0.022UF	K		
C7			CK41FY1E222M	CYLND CHIP	C 2200PF	M		
C9			CE04EW1C470M	ELECTRN	47UF	16WV		
C10			CC41FUJ1H220J	CYLND CHIP	C 22PF	J		
C11			CC41FCH1H100D	CYLND CHIP	C 10PF	D		
C13			CC41FCH1H150J	CYLND CHIP	C 15PF	J		
C14			CC41FCH1H120J	CYLND CHIP	C 12PF	J		
C15			CC41FCH1H050C	CYLND CHIP	C 5.0PF	C		
C16			CK41FY1E102M	CYLND CHIP	C 1000PF	M		
C17			CE04EW1C470M	ELECTRN	47UF	16WV		
C18 ,19			CK41FY1E102M	CYLND CHIP	C 1000PF	M		
C21			CK41FY1E102M	CYLND CHIP	C 1000PF	M		
C23			CE04EW1C220M	ELECTRN	22UF	16WV		
C25			CK41FB1H391K	CYLND CHIP	C 390PF	K		
C26			CK41FW1H021M	CYLND CHIP	C 820PF	M		
C27			CK41FB1H391K	CYLND CHIP	C 390PF	K		
C30			CE04EW1C220M	ELECTRN	22UF	16WV		
C33			CC41FSL1H330J	CYLND CHIP	C 33PF	J	FOR SERVICE MANUALS	
C34			CC41FSL1H680J	CYLND CHIP	C 68PF	J	CONTACT:	
C35			CC41FSL1H330J	CYLND CHIP	C 33PF	J	MAURITRON TECHNICAL SERVICES	
C38			CE04EW1C470M	ELECTRN	47UF	16WV	www.mauritron.co.uk	
C40			CK41FY1E102M	CYLND CHIP	C 1000PF	M	TEL: 01844 - 351694	
C41			C092M1H223K	MYLAR	0.022UF	K	FAX: 01844 - 352554	
C42			C092M1H103K	MYLAR	0.010UF	K		
C43			CK41FY1E222M	CYLND CHIP	C 2200PF	M		
C45			CE04EW1C470M	ELECTRN	47UF	16WV		
C46			CC41FCH1H100D	CYLND CHIP	C 10PF	D		
C48			CC41FCH1H220J	CYLND CHIP	C 22PF	J		
C49			CC73FCH1H270J	CHIP C	27PF	J		
C50			CC41FCH1H050C	CYLND CHIP	C 5.0PF	C		
C52			CE04EW1C470M	ELECTRN	47UF	16WV		
C58			CC41FSL1H270J	CYLND CHIP	C 27PF	J		
C59			CC41FSL1HS60J	CYLND CHIP	C 56PF	J		
C60			CC41FSL1H270J	CYLND CHIP	C 27PF	J		
C72			CK41FA1H181K	CYLND CHIP	C 180PF	K		
C73			CK41FB1H391K	CYLND CHIP	C 390PF	K		
C74			CK41FA1H181K	CYLND CHIP	C 180PF	K		

E: Scandinavia & Europe K: USA

P: Canada

U: PX(Far East, Hawaii) T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

▲ Indicates safety critical components.

TS-140S/680S

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 部品番号	Parts No. 部品番号	Description 部品名 / 規 格	Desti- nation 仕 向	Re- marks 備考
C77		CC41FCH1H030C	CYLND CHIP C 3.0PF	C		
C78		CC73FCH1H560J	CHIP C 56PF	J		
C79		CC41FUJ1H180J	CYLND CHIP C 18PF	J		
C80		CC41FCH1H020C	CYLND CHIP C 2.0PF	C		
C82		CE04EW1C220M	ELECTR8 22UF	16WV		
C87 -B3		CC41FSL1H560J	CYLND CHIP C 56PF	J		
C90		CC41FSL1H330J	CYLND CHIP C 33PF	J		
C91		CC41FSL1H560J	CYLND CHIP C 56PF	J		
C92		CC41FSL1H330J	CYLND CHIP C 33PF	J		
C99		CC41FCH1H020C	CYLND CHIP C 2.0PF	C		
C101		CC41FCH1H030C	CYLND CHIP C 3.0PF	C		
C102		CC41FCH1H100D	CYLND CHIP C 10PF	D		
C110,111		CC41FCH1H010C	CYLND CHIP C 1.0PF	C		
C118-120		CC41FCH1H040C	CYLND CHIP C 4.0PF	C		
C121		CC41FCH1H150J	CYLND CHIP C 15PF	J		
C124		CC41FSL1H560J	CYLND CHIP C 56PF	J		
C125		CC41FSL1H121J	CYLND CHIP C 120PF	J		
C126		CC41FSL1H560J	CYLND CHIP C 56PF	J		
C133		CK41FY1E102M	CYLND CHIP C 1000PF	M		
C134,135		CC41FCH1H0R5C	CYLND CHIP C 0.0PF	C		
C136		CK41FY1E102M	CYLND CHIP C 1000PF	M		
C138,139		CC41FCH1H010C	CYLND CHIP C 1.0PF	C		
C144		CK41FY1E102M	CYLND CHIP C 1000PF	M		
C153		CC41FCH1H030C	CYLND CHIP C 3.0PF	C		
C154		CC41FCH1H150J	CYLND CHIP C 15PF	J		
C155		CC41FCH1H040C	CYLND CHIP C 4.0PF	J		
C156		CC41FCH1H150J	CYLND CHIP C 15PF	J		
C157		CC41FCH1H040C	CYLND CHIP C 4.0PF	C		
C158		CC41FCH1H150J	CYLND CHIP C 15PF	J		
C159		CC41FCH1H030C	CYLND CHIP C 3.0PF	C		
C162		CC73FCH1H560J	CHIP C 56PF	J		
C166		CE04EW1C470M	ELECTR8 47UF	16WV		
C167,168		CK41FY1E102M	CYLND CHIP C 1000PF	M		
C169		CC41FCH1H0R5C	CYLND CHIP C 0.0PF	C		
C170		CC92M1H103K	MYLAR 0.010UF	K		
C171		C91-1103-05	FILM 0.47UF	63WV		
C173		CE04EW1C101M	ELECTR8 100UF	16WV		
C177		CE04EW1C470M	ELECTR8 47UF	16WV		
C179		CK41FY1E102M	CYLND CHIP C 1000PF	M		
C180		CC92M1H223K	MYLAR 0.022UF	K		
C181	*	C91-1101-05	FILM 0.22UF	63WV		
C182		CE04EW1H100M	ELECTR8 10UF	50WV		
C183		C91-0117-05	CERAMIC 0.01UF	K		
C184		CS1SE1VR47M	TANTAL 0.47UF	35WV		
C186		CE04EW1C470M	ELECTR8 47UF	16WV		
C187		CK45B1H182K	CERAMIC 1800PF	K		
C188		CC41FUJ1H070D	CYLND CHIP C 7.0PF	D		
C189		CC41FCH1H100D	CYLND CHIP C 10PF	D		
C191,192		CC73FCH1H330J	CHIP C 33PF	J		
C193		CC41FCH1H050C	CYLND CHIP C 5.0PF	C		
C195		CE04EW1C470M	ELECTR8 47UF	16WV		
C197		CC41FCH1H120J	CYLND CHIP C 12PF	J		
C198		CC41FCH1H100D	CYLND CHIP C 10PF	D		
C201		CC41FSL1H270J	CYLND CHIP C 27PF	J		
C202		CC41FCH1H220J	CYLND CHIP C 22PF	J		

E: Scandinavia & Europe

K: USA

P: Canada

A : TS-140S (K,M,T,W)

U: PX(Far East, Hawaii)

T: England

M: Other Areas

B : TS-680S (K)

UE: AAFES(Europe)

X: Australia

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕向	Re- marks 備考
C203			CC41FSL1H270J	CYLND CHIP C 27PF	J	
C204-209			CC41FSL1H101J	CYLND CHIP C 100PF	J	
C215			CED4EW1C470M	ELECTRN 47UF	16WV	
C217			CED4EW1C101M	ELECTRN 100UF	16WV	
C220			CK41FB1H471K	CYLND CHIP C 470PF	K	
C221,222			CC73FCH1H270J	CHIP C 27PF	J	
C223			CC41FCH1H100D	CYLND CHIP C 10PF	D	
C224			CK73FB1H332K	CHIP C 3300PF	K	
C229			CE04EW1C470M	ELECTRN 47UF	16WV	
C232			C90-2041-05	ELECTRN 10UF	10WV	
C234			CE04EW1C470M	ELECTRN 47UF	16WV	
C237			CE04EW1C470M	ELECTRN 47UF	16WV	
C260-267			CK41FB1H471K	CYLND CHIP C 470PF	K	
C273,274			CK41FB1H471K	CYLND CHIP C 470PF	K	
C277,278			CK41FY1E102M	CYLND CHIP C 1000PF	M	
C280-283			CK41FY1E102M	CYLND CHIP C 1000PF	M	
C286-293			CC41FSL1H101J	CYLND CHIP C 100PF	J	
TC1			COS-0309-05	TRIMMING CAP (40PF)		
—			E23-0512-05	TERMINAL		
CN1			E40-3237-05	PIN CONNECTOR (2P)		
CN2			E40-3238-05	PIN CONNECTOR (3P)		
CN3			E04-0157-05	RF COAXIAL CABLE RECEPTACLE		
CN4			E40-3230-05	PIN CONNECTOR (3P)		
CN5			E40-3237-05	PIN CONNECTOR (2P)		
CN6			E04-0157-05	RF COAXIAL CABLE RECEPTACLE		
CN7			E40-3237-05	PIN CONNECTOR (2P)		
CN8			E40-3242-05	PIN CONNECTOR (7P)		
CN9			E40-5066-05	PIN CONNECTOR (9P)		
CN10	*		E40-5141-05	FPC CONNECTOR (26P)		FOR SERVICE MANUALS
CN11	*		E40-5133-05	FPC CONNECTOR (18P)		CONTACT:
CN12			E40-3239-05	PIN CONNECTOR (4P)		MAURITRON TECHNICAL SERVICES
CN13			E40-3240-05	PIN CONNECTOR (5P)		
CN14			E40-3239-05	PIN CONNECTOR (3P)		
CN15			E02-2001-05	IC SOCKET (28P)		www.mauritron.co.uk
A1 -4			F11-0817-04	SHIELDING COVER		TEL: 01844 - 351894
A5			F10-1222-14	SHIELDING COVER		
A6			F11-1021-04	SHIELDING COVER		FAX: 01844 - 352554
A9 -12			F10-1344-04	SHIELDING PLATE		
L1			L40-1011-14	SMALL FIXED INDUCTOR		
L2			L40-1001-14	SMALL FIXED INDUCTOR		
L3			L32-0666-15	COIL (VCR 91MHZ)		
L4 ,5			L40-1011-14	SMALL FIXED INDUCTOR		
L6 ,7			L40-3311-14	SMALL FIXED INDUCTOR		
L8 ,9			L40-3301-17	SMALL FIXED INDUCTOR		
L10			L40-1011-14	SMALL FIXED INDUCTOR		
L11			L40-1501-14	SMALL FIXED INDUCTOR		
L12			L32-0649-05	COIL (VCR 55MHZ)		
L13 ,14			L40-1011-14	SMALL FIXED INDUCTOR		
L15 ,16			L40-2201-17	SMALL FIXED INDUCTOR		
L17	*		L34-4053-05	COIL (10MHZ BPF)		
L18	*		L34-4054-15	COIL (10MHZ BPF)		
L19	*		L34-4053-05	COIL (10MHZ BPF)		
L20			L40-1011-14	SMALL FIXED INDUCTOR		

E: Scandinavia & Europe K: USA

P: Canada

A : TS-140S (K,M,T,W)

B : TS-680S (K)

U: PX(Far East, Hawaii) T: England

M: Other Areas

UE: AAFES(Europe) X: Australia

△ Indicates safety critical components.

TS-140S/680S

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕 向	Re- marks 備考
L21 ,22			L40-1211-17	SMALL FIXED INDUCTOR		
L23 ,24			L40-1011-14	SMALL FIXED INDUCTOR		
L25			L40-2201-17	SMALL FIXED INDUCTOR		
L26 ,27			L40-3301-17	SMALL FIXED INDUCTOR		
L28 ,29			L34-4055-05	CNTL (5.5MHZ BPF)		
L30 ,32			L34-4057-05	CNTL (7.0MHZ BPF)		
L33 ,35			L40-1011-14	SMALL FIXED INDUCTOR		
L36			L40-1292-17	SMALL FIXED INDUCTOR		
L37 ,38			L40-2201-17	SMALL FIXED INDUCTOR		
L39 ,40			L34-4056-05	CNTL (3.9MHZ BPF)		
L42 ,44			L34-4057-05	CNTL (7.0MHZ BPF)		
L45			L40-3991-17	SMALL FIXED INDUCTOR		
L46 ,47			L40-3391-17	SMALL FIXED INDUCTOR		
L48			L40-3991-17	SMALL FIXED INDUCTOR		
L49			L40-1011-14	SMALL FIXED INDUCTOR		
L51			L40-1011-14	SMALL FIXED INDUCTOR		
L52			L40-2211-14	SMALL FIXED INDUCTOR		
L53			L40-2201-14	SMALL FIXED INDUCTOR		
L54			L34-4060-05	CNTL (VCO 40MHZ)		
L55			L40-1011-14	SMALL FIXED INDUCTOR		
L56			L34-1124-05	CNTL		
L57			L40-1011-14	SMALL FIXED INDUCTOR		
L58			L40-1011-13	SMALL FIXED INDUCTOR		
L59			L40-1011-14	SMALL FIXED INDUCTOR		
L60 ,61			L40-1011-13	SMALL FIXED INDUCTOR		
L62			L40-1011-14	SMALL FIXED INDUCTOR		
X1			L77-1299-05	CRYSTAL RESONATOR (3.6MHZ)		
X2			L78-0015-05	RESONATOR (G, 4.4MHZ)		
R1			R90-0229-05	MUL TI-FAMP 10KX3 J	1/8W	
R2			RD41FB2B23J	CYLND CHIP R 22K J	1/8W	
R3			RD41FB2B13J	CYLND CHIP R 3.3K J	1/8W	
R4			RD41FB2B39J	CYLND CHIP R 39K J	1/8W	
R5			RD41FB2B103J	CYLND CHIP R 10K J	1/8W	
R6			RD41FB2B102J	CYLND CHIP R 1.0K J	1/8W	
R7			RD41FB2B101J	CYLND CHIP R 100 J	1/8W	
R8			RD41FB2B22J	CYLND CHIP R 22K J	1/8W	
R9			RD41FB2B103J	CYLND CHIP R 10K J	1/8W	
R10			RD41FB2B102J	CYLND CHIP R 1.0K J	1/8W	
R11			RD41FB2B22J	CYLND CHIP R 22K J	1/8W	
R12			RD41FB2B103J	CYLND CHIP R 100 J	1/8W	
R13			RD41FB2B101J	CYLND CHIP R 100 J	1/8W	
R14			RD41FB2B47J	CYLND CHIP R 470 J	1/8W	
R15			RD41FB2B39J	CYLND CHIP R 3.9K J	1/8W	
R16 ,17			RD41FB2B18J	CYLND CHIP R 1.8K J	1/8W	
R18 ,19			RD41FB2B68J	CYLND CHIP R 680 J	1/8W	
R20			RD41FB2B101J	CYLND CHIP R 100 J	1/8W	
R21			RD41FB2B15J	CYLND CHIP R 15K J	1/8W	
R22			RD41FB2B103J	CYLND CHIP R 10K J	1/8W	
R23			RD41FB2B101J	CYLND CHIP R 100 J	1/8W	
R24			RD41FB2B47J	CYLND CHIP R 470 J	1/8W	
R25 ,26			RD41FB2B101J	CYLND CHIP R 100 J	1/8W	
R27			RD41FB2B18J	CYLND CHIP R 1.8K J	1/8W	
R28			RD41FB2B68J	CYLND CHIP R 680 J	1/8W	
R30			RD41FB2B22J	CYLND CHIP R 22K J	1/8W	

E: Scandinavia & Europe

U: PX(Far East, Hawaii)

UE: AAFES(Europe)

P: Canada

T: England

M: Other Areas

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

PARTS LIST

x New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
R31		RD41FB2B1B2J	CYLND CHIP R 1.8K	J	1/BW
R32		RD41FB2B23J	CYLND CHIP R B2K	J	1/BW
R33		RD41FB2B223J	CYLND CHIP R 22K	J	1/BW
R34		RD41FB2B1D2J	CYLND CHIP R 1.0K	J	1/BW
R35		RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R36		RD41FB2B223J	CYLND CHIP R 22K	J	1/BW
R37		RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R38		RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
R39		RD41FB2B223J	CYLND CHIP R 22K	J	1/BW
R40		RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R41		RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R42		RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R43		RD41FB2B392J	CYLND CHIP R 3.9K	J	1/BW
R44		RD41FB2B182J	CYLND CHIP R 1.8K	J	1/BW
R45		RD41FB2B681J	CYLND CHIP R 680	J	1/BW
R46		RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R47		RD41FB2B681J	CYLND CHIP R 680	J	1/BW
R48		RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R49		RD41FB2B333J	CYLND CHIP R 33K	J	1/BW
R50		RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R52		RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R53		RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R54		RD41FB2B332J	CYLND CHIP R 3.3K	J	1/BW
R55		RD41FB2B181J	CYLND CHIP R 180	J	1/BW
R56		RD41FB2B222J	CYLND CHIP R 2.2K	J	1/BW
R57		RD41FB2B681J	CYLND CHIP R 680	J	1/BW
R58		RD41FB2B562J	CYLND CHIP R 5.6K	J	1/BW
R59		RD41FB2B682J	CYLND CHIP R 6.8K	J	1/BW
R60		RD41FB2B561J	CYLND CHIP R 560	J	1/BW
R61		RD41FB2B223J	CYLND CHIP R 22K	J	1/BW
R62		RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R63		RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R64		RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R65		RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R66		RD41FB2B332J	CYLND CHIP R 3.3K	J	1/BW
R67		RD41FB2B181J	CYLND CHIP R 180	J	1/BW
R68		RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
R69		RD41FB2B681J	CYLND CHIP R 680	J	1/BW
R70		RD41FB2B182J	CYLND CHIP R 1.8K	J	1/BW
R71		RD41FB2B681J	CYLND CHIP R 680	J	1/BW
R72	,73	RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R74		RD41FB2B223J	CYLND CHIP R 22K	J	1/BW
R75		RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R76		RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R78		RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R79		RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R80		RD41FB2B221J	CYLND CHIP R 220	J	1/BW
R81		RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R82		RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
R83		RD41FB2B681J	CYLND CHIP R 680	J	1/BW
R84		RD41FB2B331J	CYLND CHIP R 330	J	1/BW
R85		RD41FB2B272J	CYLND CHIP R 2.7K	J	1/BW
R86		RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R87		RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R88		RD41FB2B332J	CYLND CHIP R 3.3K	J	1/BW

E: Scandinavia & Europe K: USA

P: Canada

U: PX(Far East, Hawaii) T: England

M: Other Areas

UE: AAFES(Europe) X: Australia

A : TS-140S (K,M,T,W)
B : TS-680S (K)

△ indicates safety critical components.

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
 TEL: 01844 - 351694
 FAX: 01844 - 352554

TS-140S/680S**PARTS LIST**

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 部品番号	Parts No. 部品番号	Description 部品名 / 規 格	Desti- nation 仕 向	Re- marks 備考
R89		RD41FB2B122J	CYLND CHIP R 1.2K	J 1/BW		
R90		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R91		RD41FB2B122J	CYLND CHIP R 1.2K	J 1/BW		
R92		RD41FB2B181J	CYLND CHIP R 180	J 1/BW		
R93		RD41FB2B561J	CYLND CHIP R 560	J 1/BW		
R94		RD41FB2B181J	CYLND CHIP R 180	J 1/BW		
R95		RD41FB2B561J	CYLND CHIP R 560	J 1/BW		
R96		RD41FB2B681J	CYLND CHIP R 680	J 1/BW		
R97		RD41FB2B223J	CYLND CHIP R 22K	J 1/BW		
R98		RD41FB2B103J	CYLND CHIP R 10K	J 1/BW		
R99		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R101		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R102		RD41FB2B223J	CYLND CHIP R 22K	J 1/BW		
R103		RD41FB2B103J	CYLND CHIP R 10K	J 1/BW		
R104		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R105		RD41FB2B471J	CYLND CHIP R 470	J 1/BW		
R106, 107		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R108		RD41FB2B681J	CYLND CHIP R 680	J 1/BW		
R109		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R110		RD41FB2B333J	CYLND CHIP R 33K	J 1/BW		
R111		RD41FB2B103J	CYLND CHIP R 10K	J 1/BW		
R112		RD41FB2B220J	CYLND CHIP R 22	J 1/BW		
R113		RD41FB2B681J	CYLND CHIP R 680	J 1/BW		
R114		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R115		RD41FB2B223J	CYLND CHIP R 22K	J 1/BW		
R116		RD41FB2B822J	CYLND CHIP R 8.2K	J 1/BW		
R117, 118		RD41FB2B182J	CYLND CHIP R 1.8K	J 1/BW		
R119		RD41FB2B102J	CYLND CHIP R 1.0K	J 1/BW		
R121		RD41FB2B223J	CYLND CHIP R 22K	J 1/BW		
R122, 123		RD41FB2B472J	CYLND CHIP R 4.7K	J 1/BW		
R124		RD41FB2B123J	CYLND CHIP R 12K	J 1/BW		
R125		RD41FB2B182J	CYLND CHIP R 1.8K	J 1/BW		
R126		RD41FB2B223J	CYLND CHIP R 22K	J 1/BW		
R127		RD41FB2B331J	CYLND CHIP R 330	J 1/BW		
R128		RD41FB2B392J	CYLND CHIP R 3.9K	J 1/BW		
R129		RD41FB2B104J	CYLND CHIP R 100K	J 1/BW		
R130		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R131		RD41FB2B223J	CYLND CHIP R 22K	J 1/BW		
R132		RD41FB2B103J	CYLND CHIP R 10K	J 1/BW		
R133		RD41FB2B102J	CYLND CHIP R 1.0K	J 1/BW		
R134		RD41FB2B223J	CYLND CHIP R 22K	J 1/BW		
R135		RD41FB2B103J	CYLND CHIP R 10K	J 1/BW		
R136		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R137		RD41FB2B471J	CYLND CHIP R 470	J 1/BW		
R138		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R139		RD41FB2B223J	CYLND CHIP R 22K	J 1/BW		
R140		RD41FB2B103J	CYLND CHIP R 10K	J 1/BW		
R141		RD41FB2B101J	CYLND CHIP R 100	J 1/BW		
R142~148		RD41FB2B221J	CYLND CHIP R 220	J 1/BW		
R149		RD41FB2B103J	CYLND CHIP R 10K	J 1/BW		
R150		RD41FB2B223J	CYLND CHIP R 22K	J 1/BW		
R151		RD41FB2B220J	CYLND CHIP R 22	J 1/BW		
R152, 153		RD41FB2B105J	CYLND CHIP R 1.0M	J 1/BW		
R154		RD41FB2B104J	CYLND CHIP R 100K	J 1/BW		
R155		RD41FB2B473J	CYLND CHIP R 47K	J 1/BW		

E: Scandinavia & Europe K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE : AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

TS-140S/680S

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規 格	Desti- nation 仕 向	Re- marks 備考
R156			RD41FB2B223J	CYLND CHIP R 22K	J 1/8W	
R157			RD41FB2B184J	CYLND CHIP R 180K	J 1/8W	
R158			RD41FB2B472J	CYLND CHIP R 4.7K	J 1/8W	
R159			RD41FB2B103J	CYLND CHIP R 10K	J 1/8W	
R160			RD41FB2B223J	CYLND CHIP R 22K	J 1/8W	
R163			RD41FB2B473J	CYLND CHIP R 47K	J 1/8W	
R164			RD41FB2B474J	CYLND CHIP R 470K	J 1/8W	
R165			RD41FB2B104J	CYLND CHIP R 100K	J 1/8W	
R166			RD41FB2B183J	CYLND CHIP R 18K	J 1/8W	
R167~169			RD41FB2B103J	CYLND CHIP R 10K	J 1/8W	
R170~183			RD41FB2B102J	CYLND CHIP R 1.0K	J 1/8W	
R184~188			RD41FB2B101J	CYLND CHIP R 100	J 1/8W	
R189~193			RD41FB2B103J	CYLND CHIP R 10K	J 1/8W	
R194			RD41FB2B274J	CYLND CHIP R 270K	J 1/8W	
R195			RD41FB2B684J	CYLND CHIP R 680K	J 1/8W	
R196			RD41FB2B103J	CYLND CHIP R 10K	J 1/8W	
R197			RD41FB2B274J	CYLND CHIP R 270K	J 1/8W	
R198			RD41FB2B684J	CYLND CHIP R 680K	J 1/8W	
R199, 200			RD41FB2B223J	CYLND CHIP R 22K	J 1/8W	
R201, 202			RD41FB2B472J	CYLND CHIP R 4.7K	J 1/8W	
R203, 204			RD41FB2B103J	CYLND CHIP R 10K	J 1/8W	
R205, 206			RD41FB2B123J	CYLND CHIP R 12K	J 1/8W	
R207, 208			RD41FB2B103J	CYLND CHIP R 10K	J 1/8W	
R209			RD41FB2B472J	CYLND CHIP R 4.7K	J 1/8W	
R210			RD41FB2B473J	CYLND CHIP R 47K	J 1/8W	
R211			RD41FB2B684J	CYLND CHIP R 680K	J 1/8W	
R212			RD41FB2B103J	CYLND CHIP R 10K	J 1/8W	
VR1 ~2		*	R12~1067~05	TRIMMING POT. (2.2K)		
VR3 ~4		*	R12~3096~05	TRIMMING POT. (10K)		
W2 ~3			R92~1061~05	JUMPER REST 0 ΩHM		
D1			1SV53A	VARI-CAP DIODE		
D2 ~3			ITI310TE	VARI-CAP DIODE		
D4 ~6			RLS135	CHIP DIODE		
D7 ~8			RLS73	CHIP DIODE		
D9 ~15			RLS135	CHIP DIODE		
D16			RLS73	CHIP DIODE		
D17			1SV153	VARI-CAP DIODE		
D18 ~21			RLS73	CHIP DIODE		
D24 ~27			RLS73	CHIP DIODE		
D29			1SS133	DIODE		
D31			1SS133	DIODE		
IC1		*	M54927P	IC(FREQ SYNTHESIZER PLL)		
IC2		*	M54459L	IC(PRE SCALER)		
IC3		*	SN74LS90N	IC(DECADE COUNTERS)		
IC4		*	M54927P	IC(FREQ SYNTHESIZER PLL)		
IC5			M54460L	IC(PRE SCALER)		
IC6			SN16913P	IC(DUBLE BALANCED MIXERS)		
IC7			SN74LS90N	IC(DECADE COUNTERS)		
IC8			M74LS93P	IC		
IC9 ~11			SN16913P	IC(DUBLE BALANCED MIXERS)		
IC12			SN76514N	IC		
IC13		*	MB87006	IC(FREQ SYNTHESIZER PLL)		
IC14		*	M54927P	IC(FREQ SYNTHESIZER PLL)		
IC15		*	PST520D	IC(LOW POWER RESET)		
IC16		*	TC4069UBP	IC(CONVERTER X6)		

FOR SERVICE MANUALS
CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

A

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

▲ indicates safety critical components.

TS-140S/680S**PARTS LIST**

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規 格	Desti- nation 仕 向	Re- marks 備考
IC17		*	NE555C	IC(TIMER)		
IC18		*	BU1840DA	IC(CPU)		
IC19		*	SN74LS138N	IC(DECODERS)		
IC20		*	TC5518CPL-20	RAM IC		
IC21		*	27C12B-25JAJ2	R&M IC(MBM)		
IC22~24			TMP8255AP-5	IC(PROGRAMMABLE INTERFACE)		
IC25			TC4069UBP	IC(INVERTER X6)		
IC26		*	LZ92K37	IC(COUNTER)		
IC27			MB4052	IC(4CH 8BIT A/D CONVERTER(ADC))		
01 ~2			2SC2668(Y)	TRANSISTOR		
03			2SC2458(Y)	TRANSISTOR		
04			2SC1959(Y)	TRANSISTOR		
05 ~6			2SC2668(Y)	TRANSISTOR		
07 ~8			2SC2458(Y)	TRANSISTOR		
09			2SC2787(L)	TRANSISTOR		
010 ~15			2SC2668(Y)	TRANSISTOR		
016 ~21			2SC2459(BL)	TRANSISTOR		
022 ~24			2SC2668(Y)	TRANSISTOR		
025			DTA124ES	DIGITAL TRANSISTOR		
026			DTC124ES	DIGITAL TRANSISTOR		
027 ~29			DTA143ES	DIGITAL TRANSISTOR		
030 ~40			DTC144WS	DIGITAL TRANSISTOR		
041 ~43			DTC143TS	DIGITAL TRANSISTOR		
DISPLAY UNIT (X54-3050-XX) -00 : TS-140S(K, M, T), TS-680S -61 : TS-140S(W)						
D18			B30-0855-05	LED(RED)	BN AIR	
D19			B30-0857-05	LED(YLN)	M. SCR	
D20 ~21			B30-0856-05	LED(GRN)	F. LOCK, 1MHZ	
C1 ~2			CK73FF1E104Z	CHIP C	0.10UF Z	
C3			CK73FB1H103K	CHIP C	0.010UF K	
C4			CK73FF1E104Z	CHIP C	0.10UF Z	
C5			C91-0119-05	CERAMIC	0.047UF K	
C6			CK73FF1E104Z	CHIP C	0.10UF Z	
C7 ~8			CK73FB1H103K	CHIP C	0.010UF K	
C9			CEO4EW1C220M	ELECTRN	22UF 16WV	
C10			CEO4EW1H100M	ELECTRN	1UF 50WV	
C11			CEO4EW1H470M	ELECTRN	47UF 50WV	
C12			CK73FF1H473Z	CHIP C	0.047UF Z	
C13			C90-0209-05	ELECTRN	470UF 16WV	
C14 ~15			CK73FF1E104Z	CHIP C	0.10UF Z	
C16			CK73FB1H103K	CHIP C	0.010UF K	
C21			C91-0105-05	CERAMIC	0.0047UF K	
C22			CEO4EW1H470M	ELECTRN	47UF 50WV	
TG1 ~2			C05-0315-05	TRIMMING CAP	(60PF)	W
CN1			E40-3237-05	PIN CONNECTOR	(2P)	
CN2 ~3		*	E40-5131-05	FPC CONNECTOR	(16P)	
CN4			E40-5133-05	FPC CONNECTOR	(18P)	
CN5			E40-3252-05	PIN CONNECTOR		
J1	1H		E06-0858-05	CYLINDRICAL RECEPTACLE	(8P, MIC)	
A1			F10-1344-04	SHIELDING PLATE		
"		*	G13-0862-04	CUSHION		
"		*	J19-1427-03	HOLDER		

E: Scandinavia & Europe K: USA

P: Canada

A : TS-140S (K,M,T,W)

B : TS-680S (K)

U: PX(Far East, Hawaii) T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

▲ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規 格	Desti- nation 仕 向	Re- marks 備考
L1 -3			L40-1011-13	SMALL FIXED INDUCTOR		
L4			L40-2292-14	SMALL FIXED INDUCTOR	W	
L5			L40-2792-14	SMALL FIXED INDUCTOR	W	
CP1			R90-0462-05	MULTI-COMP 47KX8 J 1/4W		
CP2			R90-0274-05	MULTI-COMP 47KX5 J 1/6W		
CP3			R90-0462-05	MULTI-COMP 47KX8 J 1/4W		
R2			RD41FB2B222J	CYLND CHIP R 2.2K J 1/8W		
RS			RD41FB2B562J	CYLND CHIP R 5.6K J 1/8W		
R6			RD41FB2B152J	CYLND CHIP R 1.5K J 1/8W		
R7			RD41FB2B102J	CYLND CHIP R 1.0K J 1/8W		
RB			RD41FB2B101J	CYLND CHIP R 100 J 1/8W		
R9			RD41FB2B152J	CYLND CHIP R 1.5K J 1/8W		
R10			RD41FB2B102J	CYLND CHIP R 1.0K J 1/8W		
R11			RD41FB2B101J	CYLND CHIP R 100 J 1/8W		
R12			RD41FB2B471J	CYLND CHIP R 470 J 1/8W		
R13 -15			RD41FB2B560J	CYLND CHIP R 56 J 1/8W		
R16			RD41FB2B471J	CYLND CHIP R 470 J 1/8W		
VR1	*		R13-1402-05	SLIDE TYPE POT(1K,1K)POWER		
VR2 ,3	*		R13-3405-05	SLIDE TYPE POT(10K)MIC,RF GAIN		
VR4	*		R13-1402-05	SLIDE TYPE POT(1K,1K)NB		
VR5			R12-3129-05	TRIMMING POT. (22K)		
S1 -6			S40-2440-15	PUSH SWITCH		
S7			S31-2409-05	SLIDE SWITCH (CW)		
S8 ,9			S40-2440-15	PUSH SWITCH		
S10 -20			S50-1412-05	TACT SWITCH		
S21			S40-2441-15	PUSH SWITCH (1MHZ)		
S22 -24			S50-1412-05	TACT SWITCH		
S25			S40-2441-15	PUSH SWITCH (RIT)		
-		*	FIP12TM7	FLUORESCENT INDICATOR TUBE		
D1 -16			RLS73	CHIP DIODE		
D17		*	RLZJB.2A	CHIP ZENER DIODE		
IC1			UPD06300C	IC(FL LATCH DRIVER)		
Q1			DTA114EK	DIGITAL TRANSISTOR		
S26			WD2-0308-05	ENCODER ASSY		
Z1	*		WD2-0804-05	ELECTRIC UNIT		
SIGNAL UNIT (X57-3190-00) : TS-680S (X57-3200-XX) -10 : TS-140S(K, M, T) -61 : TS-140S(W)						
C2			CK73EF1E474Z	CHIP C 0.47UF	Z	
C3			CK41FY1E152M	CYLND CHIP C 1500PF	M	
C4			CK73FB1H272K	CHIP C 2700PF	K	
C5			CK41FY1E152M	CYLND CHIP C 1500PF	M	
C6 ,7			CK73EF1E474Z	CHIP C 0.47UF	Z	
C9			CEO4EW1H010M	ELECTRN 1.0UF	50WV	
C10 ,11			CK41FB1H471K	CYLND CHIP C 470PF	K	
C13			CK41FY1E152M	CYLND CHIP C 1500PF	M	
C14			CK73FB1H122K	CHIP C 1200PF	K	
C16			CEO4EW1H010M	ELECTRN 1.0UF	50WV	
C17			CC41FCH1H150J	CYLND CHIP C 15PF	J	
C23			CC41FSL1H820J	CYLND CHIP C 82PF	J	
C24			CC41FCH1H220J	CYLND CHIP C 22PF	J	
C25			CC41FSL1H121J	CYLND CHIP C 120PF	J	
C27			CC41FSL1H390J	CYLND CHIP C 39PF	J	
C28 ,29			CK41FW1H681M	CYLND CHIP C 680PF	M	
C31			CEO4EW1H010M	ELECTRN 1.0UF	50WV	

E: Scandinavia & Europe

K: USA P: Canada

U: PX(Far East, Hawaii)

T: England M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ Indicates safety critical components.

TS-140S/680S**PARTS LIST**

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 部品番号	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕向	Re- marks 備考
C32			CK41FW1H681M	CYLND CHIP C 680PF M		
C33			CK41FB1H471K	CYLND CHIP C 470PF K		
C35			CEO4EW1H010M	ELECTRN 1.0UF 50WV		
C36 ,37			CK73EF1E474Z	CHIP C 0.47UF Z		
C38			CK73EF1E474Z	CHIP C 0.47UF Z		
C39			CK73EF1E474Z	CHIP C 0.47UF Z		B
C47			CK41FB1H271K	CYLND CHIP C 270PF K		
C48			CK41FB1H471K	CYLND CHIP C 470PF K		
C51			CEO4EW1H010M	ELECTRN 1.0UF 50WV		
C52			CC41FSL1H151J	CYLND CHIP C 150PF J		
C53			CK41FA1H181K	CYLND CHIP C 180PF K		
C55			CEO4EW1H010M	ELECTRN 1.0UF 50WV		
C56			CK41FY1E222M	CYLND CHIP C 2200PF M		
C57			CC41FSL1H330J	CYLND CHIP C 33PF J		B
C58			CK41FY1E222M	CYLND CHIP C 2200PF M		B
C60			CC41FSL1H560J	CYLND CHIP C 56PF J		
C62			CEO4EW1H010M	ELECTRN 1.0UF 50WV		
C64			CC41FCH1H120J	CYLND CHIP C 12PF J		
C67			CC41FSL1H270J	CYLND CHIP C 27PF J		
C70			CC45SL1H151J	CERAMIC 150PF J		
C71			CK41FA1H181K	CYLND CHIP C 180PF K		
C72			CC45SL1H151J	CERAMIC 150PF J		
C74			CEO4EW1H010M	ELECTRN 1.0UF 50WV		
C76			CC41FCH1H050C	CYLND CHIP C 5.0PF C		
C77			CEO4EW1E470M	ELECTRN 47UF 25WV		
C78			CC41FCH1H220J	CYLND CHIP C 22PF J		
C79			CC73FCH1H330J	CHIP C 33PF J		
C82			CC41FCH1H050C	CYLND CHIP C 5.0PF C		
C83			CEO4EW1E470M	ELECTRN 47UF 25WV		
C84			CC41FCH1H1000	CYLND CHIP C 10PF D		
C85			CC41FCH1H220J	CYLND CHIP C 22PF J		
C88 ,89			CC41FCH1H050C	CYLND CHIP C 5.0PF C		
C90			CC41FCH1H180J	CYLND CHIP C 18PF J		
C91			CEO4EW1E470M	ELECTRN 47UF 25WV		
C94			C91-0119-05	CERAMIC 0.047UF K		
C95			CC41FCH1H220J	CYLND CHIP C 22PF J		
C96			CEO4EW1E470M	ELECTRN 47UF 25WV		
C98			CC41FCH1H150J	CYLND CHIP C 15PF J		
C101			CK73FB1E223K	CHIP C 0.022UF K		
C103			CC41FCH1H180J	CYLND CHIP C 18PF J		
C104			CC41FCH1H220J	CYLND CHIP C 22PF J		
C107			CC41FSL1H630J	CYLND CHIP C 33PF J		
C112			CC41FSL1H820J	CYLND CHIP C 82PF J		
C113			CC41FCH1H150J	CYLND CHIP C 15PF J		
C116,117			CK73FB1H472K	CHIP C 4700PF K		
C121			CC41FCH1H060D	CYLND CHIP C 6.0PF D		
C122			CC41FCH1H020C	CYLND CHIP C 2.0PF C		
C123			CC41FCH1H040C	CYLND CHIP C 4.0PF C		
C128,129			CK73FB1H472K	CHIP C 4700PF K		
C132			CK73FB1E223K	CHIP C 0.022UF K		
C145,146			CC41FCH1H100D	CYLND CHIP C 10PF D		
C164,165			CEO4EW1HR22M	ELECTRN 0.22UF 50WV		
C166			CEO4EW1E470M	ELECTRN 47UF 25WV		
C171			CC41FCH1H150J	CYLND CHIP C 15PF J		
C173			CEO4EW1HR47M	ELECTRN 0.47UF 50WV		

E: Scandinavia & Europe

K: USA P: Canada

U: PX(Far East, Hawaii)

T: England M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 參照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規 格			Desti- nation 仕 向	Re- marks 備考
C174			CE04EW1H010M	ELECTRN	1.0UF	50WV		
C176			CE04EW1HR47M	ELECTRN	0.47UF	50WV		
C177			CC41FSL1H101J	CYLND CHIP C	100PF	J		
C187, 188			CE04EW1H010M	ELECTRN	1.0UF	50WV		
C190			CC41FSL1H101J	CYLND CHIP C	100PF	J		
C194			CE04EW1H2R2M	ELECTRN	2.2UF	50WV		
C198			CC41FB1H120J	CYLND CHIP C	12PF	J		
C201			C90-2022-05	QS	22UF	16WV		
C202			CC41FSL1H101J	CYLND CHIP C	100PF	J		
C203			CE04EW1H100M	ELECTRN	1.0UF	50WV		
C204, 205			CC41FSL1H470J	CYLND CHIP C	47PF	J		
C206, 207			CK41FB1H221K	CYLND CHIP C	220PF	K		
C209			CE04EW1H100M	ELECTRN	1.0UF	50WV		
C210			CE04EW1H010M	ELECTRN	1.0UF	50WV		
C211			CK73FB1E473M	CHIP C	0.047UF	M		A
C212			CK73FF1E473Z	CHIP C	0.047UF	Z		
C213			CE04EW1E470M	ELECTRN	47UF	25WV		
C214			CE04EW1H0R1M	ELECTRN	0.1UF	50WV		
C215			CE04EW1H100M	ELECTRN	1.0UF	50WV		
C216, 217			CK73FB1H472K	CHIP C	4700PF	K		
C218			CE04EW1H100M	ELECTRN	1.0UF	50WV		
C219			C90-0866-05	ELECTRN	470UF	6.3WV		
C220			CE04EW1C102M	ELECTRN	1000UF	16WV		
C221			CK73FB1E223K	CHIP C	0.022UF	K		
C224			CE04EW1A221M	ELECTRN	220UF	10WV		
C226			CK41FY1E222M	CYLND CHIP C	2200PF	M		
C227			CK41FB1H471K	CYLND CHIP C	470PF	K		
C229			CK41FY1E152M	CYLND CHIP C	1500PF	M		
C230			CK73FB1E223K	CHIP C	0.022UF	K		
C232			CE04EW1E220M	ELECTRN	22UF	25WV		
C233			CK73FB1H562K	CHIP C	5600PF	K		
C234			CK73FB1E223K	CHIP C	0.022UF	K		
C235			CC41FSL1H470J	CYLND CHIP C	47PF	J		
C236			CE04EW1E220M	ELECTRN	22UF	25WV		
C237			CE04EW1HR47M	ELECTRN	0.47UF	50WV		
C238			CE04EW1E330M	ELECTRN	33UF	25WV		
C239			CE04EW1H100M	ELECTRN	1.0UF	50WV		
C240			CE04EW1H010M	ELECTRN	1.0UF	50WV		
C241, 242			CE04EW1E470M	ELECTRN	4.7UF	25WV		
C243			CE04EW1H010M	ELECTRN	1.0UF	50WV		
C244			CE04EW1H100M	ELECTRN	1.0UF	50WV		
C245			CK73FB1H123K	CHIP C	0.012UF	K		
C247, 248			CE04EW1E470M	ELECTRN	47UF	25WV		
C249			CE04EW1H4R7M	ELECTRN	4.7UF	50WV		
C252			CK45E2H222P	CERAMIC	2200PF	P		
C254			CE04EW1E330M	ELECTRN	33UF	25WV		
C258, 259			CK73FB1H472K	CHIP C	4700PF	K		
C261-264			CK73FB1H472K	CHIP C	4700PF	K		
C266			CK73FB1H472K	CHIP C	4700PF	K		
C268			CC41FSL1H680J	CYLND CHIP C	68PF	J		
C271			CK73FB1E223K	CHIP C	0.022UF	K		
C273			CK73FB1E223K	CHIP C	0.022UF	K		
C278			CC41FSL1H330J	CYLND CHIP C	33PF	J		
C279			CC41FSL1HB20J	CYLND CHIP C	82PF	J		
C280			CC41FSL1H270J	CYLND CHIP C	27PF	J		

E: Scandinavia & Europe K: USA

P: Canada

A : TS-140S (K,M,T,W)

B : TS-680S (K)

U: PX(Far East, Hawaii) T: England M: Other Areas

UE: AAFES(Europe) X: Australia

△ indicates safety critical components.

TS-140S/680S

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
C281			CC41FSL1H121J	CYLND CHIP C 120PF	J	B
C282			CC41FSL1H470J	CYLND CHIP C 47PF	J	B
C287			CC41FSL1H470J	CYLND CHIP C 47PF	J	
C288			CC41FSL1H270J	CYLND CHIP C 27PF	J	
C289			CC41FSL1H121J	CYLND CHIP C 120PF	J	
C290			CC41FSL1H330J	CYLND CHIP C 33PF	J	
C291			CC41FSL1H390J	CYLND CHIP C 39PF	J	
C294			CK73FB1E223K	CHIP C 0.022UF	K	
C295			CE04EW1H100M	ELECTRN 10UF	50WV	
C297			CK73FB1H472K	CHIP C 4700PF	K	
C301			CC41FSL1H470J	CYLND CHIP C 47PF	J	
C308			CE04EW1H4R7M	ELECTRN 4.7UF	50WV	
C309			CE04EW1H010M	ELECTRN 1.0UF	50WV	
C312			CE04EW1H100M	ELECTRN 10UF	50WV	
C314			CE04EW1HR47M	ELECTRN 0.47UF	50WV	
C315			CE04EW1E470M	ELECTRN 47UF	25WV	
C316			CE04EW1H4R7M	ELECTRN 4.7UF	50WV	
C318			CE04EW1HR47M	ELECTRN 0.47UF	50WV	
C319,320			CE04EW1H100M	ELECTRN 10UF	50WV	
C322			CE04EW1HR47M	ELECTRN 0.47UF	50WV	
C326			CE04EW1C102M	ELECTRN 1000UF	16WV	
C327			CE04EW1E470M	ELECTRN 47UF	25WV	
C330			CE04EW1E470M	ELECTRN 47UF	25WV	
C334			CC41FSL1H470J	CYLND CHIP C 47PF	J	B
C336			CE04EW1H4R7M	ELECTRN 4.7UF	50WV	
C338			CK73FB1E223K	CHIP C 0.022UF	K	
C340			CK41FY1B6B2M	CYLND CHIP C 6800PF	M	
C354			CE04EW1H4R7M	ELECTRN 4.7UF	50WV	
C356			CC41FSL1H470J	CYLND CHIP C 47PF	J	B
C357			CE04EW1A101M	ELECTRN 100UF	10WV	
C358			CE04EW1H010M	ELECTRN 1.0UF	50WV	
C359			CK73FF1E473Z	CHIP C 0.047UF	Z	
C362			CC41FSL1H101J	CYLND CHIP C 100PF	J	
C363			CC41FCH1H180J	CYLND CHIP C 18PF	J	
C365			CC41FCH1H040C	CYLND CHIP C 4.0PF	C	
C367			CC41FSL1H470J	CYLND CHIP C 47PF	J	B
C368			CC41FSL1H151J	CYLND CHIP C 150PF	J	
C369			CK73EF1C105Z	CHIP C 1.0UF	Z	
C370			CC41FCH1H040C	CYLND CHIP C 4.0PF	C	
C372			C91-0119-05	CERAMIC 0.047UF	K	
C373			CE04EW1E101M	ELECTRN 100UF	25WV	
C374			C91-0117-05	CERAMIC 0.01UF	K	
C376			CK73FB1E473M	CHIP C 0.047UF	M	
C501			CE04EW1H100M	ELECTRN 10UF	50WV	A
C502			CE04EW1E470M	ELECTRN 47UF	25WV	A
C505			CK73FF1E473Z	CHIP C 0.047UF	Z	A
CN1 ,2		*	E40-5131-05	FPC CONNECTOR (16P)		
CN3		*	E40-5141-05	FPC CONNECTOR (26P)		
CN4		*	E40-3238-05	PIN CONNECTOR (3P)		
CN5		*	E40-3242-05	PIN CONNECTOR (7P)		
CN6		*	E31-3320-05	CONNECTING WIRE (VCU)		
CN7			E40-3237-05	PIN CONNECTOR (2P)		
CNB			E40-3239-05	PIN CONNECTOR (4P)		
CN9			E40-3241-05	PIN CONNECTOR (6P)		

E: Scandinavia & Europe K: USA

P: Canada

A : TS-140S (K,M,T,W)

B : TS-680S (K)

U: PX(Far East, Hawaii) T: England M: Other Areas

UE : AAFES(Europe) X: Australia

▲ Indicates safety critical components.

TS-140S/680S

PARTS LIST

*** New Parts**

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕向	Re- marks 備考
CN10			E40-3240-05	PIN CONNECTOR (5P)		
CN11			E40-3238-05	PIN CONNECTOR (3P)		
CN12			E40-3237-05	PIN CONNECTOR (2P)		
CN13			E40-3239-05	PIN CONNECTOR (4P)		
CN14			E40-3237-05	PIN CONNECTOR (2P)		
CN15			E40-5067-05	PIN CONNECTOR (10P)		
CN16			E40-3237-05	PIN CONNECTOR (2P)		
CN17			E40-3239-05	PIN CONNECTOR (4P)		
CN18, 19			E40-3237-05	PIN CONNECTOR (2P)		
CN20-22			E04-0157-05	RF COAXIAL CABLE RECEPTACLE		
CN23			E06-0752-05	CYLINDRICAL RECEPTACLE (REMOTE)		
CN24			E11-0418-05	PHONE JACK (KEY)		
CN25			E11-0414-05	PHONE JACK (EXT, SP)		
CN26	*		E06-0859-05	CYLINDRICAL RECEPTACLE (ACC3)		
CN27			E40-3266-05	PIN CONNECTOR (8P)		
CN28			E06-1351-05	CYLINDRICAL RECEPTACLE (ACC2)		
CN501			E40-3237-05	PIN CONNECTOR (2P)	A	
TP1			E23-0512-05	TERMINAL		
TP2 ,3			E23-0465-05	TERMINAL		
A1	*		F11-1071-14	SHIELDING CASE		
A2	*		F11-1072-14	SHIELDING CASE		
A3 ,4	*		F11-1073-04	SHIELDING CASE		
A5			F10-1344-04	SHIELDING PLATE		
A6	*		F02-0435-04	HEAT SINK		
A9	*		F10-1376-04	SHIELDING PLATE		
-			G02-0574-04	FLAT SPRING		
CF1			L72-0356-05	CERAMIC FILTER (SSB)		
CF2			L72-0355-05	CERAMIC FILTER (AM)		
CF3			L72-0315-05	CERAMIC FILTER (FM)		
L1	*		L34-4046-15	COIL		
L2			L40-8291-17	SMALL FIXED INDUCTOR(8, 2UH)		
L3			L40-1001-17	SMALL FIXED INDUCTOR(10UH)		
L4 ,5			L40-1021-14	SMALL FIXED INDUCTOR(1MH)		
L6			L40-1592-17	SMALL FIXED INDUCTOR(1, 5UH)		
L7			L40-2292-17	SMALL FIXED INDUCTOR(2, 2UH)		
L8			L40-3391-17	SMALL FIXED INDUCTOR(3, 3UH)		
L9			L40-2292-17	SMALL FIXED INDUCTOR(2, 2UH)		
L10			L40-5691-17	SMALL FIXED INDUCTOR(5, 6UH)		
L11			L40-1021-14	SMALL FIXED INDUCTOR(1MH)		
L12			L40-2282-17	SMALL FIXED INDUCTOR(0, 22UH)		
L13			L40-3382-17	SMALL FIXED INDUCTOR(0, 33UH)		
L14			L40-2282-17	SMALL FIXED INDUCTOR(0, 22UH)		
L15 ,16			L40-3991-17	SMALL FIXED INDUCTOR(3, 3UH)		
L17			L40-4791-17	SMALL FIXED INDUCTOR(4, 7UH)		
L18			L40-1021-14	SMALL FIXED INDUCTOR(1MH)		
L20			L40-1021-14	SMALL FIXED INDUCTOR(1MH)		
L21			L40-2292-17	SMALL FIXED INDUCTOR(2, 2UH)		
L22			L40-1592-17	SMALL FIXED INDUCTOR(1, 5UH)		
L23			L40-2292-17	SMALL FIXED INDUCTOR(2, 2UH)		
L24			L40-1021-14	SMALL FIXED INDUCTOR(1MH)		
L25 ,26			L40-2282-17	SMALL FIXED INDUCTOR(0, 22UH)		
L27			L40-3982-17	SMALL FIXED INDUCTOR(0, 39UH)		
L28			L40-1292-17	SMALL FIXED INDUCTOR(1, 2UH)		

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

E: Scandinavia & Europe

U: PX(Far East, Hawaii)

UE: AAFES(Europe)

K: USA

T: England

M: Other Areas

P: Canada

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

TS-140S/680S

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕向	Re- marks 備考
L29			L40-6882-17	SMALL FIXED INDUCTOR(0.60UH)		
L31			L40-1292-17	SMALL FIXED INDUCTOR(1.2UH)		
L32			L40-1021-14	SMALL FIXED INDUCTOR(1MH)		
L33			L40-4782-17	SMALL FIXED INDUCTOR(0.47UH)		
L34			L40-3982-17	SMALL FIXED INDUCTOR(0.39UH)		
L35			L40-4782-17	SMALL FIXED INDUCTOR(0.47UH)		
L36			L40-1021-14	SMALL FIXED INDUCTOR(1MH)		
L37			L34-4002-05	C0IL	B	
L38			L40-1001-17	SMALL FIXED INDUCTOR(10UH)	B	
L39			L40-4701-17	SMALL FIXED INDUCTOR(4.7UH)		
L40 ~41	*	L34-1204-05	C0IL	(6T)	B	
L42		L34-4002-05	C0IL		B	
L44		L40-1092-17	SMALL FIXED INDUCTOR(1UH)		B	
L45		L40-1001-17	SMALL FIXED INDUCTOR(10UH)		B	
L46	*	L34-4046-15	C0IL			
L47		L34-1162-05	C0IL	(6T)	B	
L48		L19-0344-05	T0R01DAL C0IL			
L49		L19-0324-05	T0R01DAL C0IL			
L50 ~51		L40-1011-14	SMALL FIXED INDUCTOR(100UH)			
L52		L34-2267-05	C0IL			
L53	*	L34-4047-05	C0IL			
L54 ~55	*	L34-4048-05	C0IL			
L56		L40-1001-17	SMALL FIXED INDUCTOR(10UH)			
L57	*	L34-4049-05	C0IL			
L58		L40-1011-17	SMALL FIXED INDUCTOR(100UH)			
L59 ~60		L34-0664-05	C0IL			
L61		L40-1021-14	SMALL FIXED INDUCTOR(1MH)			
L64		L34-2124-05	C0IL			
L65		L34-0945-05	C0IL			
L66		L40-6825-04	SMALL FIXED TRIODUCTOR(6.6MH)			
L67		L40-2201-14	SMALL FIXED INDUCTOR(22UH)			
L68		L32-019B-05	C0IL			
L69		L40-1801-14	SMALL FIXED INDUCTOR(18UH)			
L70		L32-0649-05	C0IL			
L71		L40-1501-14	SMALL FIXED INDUCTOR(4.7UH)		B	
L72		L32-0639-05	C0IL			
L73		L40-4791-14	SMALL FIXED INDUCTOR(10UH)			
L74		L32-0666-15	C0IL			
L75		L40-1021-14	SMALL FIXED INDUCTOR(1MH)			
L76		L40-1511-17	SMALL FIXED INDUCTOR(150UH)			
L77		L40-4782-17	SMALL FIXED INDUCTOR(0.47UH)			
L78		L40-1011-14	SMALL FIXED INDUCTOR(100UH)			
L79		L19-0344-05	T0R01DAL C0IL			
L80 ~81		L40-1021-14	SMALL FIXED INDUCTOR(1MH)			
L82		L40-1092-17	SMALL FIXED INDUCTOR(1UH)			
L83		L40-1021-14	SMALL FIXED INDUCTOR(1MH)			
L84		L34-0540-05	C0IL			
L85		L34-0863-05	C0IL			
L86		L30-0503-05	C0IL			
L87		L40-1021-14	SMALL FIXED INDUCTOR(1MH)			
L88		L40-3391-13	SMALL FIXED INDUCTOR(3.3UH)			
L89		L34-2283-05	C0IL			
L90 ~93		L40-4701-17	SMALL FIXED INDUCTOR(4.7UH)			
L94	*	L39-0432-05	T0R01DAL C0IL			
L95		L34-2289-05	C0IL			

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(For East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置 断	New Parts 部品番号	Parts No. 部品番号	Description 部品名 / 規 格	Desti- nation 仕 向	Re- marks 備考
L96		*	L39-0440-05	TOROIDAL COIL		
L97		*	L34-4046-15	CNIL		
L98			L40-1011-14	SMALL FIXED INDUCTOR(100UH)		B
L99			L40-3382-17	SMALL FIXED INDUCTOR(0.33UH)		
L100			L40-2282-17	SMALL FIXED INDUCTOR(0.22UH)		
L101		*	L40-1011-14	SMALL FIXED INDUCTOR(100UH)		
L102		*	L34-1204-05	CNIL (BT)		B
L103-105		*	L34-1162-05	CNIL (BT)		B
L106, 107			L40-1011-14	SMALL FIXED INDUCTOR(100UH)		B
L108			L40-1011-14	SMALL FIXED INDUCTOR(100UH)		B
L109			L40-2292-17	SMALL FIXED INDUCTOR(2.2UH)		
L110			L40-4701-14	SMALL FIXED INDUCTOR(47UH)		
L111			L19-0328-05	TOROIDAL CNIL		
L112			L40-1021-14	SMALL FIXED INDUCTOR(1MH)		
L113			L34-2124-05	CNIL		
L114			L40-1011-17	SMALL FIXED INDUCTOR(100UH)		
L117			L40-1011-14	SMALL FIXED INDUCTOR(100UH)		
L118-120			L40-2292-17	SMALL FIXED INDUCTOR(2.2UH)		
L121-122			L40-1011-14	SMALL FIXED INDUCTOR(100UH)		
L124-125			L40-1011-14	SMALL FIXED INDUCTOR(100UH)		
L126			L40-1011-17	SMALL FIXED INDUCTOR(100UH)		
L127-128		*	L40-2282-17	SMALL FIXED INDUCTOR(0.22UH)		
XF1		*	L71-0275-05	MCF		
-			N09-0641-05	SCREW		
CP1			R90-0455-05	MULTI-COMP 4.7KX8		
CP2			R90-0286-05	MULTI-COMP 4.7KX4		
R1			RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R2			RD41FB2B470J	CYLND CHIP R 47	J	1/BW
R3			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R4			RD41FB2B680J	CYLND CHIP R 68	J	1/BW
R5			RD41FB2B21J	CYLND CHIP R 220	J	1/BW
R7			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R8			RD41FB2B680J	CYLND CHIP R 68	J	1/BW
R9			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R10, 11			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R12			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R13			RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R14			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R15			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R16			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R17			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R18			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R19			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R20			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R21			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R22			RD41FB2B21J	CYLND CHIP R 220	J	1/BW
R23			RD41FB2B330J	CYLND CHIP R 33	J	1/BW
R24			RD41FB2B820J	CYLND CHIP R 82	J	1/BW
R25			RD41FB2B122J	CYLND CHIP R 1.2K	J	1/BW
R26			RD41FB2B100J	CYLND CHIP R 10	J	1/BW
R27			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R28			RD41FB2B21J	CYLND CHIP R 220	J	1/BW
R29			RD41FB2B221J	CYLND CHIP R 220	J	1/BW
R30			RD41FB2B101J	CYLND CHIP R 100	J	1/BW

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

TS-140S/680S

TECHNICAL MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

PARTS LIST

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R31			RD41FB2B122J	CYLND CHIP R 1.2K	J	1/BW
R32			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
R34			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R35			RD41FB2B152J	CYLND CHIP R 1.5K	J	1/BW
R36			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R37			RD41FB2B152J	CYLND CHIP R 1.5K	J	1/BW
R38			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R39 ,40			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R41			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R42			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R43			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R44			RD41FB2B223J	CYLND CHIP R 22K	J	1/BW
R45			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R46 ,47			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R48			RD41FB2B223J	CYLND CHIP R 22K	J	1/BW
R49			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R50 ,51			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R52			RD41FB2B223J	CYLND CHIP R 22K	J	1/BW
R53			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R54			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R55			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R56			RD41FB2B223J	CYLND CHIP R 22K	J	1/BW
R57			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R58			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R59			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
R60			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R61			RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R62 ,63			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R64			RD41FB2B330J	CYLND CHIP R 33	J	1/BW
R65			RD41FB2B271J	CYLND CHIP R 270	J	1/BW
R66			RD41FB2B151J	CYLND CHIP R 150	J	1/BW
R67			RD41FB2B220J	CYLND CHIP R 22	J	1/BW
R68			RD41FB2B470J	CYLND CHIP R 47	J	1/BW
R69			RD41FB2B681J	CYLND CHIP R 680	J	1/BW
R70			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R71			RD41FB2B220J	CYLND CHIP R 22	J	1/BW
R72			RD41FB2B150J	CYLND CHIP R 15	J	1/BW
R73 ,75			RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R76 ,77			RD41FB2B821J	CYLND CHIP R 820	J	1/BW
R78 ,80			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
R81			RD41FB2B393J	CYLND CHIP R 39K	J	1/BW
R82			RD41FB2B104J	CYLND CHIP R 100K	J	1/BW
R83			RD41FB2B474J	CYLND CHIP R 470K	J	1/BW
R84			RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R85			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R86 ,88			RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R89			RD41FB2B151J	CYLND CHIP R 150	J	1/BW
R91 ,92			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R93			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R94 ,95			RD41FB2B333J	CYLND CHIP R 33K	J	1/BW
R96			RD41FB2B104J	CYLND CHIP R 100K	J	1/BW
R97			RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R98 ,100			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R101			RD41FB2B101J	CYLND CHIP R 100	J	1/BW

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R102			RD41FB2B682J	CYLND CHIP R 6.8K	J	1/BW
R103, 104			RD41FB2B332J	CYLND CHIP R 3.3K	J	1/BW
R105			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R106			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R107			RD41FB2B221J	CYLND CHIP R 220	J	1/BW
R108			RD41FB2B562J	CYLND CHIP R 5.6K	J	1/BW
R109			RD41FB2B152J	CYLND CHIP R 1.5K	J	1/BW
R110			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R111			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R112			RD41FB2B221J	CYLND CHIP R 220	J	1/BW
R113			RD41FB2B562J	CYLND CHIP R 5.6K	J	1/BW
R114			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R115			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R116			RD41FB2B221J	CYLND CHIP R 220	J	1/BW
R117			RD41FB2B562J	CYLND CHIP R 5.6K	J	1/BW
R118			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R119			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW
R120			RD41FB2B221J	CYLND CHIP R 220	J	1/BW
R121			RD41FB2B562J	CYLND CHIP R 5.6K	J	1/BW
R122			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R123, 124			RD41FB2B562J	CYLND CHIP R 5.6K	J	1/BW
R125			RD41FB2B682J	CYLND CHIP R 6.8K	J	1/BW
R126			RD41FB2B104J	CYLND CHIP R 100K	J	1/BW
R127			RD41FB2B333J	CYLND CHIP R 33K	J	1/BW
R128			RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R129			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R130			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R131			RD41FB2B333J	CYLND CHIP R 33K	J	1/BW
R132			RD41FB2B104J	CYLND CHIP R 100K	J	1/BW
R133			RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R134, 135			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R136, 137			RD41FB2B471J	CYLND CHIP R 470	J	1/BW
R138			RD41FB2B224J	CYLND CHIP R 220K	J	1/BW
R139			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R140			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R141			RD41FB2B332J	CYLND CHIP R 3.3K	J	1/BW
R142			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R143			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
R145, 146			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW
R147			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
R148			RD41FB2B222J	CYLND CHIP R 2.2K	J	1/BW
R149			RD41FB2B682J	CYLND CHIP R 6.8K	J	1/BW
R151			RD41FB2B221J	CYLND CHIP R 220	J	1/BW
R152			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
R153			RD41FB2B222J	CYLND CHIP R 2.2K	J	1/BW
R154			RD41FB2B153J	CYLND CHIP R 15K	J	1/BW
R155			RD41FB2B333J	CYLND CHIP R 33K	J	1/BW
R156			RD41FB2B683J	CYLND CHIP R 68K	J	1/BW
R157			RD41FB2B223J	CYLND CHIP R 22K	J	1/BW
R158, 159			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R160			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
R161			RD41FB2B221J	CYLND CHIP R 220	J	1/BW
R162			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R163			RD41FB2B563J	CYLND CHIP R 56K	J	1/BW
R164			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW

E: Scandinavia & Europe K: USA

P: Canada

A : TS-140S (K,M,T,W)

U: PX(Far East, Hawaii)

T: England

M: Other Areas

B : TS-680S (K)

UE: AAFES(Europe)

X: Australia

△ Indicates safety critical components.

TS-140S/680S

FOR SERVICE MANUALS

CONTACT:

PARTS LIST**MAURITRON TECHNICAL SERVICES**

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 參照番号	Address 位 置	New Parts 部品番号	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕 向	Re- marks 備考
R165			RD41FB2B681J	CYLND CHIP R 680	J 1/BW	
R166			RD41FB2B333J	CYLND CHIP R 33K	J 1/BW	
R167			RD41FB2B152J	CYLND CHIP R 1.5K	J 1/BW	
R168			RD41FB2B333J	CYLND CHIP R 33K	J 1/BW	
R169, 170			RD41FB2B474J	CYLND CHIP R 470K	J 1/BW	
R171			RD41FB2B273J	CYLND CHIP R 27K	J 1/BW	
R172			RD41FB2B153J	CYLND CHIP R 15K	J 1/BW	
R173			RD41FB2B334J	CYLND CHIP R 330K	J 1/BW	
R174			RD41FB2B333J	CYLND CHIP R 33K	J 1/BW	
R175			RD41FB2B152J	CYLND CHIP R 1.5K	J 1/BW	
R176			RD41FB2B562J	CYLND CHIP R 5.6K	J 1/BW	
R177			RD41FB2B602J	CYLND CHIP R 6.8K	J 1/BW	
R178			RD41FB2B101J	CYLND CHIP R 100	J 1/BW	
R179			RD41FB2B103J	CYLND CHIP R 10K	J 1/BW	
R180			RD41FB2B472J	CYLND CHIP R 4.7K	J 1/BW	
R181			RD41FB2B223J	CYLND CHIP R 22K	J 1/BW	
R182			RD41FB2B224J	CYLND CHIP R 220K	J 1/BW	
R183			RD41FB2B101J	CYLND CHIP R 10K	J 1/BW	
R184			RD41FB2B472J	CYLND CHIP R 4.7K	J 1/BW	
R185			RD41FB2B602J	CYLND CHIP R 6.8K	J 1/BW	
R186			RD41FB2B473J	CYLND CHIP R 47K	J 1/BW	
R187			RD41FB2B224J	CYLND CHIP R 220K	J 1/BW	
R188			RD41FB2B101J	CYLND CHIP R 100	J 1/BW	
R189			RD41FB2B222J	CYLND CHIP R 2.2K	J 1/BW	
R190			RD41FB2B104J	CYLND CHIP R 100K	J 1/BW	
R191			RD41FB2B472J	CYLND CHIP R 4.7K	J 1/BW	
R192, 193			RD41FB2B104J	CYLND CHIP R 100K	J 1/BW	
R194			RD41FB2B224J	CYLND CHIP R 220K	J 1/BW	
R195			RD41FB2B101J	CYLND CHIP R 100	J 1/BW	
R196, 197			RD41FB2B472J	CYLND CHIP R 4.7K	J 1/BW	
R198			RD41FB2B103J	CYLND CHIP R 10K	J 1/BW	
R199			RD41FB2B223J	CYLND CHIP R 22K	J 1/BW	
R200			RD41FB2B104J	CYLND CHIP R 100K	J 1/BW	
R201			RD41FB2B101J	CYLND CHIP R 100	J 1/BW	
R202			RD41FB2B222J	CYLND CHIP R 2.2K	J 1/BW	
R203			RD41FB2B821J	CYLND CHIP R 820	J 1/BW	
R204			RD41FB2R331J	CYLND CHIP R 330	J 1/BW	
R205			RD41FB2B332J	CYLND CHIP R 3.3K	J 1/BW	
R206			RD41FB2B102J	CYLND CHIP R 1.0K	J 1/BW	
R207			RD41FB2B103J	CYLND CHIP R 10K	J 1/BW	
R208			RD41FB2B472J	CYLND CHIP R 4.7K	J 1/BW	
R209			RK73FB2A2R2J	CHIP R 2.2	J 1/10W	
R210			RD41FB2B331J	CYLND CHIP R 330	J 1/BW	
R211			RK73FB2A2R2J	CHIP R 2.2	J 1/10W	
R212			RD41FB2B104J	CYLND CHIP R 100K	J 1/BW	
R213			RD41FB2B823J	CYLND CHIP R 82K	J 1/BW	
R214			RD41FB2B473J	CYLND CHIP R 47K	J 1/BW	
R215, 216			RD41FB2B222J	CYLND CHIP R 2.2K	J 1/BW	
R217			RD41FB2B102J	CYLND CHIP R 1.0K	J 1/BW	
R218			RD41FB2B104J	CYLND CHIP R 100K	J 1/BW	
R219			RD41FB2B103J	CYLND CHIP R 10K	J 1/BW	
R220			RD41FB2B102J	CYLND CHIP R 1.0K	J 1/BW	
R221			RD41FB2B153J	CYLND CHIP R 15K	J 1/BW	
R224			RD41FB2B102J	CYLND CHIP R 1.0K	J 1/BW	
R225			RD41FB2B821J	CYLND CHIP R 820	J 1/BW	

E: Scandinavia & Europe K: USA

P: Canada

A : TS-140S (K,M,T,W)

U: PX(Far East, Hawaii) T: England

M: Other Areas

B : TS-680S (K)

UE: AAFES(Europe)

X: Australia

▲ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規 格			Desti- nation 仕 向	Re- marks 備考
R226,227			RD41FB2B104J	CYLND CHIP R 100K	J	1/BW		
R228			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW		
R229,230			RD41FB2B122J	CYLND CHIP R 1.2K	J	1/BW		
R231			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW		
R232			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW		
R233			RD41FB2B101J	CYLND CHIP R 100	J	1/BW		
R234			RD41FB2B333J	CYLND CHIP R 33K	J	1/BW		
R235			RD41FB2B104J	CYLND CHIP R 100K	J	1/BW		
R236			RD41FB2B471J	CYLND CHIP R 470	J	1/BW		
R237			RD41FB2B101J	CYLND CHIP R 100	J	1/BW		
R238			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW		
R239			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW		
R240			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW		
R241			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW		
R242			RD41FB2B101J	CYLND CHIP R 100	J	1/BW		
R243,244			RD41FB2B471J	CYLND CHIP R 470	J	1/BW		
R246~248			RD41FB2B471J	CYLND CHIP R 470	J	1/BW		
R250			RD41FB2B273J	CYLND CHIP R 27K	J	1/BW		
R251			RD41FB2B563J	CYLND CHIP R 56K	J	1/BW		
R252			RD41FB2B332J	CYLND CHIP R 3.3K	J	1/BW		
R253~256			RD41FB2B330J	CYLND CHIP R 33	J	1/BW		
R257			RD41FB2B101J	CYLND CHIP R 100	J	1/BW		
R258			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW		
R259,260			RD41FB2B152J	CYLND CHIP R 1.5K	J	1/BW		
R261			RD41FB2B332J	CYLND CHIP R 3.3K	J	1/BW	B	
R262			RD41FR2B561J	CYLND CHIP R 560	J	1/BW		
R263			RD14BB2E100J	RD 10	J	1/4W		
R264			RD41FB2B681J	CYLND CHIP R 680	J	1/BW		
R265			RD41FB2B223J	CYLND CHIP R 22K	J	1/BW		
R266			RD41FB2B124J	CYLND CHIP R 120K	J	1/BW		
R267			RD41FB2B221J	CYLND CHIP R 220	J	1/BW		
R268			RD41FB2B101J	CYLND CHIP R 100	J	1/BW		
R269			RD41FB2B222J	CYLND CHIP R 2.2K	J	1/BW		
R270			RD41FB2B101J	CYLND CHIP R 100	J	1/BW		
R271			RD41FB2B471J	CYLND CHIP R 470	J	1/BW		
R272			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW		
R273			RD41FB2B471J	CYLND CHIP R 470	J	1/BW		
R274			RD41FB2B101J	CYLND CHIP R 100	J	1/BW		
R275,276			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW		
R277			RD14CB2C224J	RD 220K	J	1/6W		
R278			RD41FB2B104J	CYLND CHIP R 100K	J	1/BW		
R279			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW		
R280			RD14BB2C4R7J	RD 4.7	J	1/6W		
R281			RD41FB2B562J	CYLND CHIP R 5.6K	J	1/BW		
R282			RD41FB2B332J	CYLND CHIP R 3.3K	J	1/BW		
R284			RD41FB2B222J	CYLND CHIP R 2.2K	J	1/BW		
R285			RD41FB2B332J	CYLND CHIP R 3.3K	J	1/BW		
R286			RD41FB2B101J	CYLND CHIP R 100	J	1/BW		
R287			RD41FB2B473J	CYLND CHIP R 47K	J	1/BW		
R288			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW		
R289,290			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW		
R291			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/BW		
R292			RD41FB2B562J	CYLND CHIP R 5.6K	J	1/BW		
R293			RD41FB2B223J	CYLND CHIP R 22K	J	1/BW		
R294			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW		

E: Scandinavia & Europe

U: PX(Far East, Hawaii)

UE : AAFES(Europe)

K: USA

T: England

X: Australia

P: Canada

M: Other Areas

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

TS-140S/680S

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格			Desti- nation 仕 向	Re- marks 備考
R295			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/8W		
R296			RD41FB2B222J	CYLND CHIP R 2.2K	J	1/8W		
R297			RD41FB2B101J	CYLND CHIP R 100	J	1/8W		
R298			RD41FB2B103J	CYLND CHIP R 10K	J	1/8W		
R299			RD41FB2B682J	CYLND CHIP R 6.0K	J	1/8W		
R300			RD41FB2B563J	CYLND CHIP R 56K	J	1/8W		
R301			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/8W		
R302			RD41FB2B333J	CYLND CHIP R 33K	J	1/8W		
R303			RD41FB2B124J	CYLND CHIP R 120K	J	1/8W		
R304			RD41FB2B21J	CYLND CHIP R 220	J	1/8W		
R305			RD41FB2B102J	CYLND CHIP R 1.0F	J	1/8W		
R306			RD41FB2B102J	CYLND CHIP R 5.6K	J	1/8W		
R307			RD41FB2B274J	CYLND CHIP R 27K	J	1/8W		
R308			RD41FB2B633J	CYLND CHIP R 6.0K	J	1/8W		
R309			RD41FB2B821J	CYLND CHIP R 820	J	1/8W		
R310			RD41FB2B727J	CYLND CHIP R 2.7K	J	1/8W		
R311			RD41FB2B104J	CYLND CHIP R 100K	J	1/8W		
R312			RD41FB2B133J	CYLND CHIP R 3.3K	J	1/8W		
R313			RD41FB2B473J	CYLND CHIP R 4.7K	J	1/8W		
R314			RD41FB2B564J	CYLND CHIP R 560K	J	1/8W		
R315			RD41FB2B103J	CYLND CHIP R 10K	J	1/8W		
R316			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/8W		
R317			RD41FB2B104J	CYLND CHIP R 100K	J	1/8W		
R318			RD41FB2B103J	CYLND CHIP R 10K	J	1/8W		
R319			RD41FB2B102J	CYLND CHIP R 4.7K	J	1/8W		
R320			RD41FB2B104J	CYLND CHIP R 100K	J	1/8W		
R321			RD41FB2B73J	CYLND CHIP R 4.7K	J	1/8W		
R322			RD41FB2B103J	CYLND CHIP R 3.3K	J	1/8W		
R323			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/8W		
R324			RD41FB2B104J	CYLND CHIP R 4.7K	J	1/8W		
R325			RD41FB2B104J	CYLND CHIP R 100K	J	1/8W		
R326			RD41FB2B103J	CYLND CHIP R 10K	J	1/8W		
R327			RD41FB2B102J	CYLND CHIP R 4.7K	J	1/8W		
R328			RD41FB2B104J	CYLND CHIP R 100K	J	1/8W		
R329			RD41FB2B103J	CYLND CHIP R 1.0K	J	1/8W		
R330			RD41FB2B102J	CYLND CHIP R 4.7K	J	1/8W		
R331			RD41FB2B104J	CYLND CHIP R 5.6K	J	1/8W		
R332			RD41FB2B373J	CYLND CHIP R 3.7K	J	1/8W		
R333			RD41FB2B294J	CYLND CHIP R 290K	J	1/8W		
R334			RD41FB2B562J	CYLND CHIP R 5.6K	J	1/8W		
R335			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/8W		
R336			RD41FB2B104J	CYLND CHIP R 4.7K	J	1/8W		
R337			RD41FB2B103J	CYLND CHIP R 1.0K	J	1/8W		
R338			RD41FB2B102J	CYLND CHIP R 4.7K	J	1/8W		
R339			RD41FB2B104J	CYLND CHIP R 100K	J	1/8W		
R340			RD41FB2B103J	CYLND CHIP R 1.0K	J	1/8W		
R341			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/8W		
R342			RD41FB2B111J	CYLND CHIP R 1.0K	J	1/8W		
R343			RD41FB2B104J	CYLND CHIP R 4.7K	J	1/8W		
R344			RD41FB2B101J	CYLND CHIP R 100	J	1/8W		
R345			RD41FB2B102J	CYLND CHIP R 4.7K	J	1/8W		
R346			RD41FB2B104J	CYLND CHIP R 5.6K	J	1/8W		
R347			RD41FB2B103J	CYLND CHIP R 1.0K	J	1/8W		
R348			RD41FB2B102J	CYLND CHIP R 4.7K	J	1/8W		
R349			RD41FB2B104J	CYLND CHIP R 4.7K	J	1/8W		
R350			RD41FB2B103J	CYLND CHIP R 1.0K	J	1/8W		
R351			RD41FB2B102J	CYLND CHIP R 4.7K	J	1/8W		
R352			RD41FB2B104J	CYLND CHIP R 100K	J	1/8W		
R353			RD41FB2B103J	CYLND CHIP R 1.0K	J	1/8W		
R354			RD41FB2B222J	CYLND CHIP R 2.2K	J	1/8W		
R355			RD41FB2B103J	CYLND CHIP R 10K	J	1/8W		
R356			RD41FB2B104J	CYLND CHIP R 100K	J	1/8W		
R357			RD41FB2B102J	CYLND CHIP R 4.7K	J	1/8W		
R358			RD41FB2B222J	CYLND CHIP R 2.2K	J	1/8W		
R359			RD41FB2B103J	CYLND CHIP R 10K	J	1/8W		
R360			RD41FB2B102J	CYLND CHIP R 4.7K	J	1/8W		
R361			RD41FB2B222J	CYLND CHIP R 2.2K	J	1/8W		
R362			RD41FB2B104J	CYLND CHIP R 100K	J	1/8W		
R363			RD41FB2B223J	CYLND CHIP R 22K	J	1/8W		
R364			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/8W		
R365			RD41FB2B472J	CYLND CHIP R 4.7K	J	1/8W		

E: Scandinavia & Europe

K: USA

P: Canada

A : TS-140S (K,M,T,W)

U: PX(Far East, Hawaii) T: England M: Other Areas

B : TS-680S (K)

UE: AAFES(Europe)

X: Australia

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Desti- nation 仕向	Re- marks 備考
R367			RD41FB2B105J	CYLND CHIP R 1.0M	J	1/BW
R368,369			RD41FB2B104J	CYLND CHIP R 100K	J	1/BW
R370			RD14CB2C103J	RD 10K	J	1/BW
R371			RD14BD2C100J	RD 10	J	1/BW
R372			RD41FB2B332J	CYLND CHIP R 3.3K	J	1/BW
R373			RD41FB2B101J	CYLND CHIP R 100	J	1/BW
R501~504			RD41FB2B103J	CYLND CHIP R 10K	J	1/BW
R505			RD41FB2B102J	CYLND CHIP R 1.0K	J	1/BW
VR1			R12-0435-05	TRIMMING PNT. (300)		A
VR2			R12-1431-05	TRIMMING PNT. (1K)		A
VR3 ,4			R12-2414-05	TRIMMING PNT. (5K)		
VR5 ,6			R12-3447-05	TRIMMING PNT. (10K)		
VR7	*		R05-5401-05	POTENTIOMETER (100K)		
VR8			R12-1432-05	TRIMMING PNT. (2K)		
VR9 ,10			R12-7407-05	TRIMMING PNT. (500K)		
VR11			R12-7407-05	TRIMMING PNT. (500K)		B
VR12			R12-7407-05	TRIMMING PNT. (500K)		B
VR13			R12-5418-05	TRIMMING PNT. (200K)		
VR14			R12-5417-05	TRIMMING PNT. (100K)		
VR15			R12-5417-05	TRIMMING PNT. (100K)		B
VR16,17			R12-4414-05	TRIMMING PNT. (50K)		
VR18			R12-0435-05	TRIMMING PNT. (300)		
VR19			R12-1431-05	TRIMMING PNT. (1K)		
VR20,21			R12-4414-05	TRIMMING PNT. (50K)		
VR22			R12-3448-05	TRIMMING PNT. (20K)		
VR23			R12-4414-05	TRIMMING PNT. (50K)		
VR24			R12-3447-05	TRIMMING PNT. (10K)		
VR25			R12-1431-05	TRIMMING PNT. (1K)		
VR26			R12-3447-05	TRIMMING PNT. (10K)		
VR501	*		R05-3443-05	POTENTIOMETER (10K)		A
VR502	*		R05-0402-05	POTENTIOMETER (300)		A
W1 ,7			R92-0150-05	JUMPER REST Ø 0.8MM		
W8			R92-1061-05	JUMPER REST Ø 0.8MM		
W9			R92-0150-05	JUMPER REST Ø 0.8MM		B
W10			R92-0687-05	CHIP R Ø 0.8MM		
W11			R92-0687-05	CHIP R Ø 0.8MM		
W12			R92-1061-05	JUMPER REST Ø 0.8MM		
W13 ,14			R92-1061-05	JUMPER REST Ø 0.8MM		
W501,502			R92-1061-05	JUMPER REST Ø 0.8MM		A
W503			R92-0687-05	CHIP R Ø 0.8MM		A
W504,505			R92-0338-05	CYLND CHIP R Ø 0.8MM		A
W506			R92-0687-05	CHIP R Ø 0.8MM		A
K1		*	S51-1436-05	RELAY (ATT)		
K2 ,3		*	S51-2422-05	RELAY		B
K4			S51-1432-05	RELAY		
S1			S31-1411-05	SLIDE SWITCH		
S2			S31-1411-05	SLIDE SWITCH		B
D1 ,3		*	DAN235(K)	CHIP DIODE		
D5			US1090	DIODE		
D6			V00(G)	DIODE		
D7 ,8			RLS135	CHIP DIODE		
D9			V00(G)	DIODE		
D10			US1090	DIODE		
D11			RLS135	CHIP DIODE		

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICESwww.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

TS-140S/680S**PARTS LIST**

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規 格	Desti- nation 仕 向	Re- marks 備考
D12		*	DAN235(K)	CHIP DIODE		
D13 -20			RLS135	CHIP DIODE		B
D21 ,22			RLS135	CHIP DIODE		B
D23			IS1555	DIODE		
D24			DAN202(K)	CHIP DIODE		B
D25			IS1555	DIODE		B
D26			DAP202(K)	CHIP DIODE		B
D27			RLS73	CHIP DIODE		
D28 ,29			DAP202(K)	CHIP DIODE		
D30			UZ3.0B	ZENER DIODE		
D31			DAP202(K)	CHIP DIODE		B
D33			RLS73	CHIP DIODE		
D34 ,37			TTT310TE	VARI-CAP DIODE		
D38			RLS135	CHIP DIODE		
D39 ,40			TTT310TE	VARI-CAP DIODE		
D41			RLS135	CHIP DIODE		
D42 ,43			TTT310TE	VARI-CAP DIODE		B
D44			RLS135	CHIP DIODE		B
D45 ,46			RLS135	CHIP DIODE		
D47			MT204	DIODE		
D48			DAN202(K)	CHIP DIODE		
D49			RLS73	CHIP DIODE		
D50 ,53			RLS135	CHIP DIODE		
D54 ,56			RLS73	CHIP DIODE		
D57			DAN202(K)	CHIP DIODE		
D58 ,60			RLS73	CHIP DIODE		
D61			DAN202(K)	CHIP DIODE		
D62 ,67			RLS73	CHIP DIODE		
D68 ,69			DAN202(K)	CHIP DIODE		
D70			RLS73	CHIP DIODE		
D71			HGM88AS	CHIP DIODE		
D72 ,74			RLS73	CHIP DIODE		
D75			IN60PSPA	DIODE		
D76			RLS73	CHIP DIODE		
D77			DAN202(K)	CHIP DIODE		
D78			RLS73	CHIP DIODE		
D79 ,81			DAN202(K)	CHIP DIODE		
D82			HGM88AS	CHIP DIODE		
D83			RLS73	CHIP DIODE		
D85			DAN202(K)	CHIP DIODE		
D86 ,87			HGM88AS	CHIP DIODE		
D88			RLS73	CHIP DIODE		
D89			DAN202(K)	CHIP DIODE		
D90			IS1555	DIODE		
D91			MTZ9.1JB	ZENER DIODE		
D92			RLS73	CHIP DIODE		
D93			UZ3.0B	ZENER DIODE		
D95			RLS73	CHIP DIODE		
D96			MT204	DIODE		
D97			DAN202(K)	CHIP DIODE		
D98			IN60PSPA	DIODE		
D99 ,102			RLS135	CHIP DIODE		
D103-106			RLS135	CHIP DIODE		
D107			DAN202(K)	CHIP DIODE		
D108			RLS73	CHIP DIODE		B

E: Scandinavia & Europe

K: USA

P: Canada

U: PX(Far East, Hawaii)

T: England

M: Other Areas

UE: AAFES(Europe)

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

TS-140S/680S

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規 格	Desti- nation 仕 向	Re- marks 備考
D109, 110			RLS135	CHIP DIODE		
D111			KB369	VARI-CAP DIODE		
D112~115		*	RLS73	CHIP DIODE		
D116			RLZ3. 6B	CHIP ZENER DIODE		
D117			RLS73	CHIP DIODE		
D118			RLS135	CHIP DIODE		
D119			DAN202(K)	CHIP DIODE		
D120			RLS73	CHIP DIODE		
D122			RLS135	CHIP DIODE		
D123			RLS73	CHIP DIODE		
D124			RLS135	CHIP DIODE		
D125		*	RLZ3. 6B	CHIP ZENER DIODE		
D126			RLS135	CHIP DIODE		
D127			1SS133	DINDE	B	
D128			RLS73	CHIP DIODE		
D129			RLS73	CHIP DIODE		
D501, 502			RLS73	DIODE	A	
D503			UZ3. DB	CHIP ZENER DIODE	A	
IC1		*	M54581P	IC		
IC2			M74LS14SP	IC(DECIMAL DECODER/DRIVER BCD)		
IC3			AN612	IC(BALANCE MODULATOR)		
IC4			UPC2002V	IC(8P AMP X2)		
IC5			SN16913P	IC(DUBLE BALANCED MIXERS)		
IC6			MC3357P	IC(LOW POWER FM IF)		
IC7 ~10			TC4066BP	IC(ANALOG/ DIGITAL SW)		
IC11			LM324N	IC(QUAD 8P AMP X4)		
IC12			AN7808	IC(VOLTAGE REGULATOR +8V)		
01			2SA1162(Y)	CHIP TRANSISTOR	B	
02			2SGA1162(Y)	CHIP TRANSISTOR	B	
03 ~4			DTC114EK	DIGITAL TRANSISTOR	B	
05			DTA143EK	DIGITAL TRANSISTOR	B	
06 ~8			DTA143EK	DIGITAL TRANSISTOR		
09 ~11			2SC2668(Y)	TRANSISTOR		
012			2SK192A(GR)+J	FET	B	
013			2SC2668(Y)	TRANSISTOR		
014			2SC1907	TRANSISTOR		
015			2SC2053	TRANSISTOR		
016			DTA114EK	DIGITAL TRANSISTOR		
017			DTC114EK	DIGITAL TRANSISTOR		
018 ~19			2SK125-S	FET		
020		*	FMC3	DIGITAL TRANSISTOR		
021			3SK122(L)	FET		
022 ~23			2SK125-S	FET		
027			3SK73(GR)	FET		
028			2SA1162(Y)	CHIP TRANSISTOR		
029			2SC2712(Y)	CHIP TRANSISTOR		
030 ~31			3SK73(GR)	FET		
032		*	FMC3	DIGITAL TRANSISTOR		
034			DTC114EK	DIGITAL TRANSISTOR		
035 ~39			DTA143EK	DIGITAL TRANSISTOR		
040 ~42			2SC2712(Y)	CHIP TRANSISTOR		
043 ~44		*	FMC3	DIGITAL TRANSISTOR		
045 ~54			2SC2712(Y)	CHIP TRANSISTOR		
055			DTC114EK	DIGITAL TRANSISTOR		
056 ~59			2SC2712(Y)	CHIP TRANSISTOR		

FOR SERVICE MANUALS

CONTACT

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

E: Scandinavia & Europe

U: PX(Far East, Hawaii)

UE: AAFES(Europe)

K: USA

T: England

M: Other Areas

P: Canada

X: Australia

A : TS-140S (K,M,T,W)

B : TS-680S (K)

△ indicates safety critical components.

TS-140S/680S**PARTS LIST**

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Telle ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
060			2SK192A(Y)	FET		
061			2SA1162(Y)	CHIP TRANSISTOR		
062			DTC114TK	DIGITAL TRANSISTOR		B
063			DTC114EK	DIGITAL TRANSISTOR		B
064			DTC114TK	DIGITAL TRANSISTOR		B
065 ~ 67			DTC114EK	DIGITAL TRANSISTOR		
068			2SK192A(Y)	FET		
069			2SA1162(Y)	CHIP TRANSISTOR		B
070			2SK125-S	FET		B
071			2SC1907	TRANSISTOR		B
072			2SK125-S	FET		B
073			2SC1907	TRANSISTOR		B
074			2SC2712(Y)	CHIP TRANSISTOR		B
075			DTC114EK	DIGITAL TRANSISTOR		B
076			DTA143EK	DIGITAL TRANSISTOR		B
077			DTC114EK	DIGITAL TRANSISTOR		
078			3SK73(GR)	FET		
079 ~ 80			3SK122(L)	FET		
081			2SC2053	TRANSISTOR		
082		*	FMC3	DIGITAL TRANSISTOR		
083			DTC114EK	DIGITAL TRANSISTOR		
084			DTC114EK	DIGITAL TRANSISTOR		
085		*	FMC3	DIGITAL TRANSISTOR		
086			3SK73(GR)	FET		
087			2SA1162(Y)	CHIP TRANSISTOR		
088		*	FMC3	DIGITAL TRANSISTOR		
089			2SC2712(Y)	CHIP TRANSISTOR		
090			2SA1162(Y)	CHIP TRANSISTOR		
091 ~ 92			DTC114EF	DIGITAL TRANSISTOR		
093			DTC114TK	DIGITAL TRANSISTOR		
094 ~ 95			DTC114TK	DIGITAL TRANSISTOR		
096 ~ 97			DTC114EK	DIGITAL TRANSISTOR		
098			2SC2712(Y)	CHIP TRANSISTOR		
099			DTC114EK	DIGITAL TRANSISTOR		
TH1 ~ 4			112-502-A	THERMISTOR		
"			X59-1060-00	SIDE TONE UNIT		
"			X59-1040-00	VNX UNIT		
"		*	X59-3000-02	FM MIC UNIT		
"		1	X59-3340-00	TRX UNIT		
"		3	X59-3350-00	ND2 UNIT		
"		4	X59-3360-00	DELAY TIME UNIT		
SIDE TONE (X59-1060-00)						
C1			CK73FB1E223K	CHIP C	0.022UF	K
C2 ~ 5			CK73FB1H123K	CHIP C	0.012UF	K
C6 ~ 8			CK73FB1E223K	CHIP C	0.022UF	K
"			E23-0471-05	TERMINAL		
R1 ~ 2			RK73FB2A023J	CHIP R	82K	J 1/10W
R3			RK73FB2A223J	CHIP R	22K	J 1/10W
R4			RK73FB2A472J	CHIP R	4.7K	J 1/10W
R5			RK73FB2A102J	CHIP R	1.0K	J 1/10W
R6			RK73FB2A103J	CHIP R	10K	J 1/10W
R7 ~ 8			RK73FB2A333J	CHIP R	33K	J 1/10W
R9			RK73FB2A103J	CHIP R	10K	J 1/10W

E: Scandinavia & Europe

K: USA

P: Canada

A : TS-140S (K,M,T,W)

U: PX(Far East, Hawaii)

T: England

M: Other Areas

B : TS-680S (K)

UE: AAFES(Europe)

X: Australia

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格				Desti- nation 仕向	Re- marks 備考
R10			RK73FB2A333J	CHIP R	33K	J	1/10W		
R11			RK73FB2A183J	CHIP R	18K	J	1/10W		
W1 -6			R92-0670-05	CHIP R	0.8MH				
D1			DAN202(K)	CHIP DIODE					
D2			DAP202(K)	CHIP DIODE					
D3			DAN202(K)	CHIP DIODE					
Q1			2SC2712(Y)	CHIP TRANSISTOR					
VOX (X59-1080-00)									
C1			CK73FB1H102K	CHIP C	1000PF	K			
C2			CK73FB1E223K	CHIP C	0.022UF	K			
-			E23-0471-05	TERMINAL					
R1			RK73FB2A104J	CHIP R	100K	J	1/10W		
R2	-5		RK73FB2A103J	CHIP R	10K	J	1/10W		
R6	-7		RK73FB2A105J	CHIP R	1.0M	J	1/10W		
R8			RK73FB2A474J	CHIP R	470K	J	1/10W		
R9			RK73FB2A105J	CHIP R	1.0M	J	1/10W		
R10			RK73FB2A103J	CHIP R	10K	J	1/10W		
W1 -3			R92-0670-05	CHIP R	0.8MH				
D1 -2			DAP202(K)	CHIP DIODE					
IC1			NJM2904M	IC(OP AMP X2)					
IC2			TC4001BF	IC(NOR X6)					
Q1			2SC2712(Y)	CHIP TRANSISTOR					
FM MIC AMP. (X59-3000-02)									
C1			CC73FCH1H680J	CHIP C	68PF	J			
C2			CK73FB1H561K	CHIP C	560PF	K			
C3			CC73FCH1H390J	CHIP C	39PF	J			
C4			CK73FB1H102K	CHIP C	1000PF	K			
C5			CK73FB1E223K	CHIP C	0.022UF	K			
-			E23-0471-05	TERMINAL					
JR1			R92-0670-05	CHIP R	0.8MH				
R1			RK73FB2A105J	CHIP R	1.0M	J	1/10W		
R2			RK73FB2A823J	CHIP R	82K	J	1/10W		
R3			RK73FB2A562J	CHIP R	5.6K	J	1/10W		
R4			RK73FB2A472J	CHIP R	4.7K	J	1/10W		
R5 -7			RK73FB2A224J	CHIP R	220K	J	1/10W		
R8			RK73FB2A182J	CHIP R	1.8K	J	1/10W		
R9			RK73FB2A104J	CHIP R	100K	J	1/10W		
IC1 -3			NJM4558M	IC(OP AMP X2)					
Q1			2SC2712(Y)	CHIP TRANSISTOR					
TRX (X59-3340-00)									
C1 -3			CK73EB1H473K	CHIP C	0.047UF	K			
-			E23-0471-05	TERMINAL					
R1			RK73FB2A103J	CHIP R	10K	J	1/10W		
R2			RK73FB2A471J	CHIP R	470	J	1/10W		
R3			RK73FB2A103J	CHIP R	10K	J	1/10W		
R4			RK73FB2A471J	CHIP R	470	J	1/10W		
R5			RK73FB2A103J	CHIP R	10K	J	1/10W		
R6	-2		RK73FB2A471J	CHIP R	470	J	1/10W		
W1 -2			R92-0670-05	CHIP R	0.8MH				

E: Scandinavia & Europe K: USA

P: Canada

A : TS-140S (K,M,T,W)

U: PX(Far East, Hawaii) T: England

M: Other Areas

B : TS-680S (K)

UE: AAFES(Europe)

X: Australia

▲ indicates safety critical components.

TS-140S/680S

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格				Desti- nation 仕 向	Re- marks 備考				
D1 .2		*	DAN202(K)	CHIP DIODE									
Q1 .2		*	2SA1204(Y)	CHIP TRANSISTOR									
Q3 .3		*	2SA1182(Y)	CHIP TRANSISTOR									
Q4 .5			DTC114EK	DIGITAL TRANSISTOR									
NB2 (X59-3350-00)													
C1			CK73FB1H103K	CHIP C	0.010UF	K							
C2			CK73FB1H102K	CHIP C	1000PF	K							
C3			CK73EF1E474Z	CHIP C	0.47UF	Z							
-			E23-0471-05	TERMINAL									
R1			RK73FB2A103J	CHIP R	10K	J	1/10W						
R2			RK73FB2A563J	CHIP R	56K	J	1/10W						
R3			RK73FB2A684J	CHIP R	680K	J	1/10W						
R4			RK73FB2A103J	CHIP R	10K	J	1/10W						
R5			RK73FB2A184J	CHIP R	180K	J	1/10W						
W1 .3			R92-0670-05	CHIP R	0.0HM								
I01 .2			TC4011BF	IC (NAND X4)									
Q1 .2			DTC114EK	DIGITAL TRANSISTOR									
DELAY TIME (X59-3360-00)													
C1			CK73FB1H103K	CHIP C	0.010UF	K							
-			E23-0471-05	TERMINAL									
R1 .3			RK73FB2A103J	CHIP R	10K	J	1/10W						
W1 .7		*	R92-0670-05	CHIP R	0.0HM								
D1			DAN202(K)	CHIP DIODE									
I01		*	MB74LS122	IC									
Q1 .5			DTC114EK	DIGITAL TRANSISTOR									
Q6 .6			DTA114EK	DIGITAL TRANSISTOR									
Q7 .7			DTE114TK	DIGITAL TRANSISTOR									
FAN (X59-3370-00)													
C1			CK73FB1H103K	CHIP C	0.010UF	K							
-			F23-0471-05	TERMINAL									
R1			RK73FB2A103J	CHIP R	10K	J	1/10W						
R2			RK73FB2A223J	CHIP R	22K	J	1/10W						
R3			RK73FB2A562J	CHIP R	5.6K	J	1/10W						
R4			RK73FB2A122J	CHIP R	1.2K	J	1/10W						
R5			RK73FB2A562J	CHIP R	5.6K	J	1/10W						
R6			RK73FB2A332J	CHIP R	3.3K	J	1/10W						
R7			RK73FB2A562J	CHIP R	5.6K	J	1/10W						
R8			RK73FB2A223J	CHIP R	22K	J	1/10W						
R9 .10			RK73FB2A103J	CHIP R	10K	J	1/10W						
W1 .2			R92-0670-05	CHIP R	0.0HM								
I01			NJM4558M	IC (OP AMP X2)									
Q1			29C2712(Y)	CHIP TRANSISTOR									
FOR SERVICE MANUALS													
CONTACT:													
MAURITRON TECHNICAL SERVICES													
www.mauritron.co.uk													
TEL: 01844 - 351694													
FAX: 01844 - 352554													

E: Scandinavia & Europe K: USA

P: Canada

A : TS-140S (K,M,T,W)

U: PX(Far East, Hawaii) T: England


M: Other Areas


B : TS-680S (K)

UE: AAFES(Europe) X: Australia


△ indicates safety critical components.


DISASSEMBLY

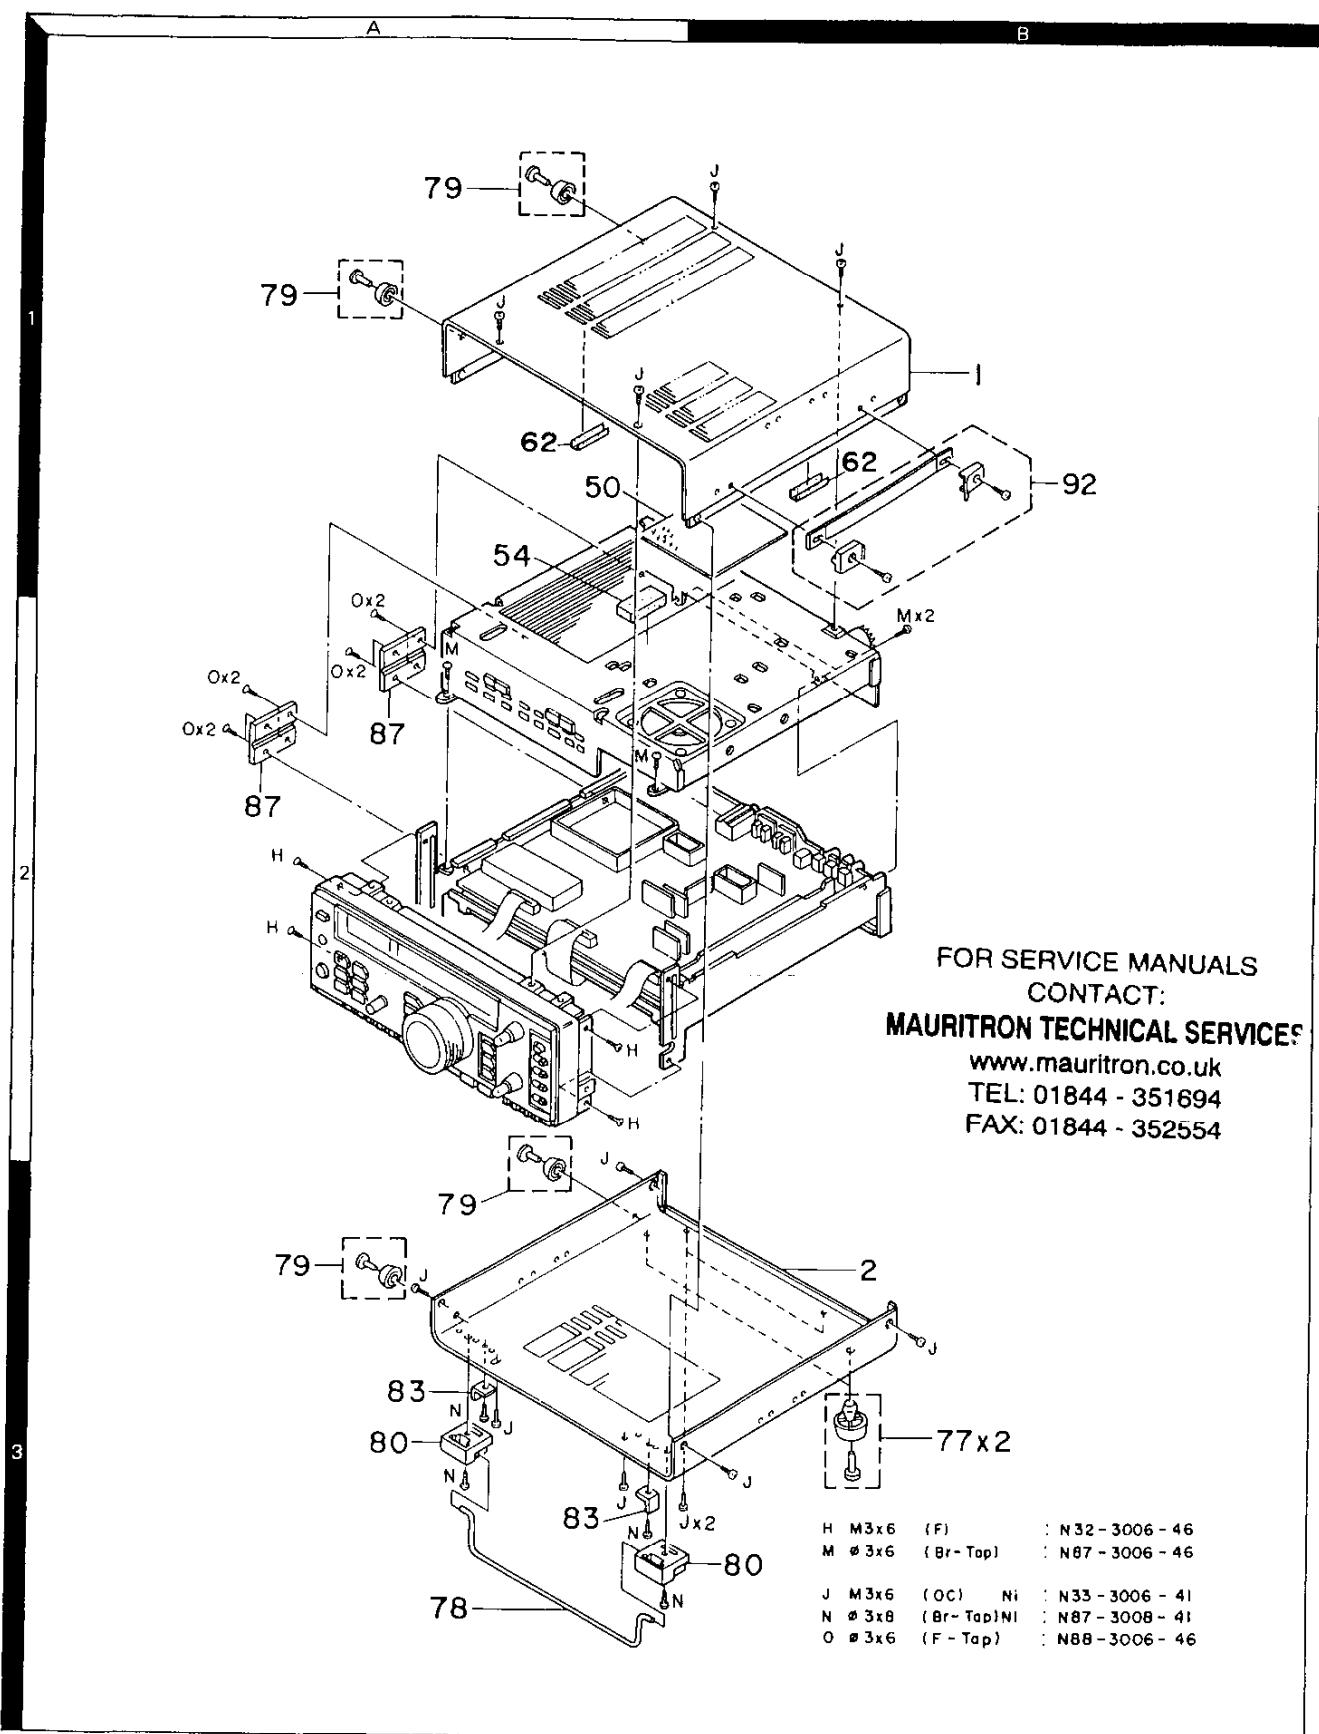

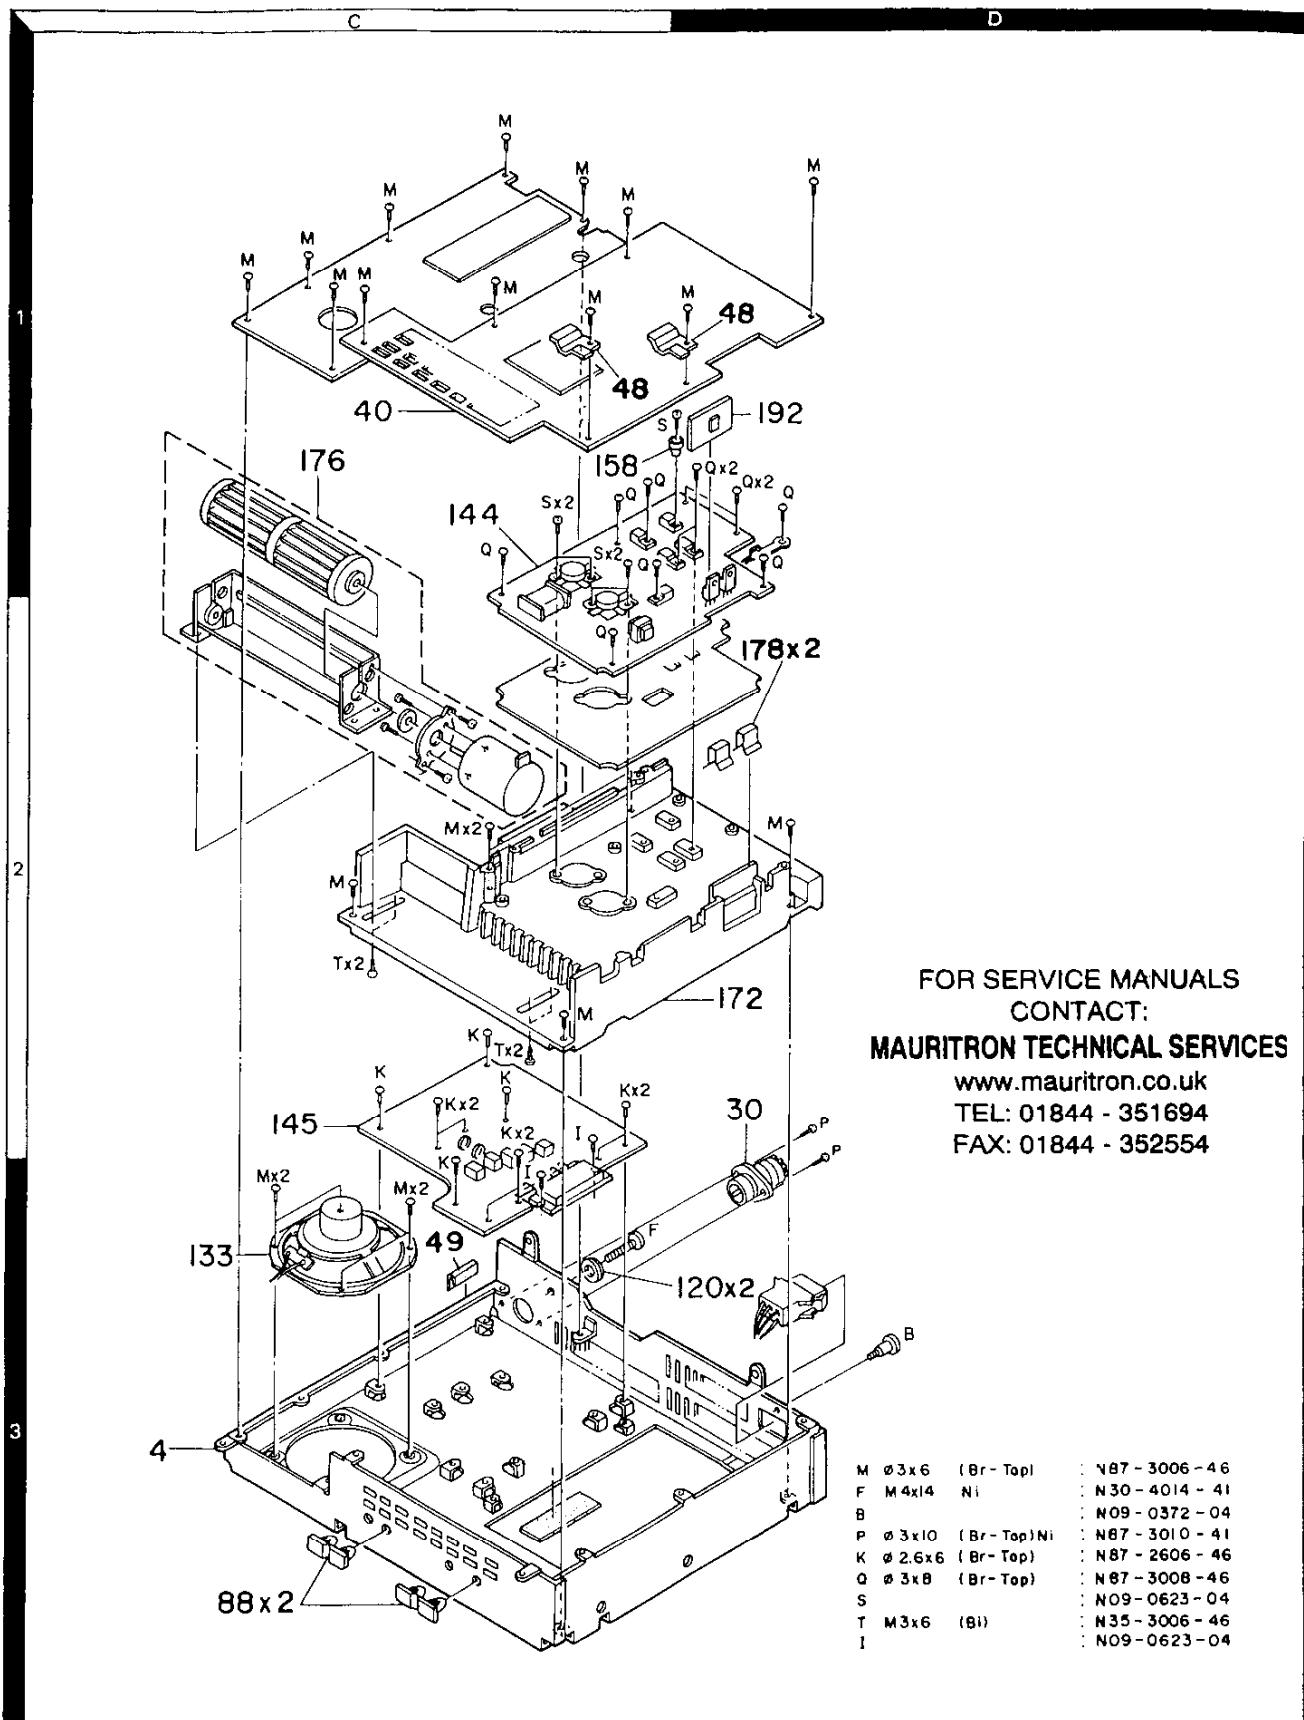TS-140S/680S**DISASSEMBLY**

DISASSEMBLY

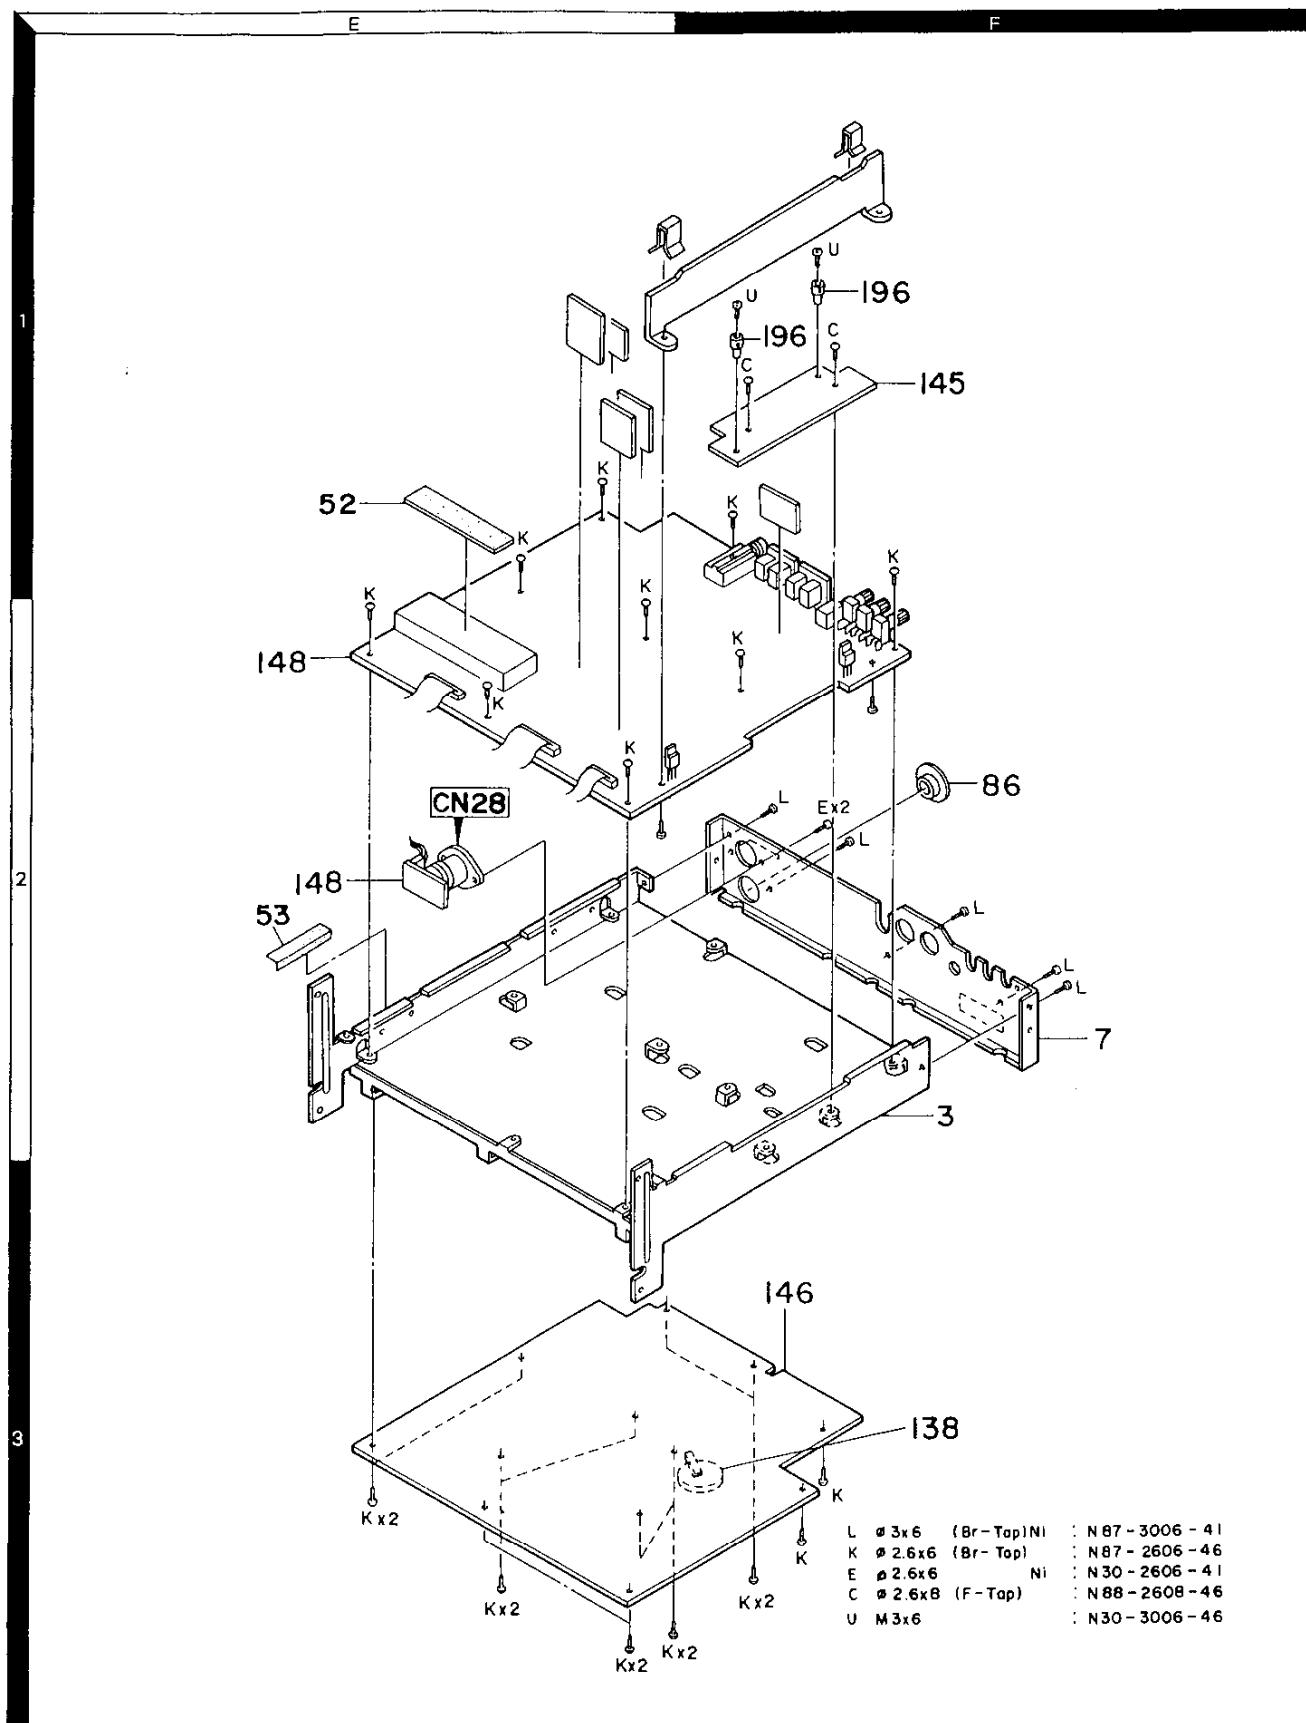

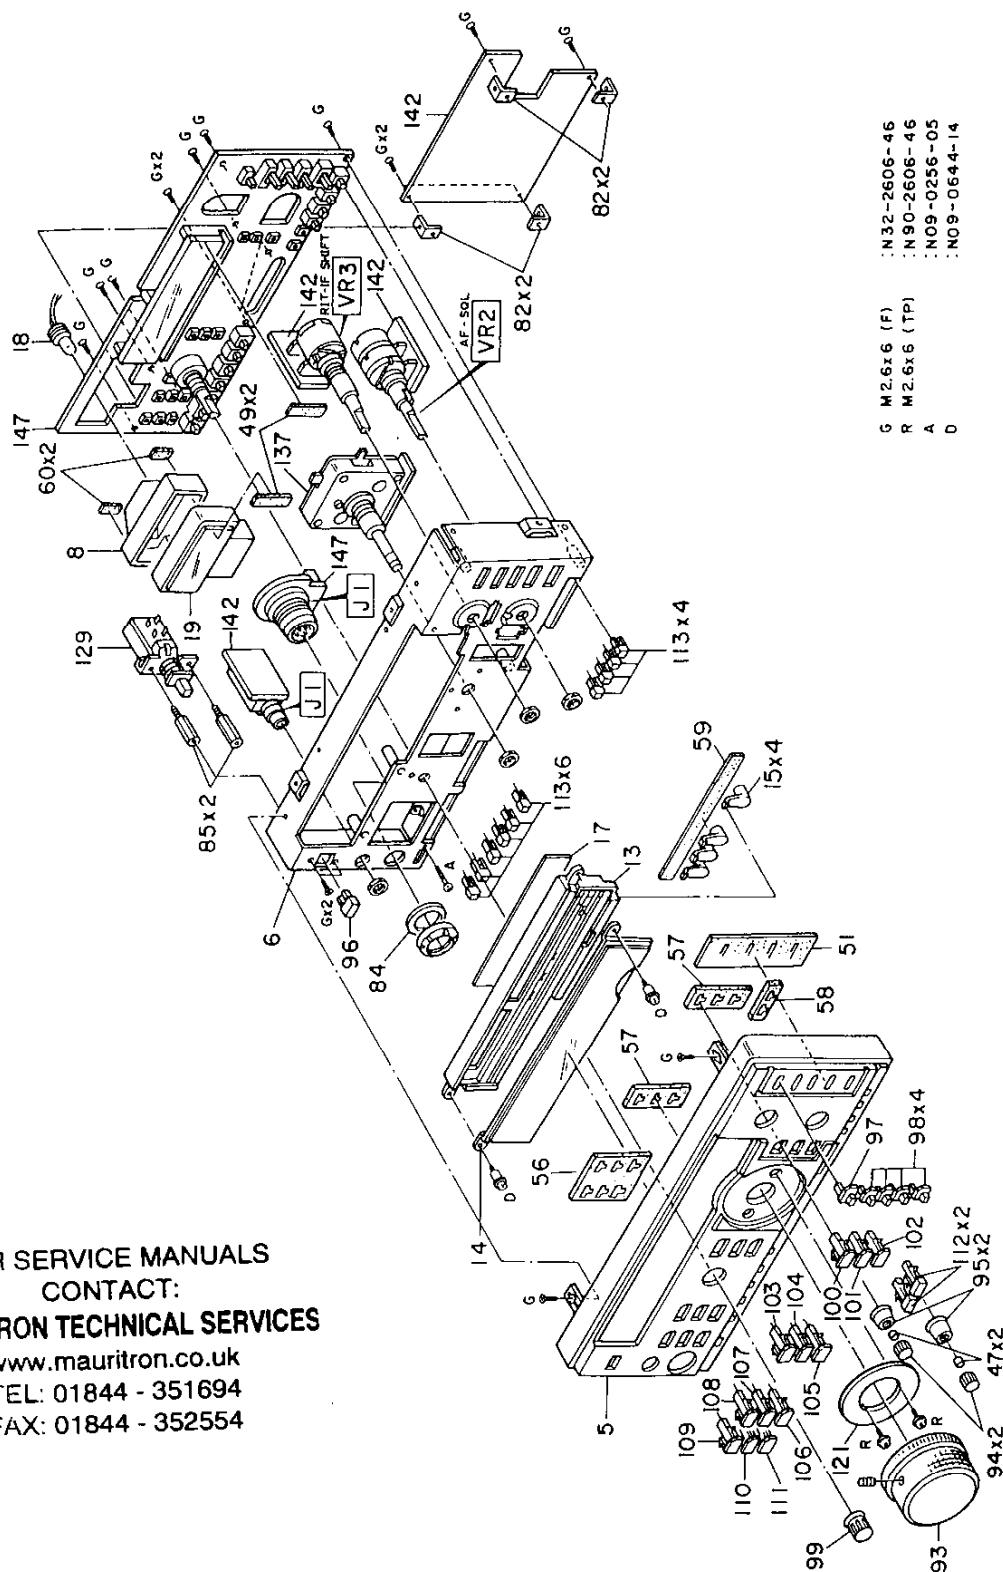TS-140S/680S**DISASSEMBLY**

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

PACKING


J

K

Accessory

Warranty card (B46-0410-20) : K
 Instruction manual (B50-8199-20)
 7P DIN plug (E07-0751-05)
 DC power cord ass'y (E30-2065-05)
 Connecting wire(CAL) (E31-2154-05)
 13P plug (E07-1351-05)
 Fuse(20A) (F05-2036-05)
 Microphone (T91-0352-15) : K, M


Carton box (H01-8146-04) : **TS-140S**
 Carton box (H01-8165-04) : **TS-680S**
 Packing fixture(FRONT) (H10-2633-02)
 Packing fixture(REAIR) (H10-2634-02)
 Cushion (H12-1315-04)
 Cushion(FRONT) (H12-1405-04)
 Protective cover (H20-1410-03)
 Protective bag(DC CORD) (H25-0112-04)
 Protective bag(MIC) (H25-0079-04) : K, M

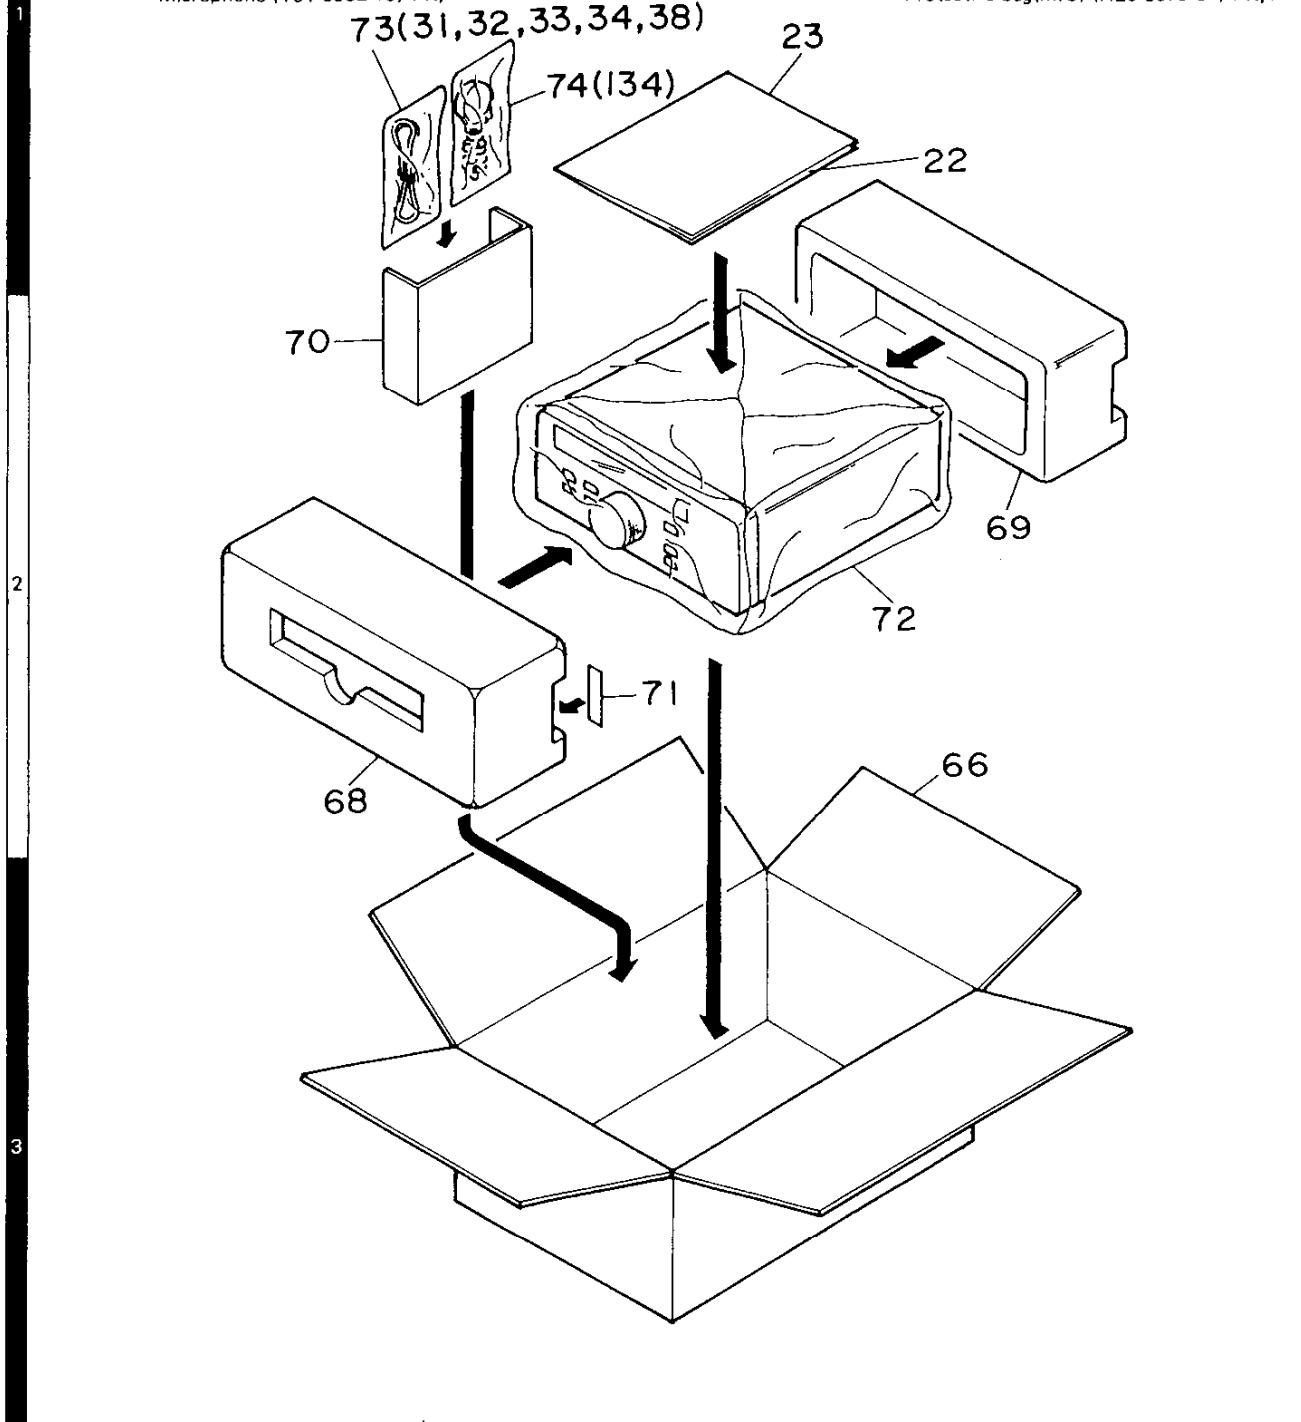

TS-140S/680S

LEVEL DIAGRAM

RX SECTION

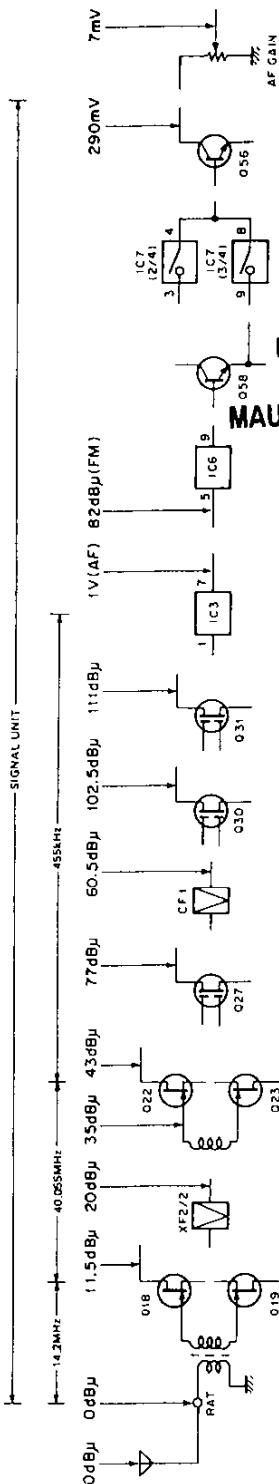

Frequency : 14.200MHz

Input : 0dB μ

AF output : 0.63V/8Ω


Note1 : The SSG signal of 14.200MHz/0dB μ is input from the ANT terminal, and the audio output of 0.63V/8Ω is obtained by adjusting the AF GAIN VR.

The SSG signal levels at various points necessary to obtain the same audio output at this time with the AF GAIN VR at a fixed position are plotted here.

Note2 : In FM mode, this signal level is used to obtain the same value as the S/N at time when 0dB μ is input.

Note3 : The SSG output is measured through a capacitor of 0.01μF.

TX SECTION

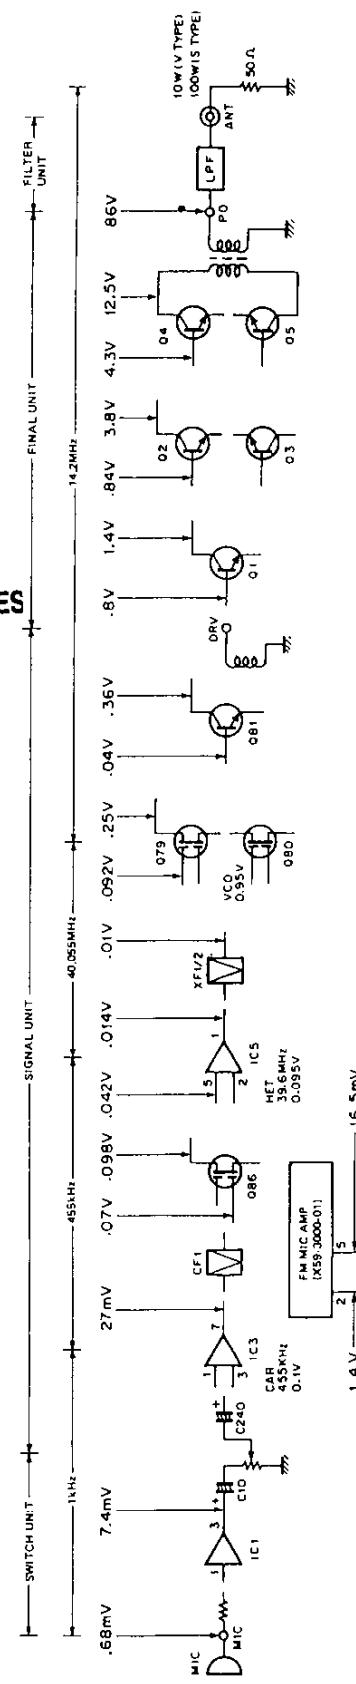

Frequency : 14.200MHz

Note1 : The high-frequency part is measured with the RF VM in the CW mode.

The low-frequency part is measured with the AF VM in the USB mode.

Note2 : The audio input voltage in the USB mode is the input for obtaining 1kHz single tone which reads almost the maximum value in the ALC zone, and that in the FM mode is the input for realizing the standard modulation (± 3 kHz DEV.).

Note3 : MIC VR is set to the maximum point.

ADJUSTMENT

REQUIRED TEST EQUIPMENT

1. DC Voltmeter (DC V.M)
 - 1) Input resistance : More than $1M\Omega$
 - 2) Voltage range : 1.5 to 1000V AC/DC

NOTE : A high-precision multimeter may be used. However, accurate readings can not be obtained for high-impedance circuits.
2. DC Ammeter
 - 1) Current range : 1.5A, 3A, 20A, High-precision ammeter may be used.
3. RF VTVM (RF V.M)
 - 1) Input impedance : $1M\Omega$ and less than 3pF, min.
 - 2) Voltage range : 10mV to 300V
 - 3) Frequency range : 10kHz to 100MHz or greater
4. AF Voltmeter (AF V.M)
 - 1) Frequency range : 50Hz to 10kHz
 - 2) Input resistance : $1M\Omega$ or greater
 - 3) Voltage range : 10mV to 30V
5. AF Generator (AG)
 - 1) Frequency range : 200Hz to 5kHz
 - 2) Output : 1mV or less to 1V, low distortion
6. AF Dummy Load
 - 1) Impedance : 8Ω
 - 2) Dissipation : 3W or greater
7. Oscilloscope (SCOPE)

Vertical amplifier which has frequency characteristics higher than 100MHz.
Requires high sensitivity, and external synchronization capability.
8. Tracking generator
 - 1) Center frequency : 50kHz to 90MHz
 - 2) Frequency deviation : Maximum ± 35 MHz
 - 3) Output voltage : 0.1V or greater
 - 4) Sweep rate : At least 0.5sec/cm
9. Standard Signal Generator (SSG)
 - 1) Frequency range : 50kHz to 500MHz
 - 2) Output : $-20dB/0.1\mu V$ to $120dB/1V$
 - 3) Output impedance : 50Ω
 - 4) AM and FM modulation can be possible.

NOTE : Generator must be frequency stable.
10. Frequency Counter (FREQ.C)
 - 1) Minimum input voltage : 50mV
 - 2) Frequency range : 500MHz or greater
 - 3) Output impedance : 50Ω
11. Noise Generator


Must generate ignition noise containing harmonics beyond 30MHz.
12. RF Dummy Load
 - 1) Impedance : 150Ω
 - 2) Dissipation : 150W or greater
13. Power Meter
 - 1) Impedance : 50Ω
 - 2) Dissipation : 150W continuous or greater
 - 3) Frequency limits : 60MHz or greater

14. Spectrum Analyzer (SPE-ANA)

- 1) Frequency range : 100kHz to 500MHz or greater
- 2) Bandwidth : 1kHz to 3MHz

15. Detector

- 1) For adjustment of PLL/VCO BPF



16. Directional Coupler

17. Power

- PS-430, PS-50 (S Type)
PS-21 (V Type)

18. Microphone

MC-60S8 or MC-42S

PREPARATION

Unless otherwise specified, set the controls as follows :

POWER	ON	PROC	OFF
BAND	14	ALC/PWR	PWR
AF	MIN	ATT	OFF
SQL	MIN	AGC	SLOW
IF SHIFT	CENTER	VOX (TS-140S)	OFF
CW	OFF	RF AMP (TS-680S)	OFF
PWR	MIN	1MHz	OFF
MIC	MIN	RIT	OFF
RF GAIN	MAX	NB 1	OFF
NB LEVEL	MIN	NB 2	OFF
F. LOCK	OFF	VFO A/B	A
SEND/REC	REC	SPLIT	OFF

FOR SERVICE MANUALS


CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

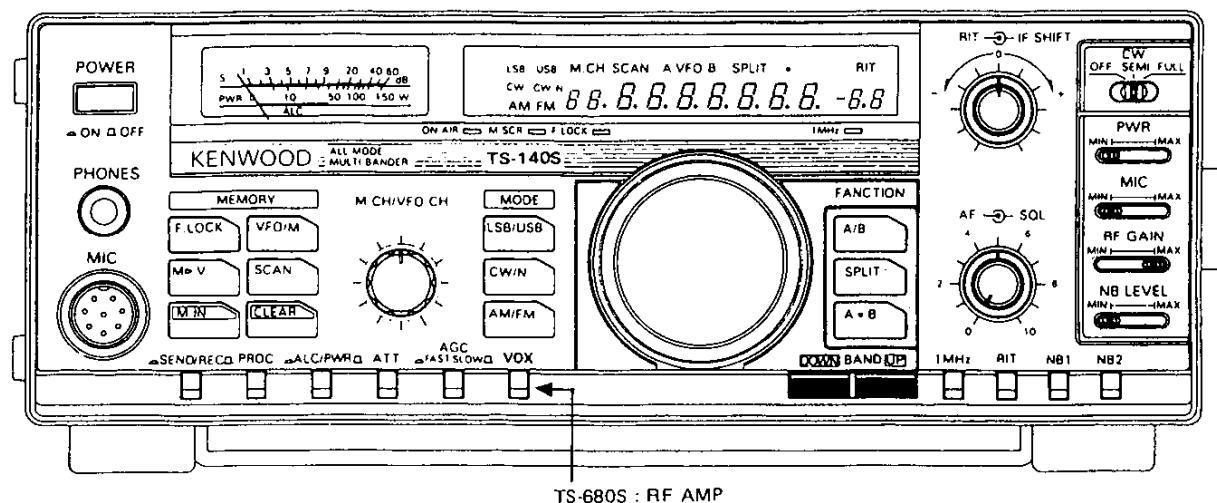TS-140S/680S**ADJUSTMENT****RESET**

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. Reset	1) Set the power SW ON, while depressing the A=B key.							A VFO 14.000.0 MODE : USB

VOLTAGE CHECK


Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. Voltage	<p>1) DC V.M. Signal (8)-4 13.8V 13.1 ~ 14.3V</p> <p>2) SEND/REC SW : SEND 8V(Silk) 7.7V 7.2 ~ 8.0V</p> <p>3) SEND/REC SW : REC TXB(Silk) 7.5V 7.0 ~ 8.0V</p> <p>4) MODE : FM RXB(Silk) 7.5V 7.0 ~ 8.0V</p> <p>5) MODE : AM FMB(Silk) 6.5 ~ 8.0V</p> <p>6) MODE : CWN AMB(Silk) 6.5 ~ 8.0V</p> <p>7) MODE : CW CWN(Silk) 6.5 ~ 8.0V</p> <p>8) MODE : USB CWB(Silk) 6.5 ~ 8.0V</p> <p>9) DC V.M. Signal (12)-1 5V 4.5 ~ 5.5V</p>	O TOB L79 OSSB CWBO AMBO FMBO CWNO BV O OTXB	OTOB OSSB CWBO AMBO FMBO CWNO BV O OTXB	CN3				
2. RFG voltage	1) RF GAIN VR : MAX	Signal RXB (Silk)	Signal VR22	3.1V				3.05 ~ 3.15V

TS-140S/680S

ADJUSTMENT**PLL ADJUSTMENT**

Item	Condition	Measurement			Adjustment			Specifications/ Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. Reference frequency	1)	f. counter	Ctrl	TP5 (R77)	Ctrl	TC1	36.000000MHz	± 10Hz
2. VCO-4	1)	DC V.M		TP8 (L53)		L54	5.0V	4.8 ~ 5.2V
3. VCO-3	1) FREQ. : 14.000.00 MODE : AM	f. counter		TP1 (L2)		L3	2.4V	2.3 ~ 2.5V
	2) FREQ. : 14.000.00 MODE : USB IF SHIFT VR : Center Control unit VR4 : CW MAX		(1)-1			VR2	455.700kHz	± 5Hz
	3) IF SHIFT VR : CW MAX						Check	457.250kHz or more.
	4) IF SHIFT VR : CCW MAX							454.125kHz or less.
	5) IF SHIFT VR : Center Control unit VR4 : Center							
4. VCO-2	1) FREQ. : 13.999.90 MODE : AM	DC V.M		TP2 (L11)		L12	1.2V	1.1 ~ 1.3V
	2) FREQ. : 14.000.00 MODE : AM						Check	3.1 ~ 3.7V
5. VCO-2 BPF	1) FREQ. : 14.025.00 MODE : AM	Oscillo-scope		TP3 (R51)	L17~L19	Repeat 2 ~ 3 times. Level MAX.	1.4V/p-p or more. (Ref. level : 1.75V/p-p)	
	2) FREQ. : 10.025.00 MODE : AM			TP4 (W2)	L28, L29		0.3V/p-p or more. (Ref. level : 0.4V/p-p)	
	3) FREQ. : 24.525.00 MODE : AM			TP6 (R100)	L30~L32		120mV/p-p or more. (Ref. level : 150mV/p-p)	
					L32, L42~L44		80mV/p-p or more. (Ref. level : 100mV/p-p)	
					L39~L41			
6. VCO-1	1) FREQ. : 59.999.90 MODE : AM TS-680S only.	DC V.M	Signal	(6)-2	Signal	L74	2.0V	1.9 ~ 2.1V
	2) FREQ. : 45.000.00 MODE : AM TS-680S only.						Check	5.0 ~ 6.0V
	3) FREQ. : 34.999.90 MODE : AM					L72	6.0V	5.9 ~ 6.1V
	4) FREQ. : 21.500.00 MODE : AM						Check	2.0 ~ 3.0V
	5) FREQ. : 21.499.90 MODE : AM					L70	2.0V	1.9 ~ 2.1V
	6) FREQ. : 10.500.00 MODE : AM						Check	5.0 ~ 6.0V
	7) FREQ. : 10.499.90 MODE : AM	FOR SERVICE MANUALS CONTACT: MAURITRON TECHNICAL SERVICES www.mauritron.co.uk TEL: 01844 - 351694 FAX: 01844 - 352554				L68	2.0V	1.9 ~ 2.1V
	8) FREQ. : 50.00						Check	5.5 ~ 6.5V

TS-140S/680S**ADJUSTMENT****RX ADJUSTMENT**

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. RX AMP.	1) FREQ. : 14.175.00 MODE : USB SSG output : Optional output from 10dB μ to -6dB μ	SSG AF V.M Oscillo- scope 8Ω dummy load	EXT.SP	Signal	L52~ L55, L57,59 L60,64 L65,89	Adjust from L52 to L89.	MAX. AF output.	
	2) SSG output : -6dB μ				L52~ L55	Repear 2 ~ 3 times.	MAX. AF output.	
2. FM AMP.	1) FREQ. : 28.800.00 MODE : FM SSG output : 30dB μ (MOD : 1kHz, DEV : ±3kHz)				L86	MAX. AF output.	No distortion in AF waveform.	
3. 1st MIX balance	1) FREQ. : 100.00 MODE : USB SSG output : OFF				VR1	MIN. AF noise output.		
4. 2nd MIX balance	1) FREQ. : 14.175.00 MODE : USB SSG output : OFF				VR2	MAX. AF noise output.		
5-1. IF trap	1) FREQ. : 29MHz MODE : USB SSG output : 60dB μ ~80dB μ SSG FREQ. : 40.055MHz				L1,46	1) MIN. AF output at 60dB μ of SSG output. 2) Readjust to MIN. AF output at 80dB μ of SSG output.	50dB or more.	
5-2. IF trap TS-140S W type only	1) FREQ. : 11.800.00 MODE : USB SSG output : 0dB	TC1 → TC2 → 			TC2	MIN. AF output.		
	2) FREQ. : 15.200.00				TC1	MIN. AF output. Repeat 2 ~ 3 times.		
6. RF AMP. TS-680S only.	1) FREQ. : 28.800.00 MODE : USB SSG output : -10dB μ RF AMP SW : ON				L37	MAX. AF output.		
	2) FREQ. : 50.500.00				L42			
	3) RF AMP SW : OFF							
7. S-meter	1) FREQ. : 14.175.00 MODE : USB AGC SW : FAST	FOR SERVICE MANUALS CONTACT: MAURITRON TECHNICAL SERVICES www.mauritron.co.uk TEL: 01844 - 351694 FAX: 01844 - 352554			VR26	Set to starting point. (Meter zero)		
	• φ point SSG output : OFF				VR3	S-meter "1".		
	• S1 SSG output : 6dB μ				VR10	S-meter "9".		
	• S9 SSG output : 32dB μ					Check	6dB μ ± 3dB μ	
	• S1 check SSG output : 6dB μ				VR11	S-meter "9".		
	• VHF S-meter (TS-680S only) FREQ. : 50.500.00 MODE : USB SSG output : 32dB μ				VR12	S-meter "9 + 20".		
	• FM meter FREQ. : 28.800.00 MODE : FM SSG output : 30dB μ (MOD : OFF) RF AMP SW : OFF (TS-680S only)							

TS-140S/680S

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications/Remarks	
		Test-equipment	Unit	Terminal	Unit	Parts	Method		
8. RIT	1) Set the Power SW ON, while depressing the CLEAR key.			Display		Check	Display of 10Hz is displayed.		
	2) FREQ. : 14.000.00 MQDE : USB RIT VR : Center RIT SW : ON					Ctrl	VR1		
	3) RIT VR : CW MAX					Set display to MAIN 14.000.00 RIT 0.0			
	4) RIT VR : CCW MAX					Check			
	5) RIT VR : Center RIT SW : OFF					Check			
9. NB	1) FREQ. : 14.200.00 MODE : USB SSG output: 30dB μ NB1 SW : ON	SSG DC V.M	Signal	L83	Signal	L84,85	MIN. voltage.	The same effect as NB1 is obtained.	
	2) Connect the noise generator to the ANT terminal.	Noise generator		S-meter			Check		
	3) NB1 SW : OFF NB2 SW : ON								
	4) Disconnect the noise generator from the ANT terminal. NB2 SW : OFF								


TX ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. TX AMP	1) FREQ. : 50.200.00 (TS-680S) FREQ. : 21.200.00 (TS-140S) MODE : CW Signal unit VR19 : Center CW SW : FULL SEND/REC SW : SEND	Spectrum analyzer	Signal	DRV	Signal	L89,95 L113 VR20	Adjust CAR VR to level no to be saturated, and MAX. output.	MAX. output. (Ref. level : 13dBm or more)
	2) SEND/REC SW : REC							
2. 455kHz spurious	1) FREQ. : 50.200.00 (TS-680S) FREQ. : 21.200.00 (TS-140S) SEND/REC SW : SEND				L53	MIN. Spurious level of 455kHz.		
	2) After adjustment, reconnected DRV. SEND/REC SW : REC							
3. Base current	1) FREQ. : 14.200.00 MODE : USB MIC VR : MIN PWR VR : MIN Final unit VR1, 2 : CCW MAX SEND/REC SW : SEND	Ammeter		DC cord	Final	VR1	1) Record current before adjusting VR1 and VR2. 2) Adjust VR1 for an increase for +250mA.	250mA ± 50mA. (Total current : 1.7 ~ 1.8A)
	Power					VR2	Adjust VR2 so that the current is increase of above item 2) 250mA.	500mA ± 50mA. (Total current : 1.95 ~ 2.05A)
	2) SEND/REC SW : REC							

TS-140S/680S**ADJUSTMENT**




Item	Condition	Measurement			Adjustment			Specifications/Remarks	
		Test-equipment	Unit	Terminal	Unit	Parts	Method		
4. Power	• CW 1) FREQ. : 14.200.00 MODE : CW PWR VR : MAX 	Power meter	Rear	ANT	Signal	VR17	95W	±5W	
	2) SEND/REC SW : REC								
	• FM 3) FREQ. : 29.700.00 MODE : FM Filter unit VR1 : Center PWR VR : MAX Signal unit S2 : HI SEND/REC SW : SEND					VR14	50W		
	4) SEND/REC SW : REC								
	• SSB 5) FREQ. : 14.200.00 MODE : USB PWR VR : MAX MIC VR : Center Display unit VR5 : CCW MAX MIC input: 1kHz, 5mV SEND/REC SW : SEND					VR13	100W	±5W	
	6) SEND/REC SW : REC								
	• 50MHz (TS-680S only) 7) FREQ. : 51.200.00 MODE : CW PWR VR : Center Signal unit VR15 : CW MAX SEND/REC SW : SEND		Filter	TC1	Adjust PWR VR to set output about 10W. MAX. output at TC1.				
	8) PWR VR : MAX 9) SEND/REC SW : REC				VR15	11W	±0.5W		
	• MIN. POWER 10) FREQ. : 51.200.00 (TS-680S) FREQ. : 29.700.00 (TS-140S) MODE : FM PWR VR : MIN SEND/REC SW : SEND								
	11) SEND/REC SW : REC PWR VR : MAX				VR18	1W (TS-680S) 5W (TS-140S)			
	5. NULL	Power meter DC V.M.	Signal	VSR (13) -2	Filter	TC2		MIN	
	1) FREQ. : 3.700.00 MODE : CW SEND/REC SW : SEND								
6. Protection	2) SEND/REC SW : REC								
	1) FREQ. : 14.200.00 MODE : CW SEND/REC SW : SEND	Power meter 150Ω dummy load	Rear	ANT	Signal	VR16		30W	
	2) SEND/REC SW : REC								

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

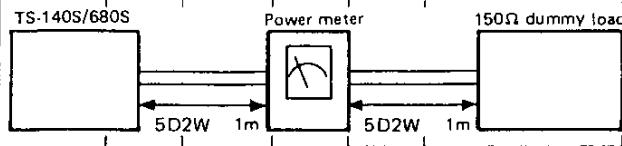

TS-140S/680S

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
7. Power meter	1) FREQ. : 14.200.00 MODE : CW ALC/PWR SW : PWR SEND/REC SW : SEND	Power meter	Rear	ANT	Signal	VR25	Adjust to 90W by CAR VR.	RF meter : 90W
	2) SEND/REC SW : REC							
8. ALC meter	1) FREQ. : 14.200.00 MODE : USB PWR VR : MAX MIC VR : MAX ALC/PWR SW : ALC Filter unit VR5 : Center	Power meter AG AF V.M.		ALC meter	Signal	VR8	Adjust to the "0" of ALC meter reading.	
	• φ point							
	2) SEND/REC SW : SEND							
	3) SEND/REC SW : REC							
	• Start point					VR9	Adjust to the "0" of ALC meter reading by MIC VR.	
	4) MIC input : 1kHz, 1.5mV SEND/REC SW : SEND							
	5) SEND/REC SW : REC							
	• MAX						Adjust ALC meter MAX. within ALC zone.	
9-1. Spurious TS-680S only.	• 50MHz 1) FREQ. : 50.200.00 MODE : CW PWR VR : MAX SEND/REC SW : SEND	Power meter Spectrum analyzer	Rear	ANT	Signal	VR19	Adjust as shown at right. (MIN. spurious of A and B.)	(60dB or less)
	2) SEND/REC SW : REC							
	• 21MHz 3) FREQ. : 21.200.00 SEND/REC SW : SEND					L97	Adjust as shown at right. (MIN. spurious of C.)	
	2) SEND/REC SW : REC							
	1) FREQ. : 21.200.00 MODE : CW PWR VR : MAX SEND/REC SW : SEND					VR19 L97	1) Adjust L97 to MIN. spurious of A. 2) Adjust VR19 to MIN. spurious of B.	
	2) SEND/REC SW : REC							
9-2. Spurious TS-140S only.	1) FREQ. : 21.200.00 MODE : CW PWR VR : MAX SEND/REC SW : SEND						(45dB or less)	
	2) SEND/REC SW : REC							

TS-140S/680S**ADJUSTMENT**


Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
10. CAR suppression	1) FREQ. : 14.200.00 MODE : USB or LSB MIC VR : MIN SEND/REC SW : SEND	Power meter Oscillo-scope or Spectrum analyzer	Rear	ANT	Signal	VR4 VR5	MIN. Adjust for no difference between USB and LSB.	-40dB or less.
	2) SEND/REC SW : REC							
11. TX frequency response	1) FREQ. : 14.200.00 MODE : USB or LSB AG output : 2 tone, 5mV 300Hz, 2600Hz SEND/REC SW : SEND MIC VR : ALC meter "0"	Power meter Oscillo-scope or Spectrum analyzer AG	Ctrl	VR3 (LSB) VR4 (USB)	Adjust as shown at right.			  
	2) SEND/REC SW : REC							
12. Processor	1) FREQ. : 14.200.00 MODE : USB PROC SW : ON ALC/PWR SW : ALC AG output : 1kHz, 10mV SEND/REC SW : SEND	Power meter AG AF V.M			Adjust for ALC zone MAX. with MIC GAIN VR.			
	2) AG output : 20dB down							
	3) SEND/REC SW : REC							
13. FM DEV	1) FREQ. : 28.700.00 MODE : FM MIC input : 1kHz, 30mV SEND/REC SW : SEND	Power meter AG AF V.M		Signal	VR24 4.6kHz	±0.1kHz		
	2) MIC input : 1kHz, 3mV							
	3) SEND/REC SW : REC							
14. Side tone monitor level	1) FREQ. : 14.200.00 MODE : CW AF VR : Center Signal unit VR7 : CW MAX CW SW : SEMI Connect the KEY to the KEY jack.	Power meter AF V.M Oscillo-scope 8Ω dummy load	EXT.SP	VR21 0.25V/8Ω	±0.05V			
	2) Disconnect the KEY from the KEY jack. CW SW : OFF							
15. Beep sound	1) Depress the LSB/USB key continuously.			VR23	Check	200 ~ 400mV.		

**FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES**
www.mauritron.co.uk
 TEL: 01844 - 351694
 FAX: 01844 - 352554

ADJUSTMENT


ADJUSTMENT POINT (Bottom view)

- CONTROL UNIT

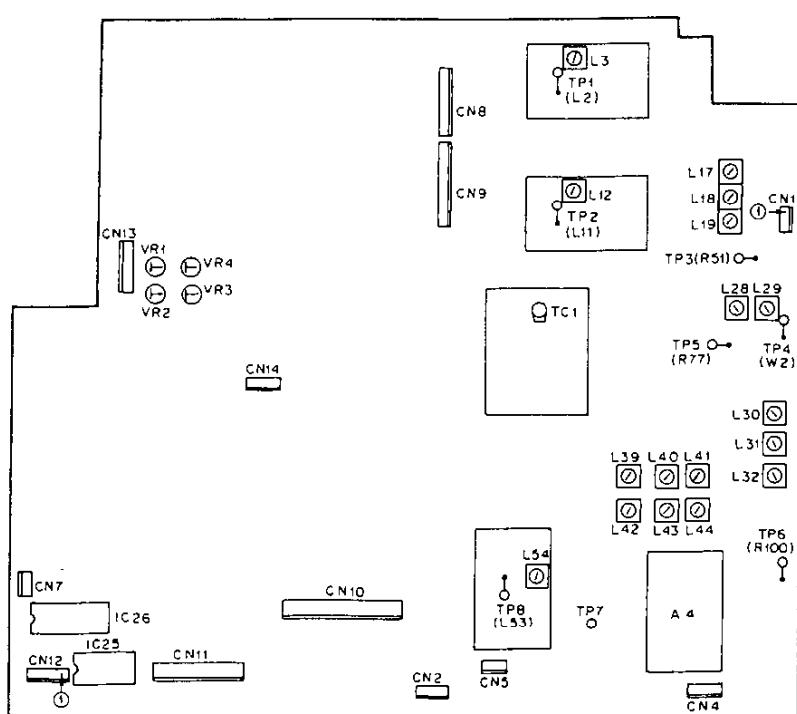


(Top view)


- FINAL UNIT

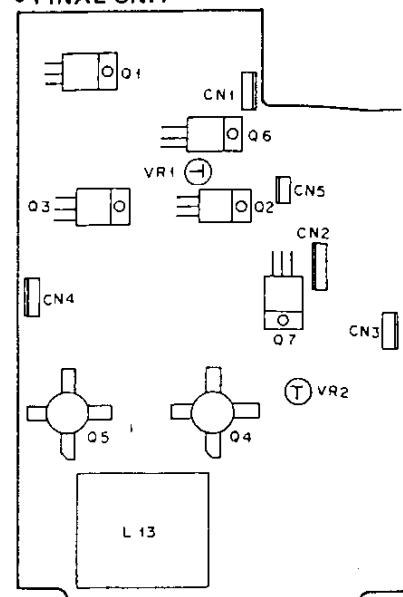

- DISPLAY UNIT

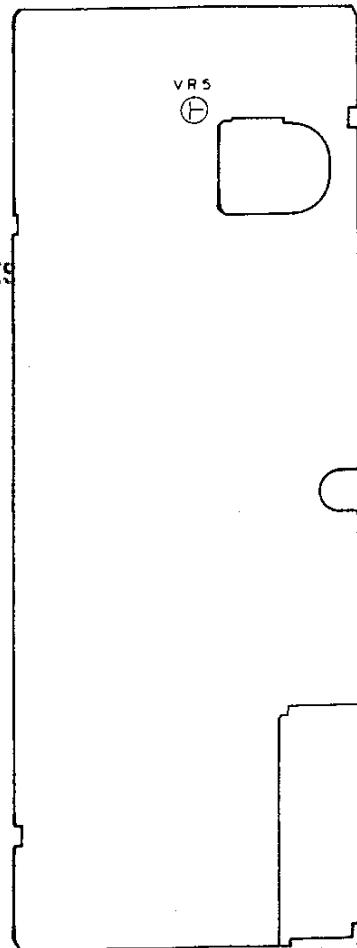


- FILTER UNIT

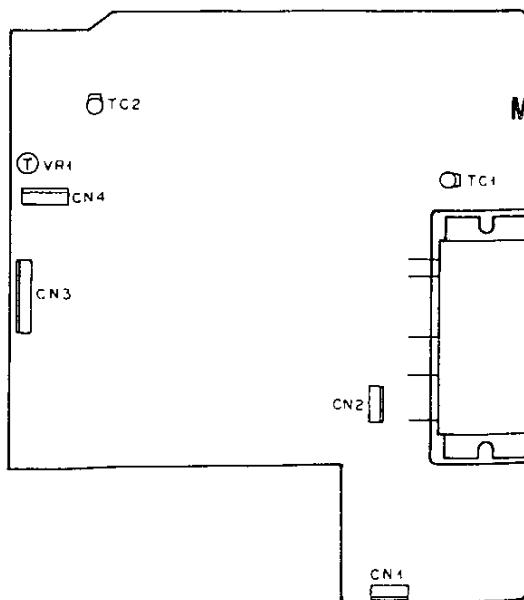



**FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES**

www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

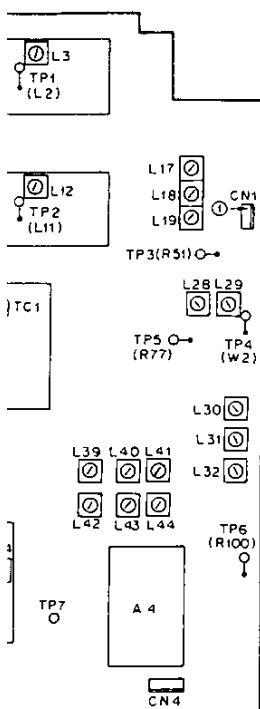
TS-140S/680S TS-140S/680S**DJUSTMENT**

(Top view)


• FINAL UNIT

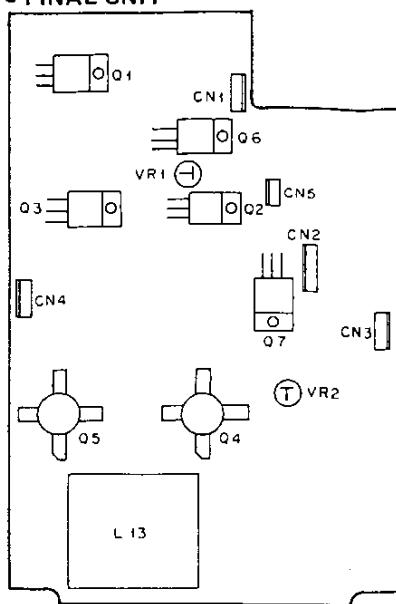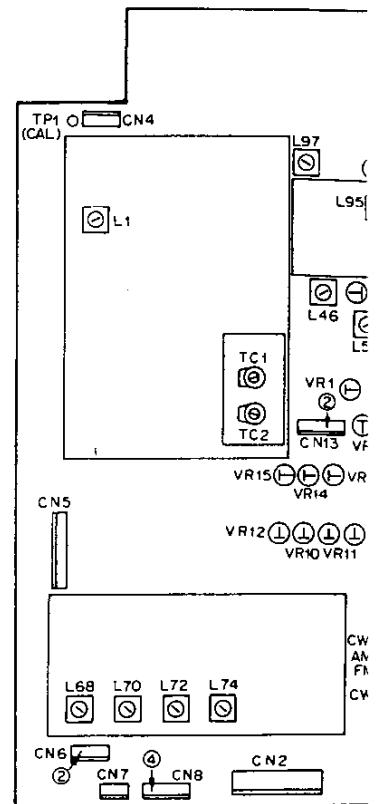• SIGNAL UNIT
(TS-140S)

• DISPLAY UNIT

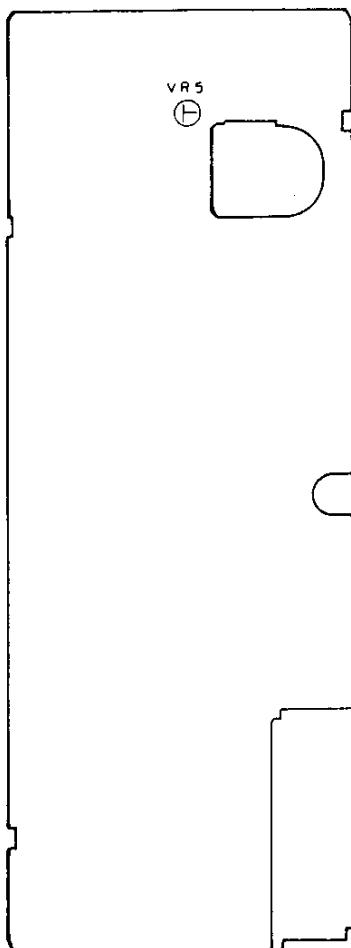

(TS-680S)

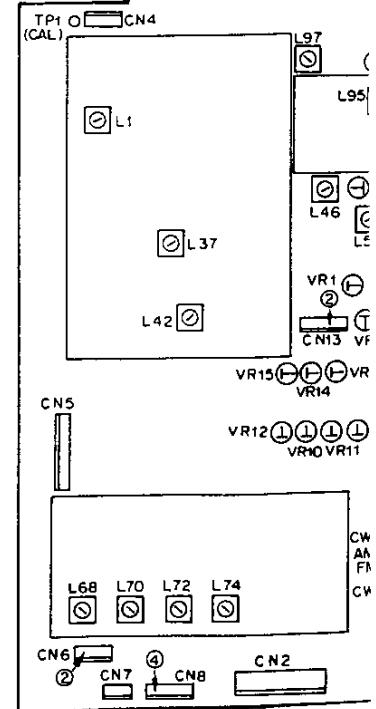

OS TS-140S/680S


FOR SERVICE MANUALS
CONTACT:
MAURITRON SERVICES

www.mauritron.co.uk


TEL: 01844 - 351694

FAX: 01844 - 352554

• SIGNAL UNIT
(TS-140S)

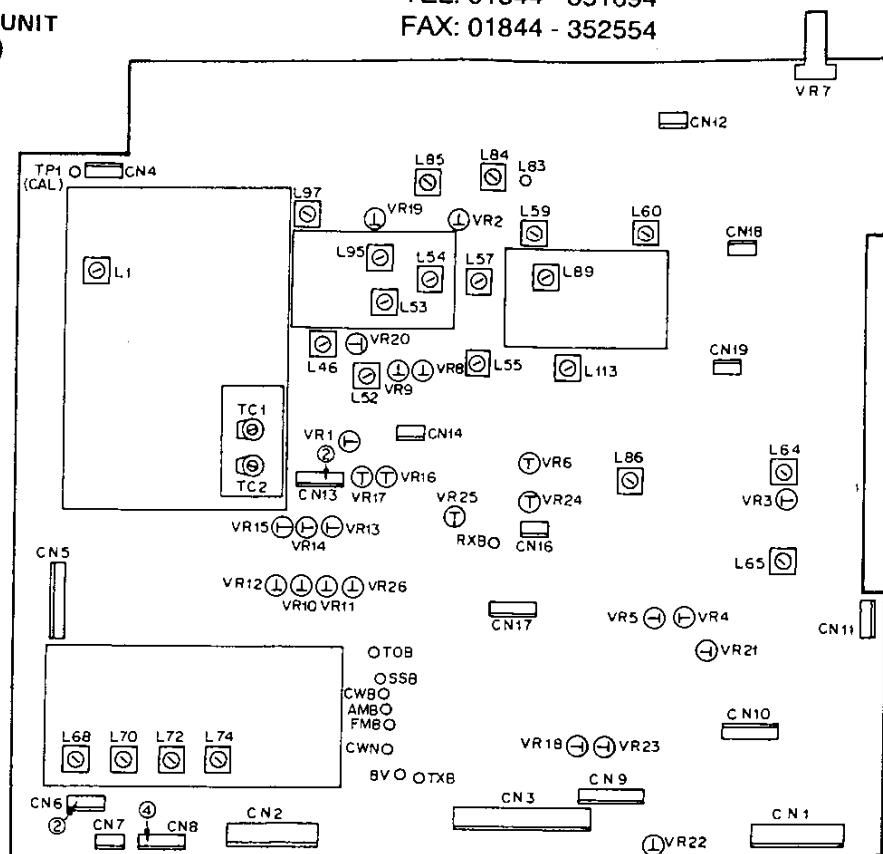



(TS-680S)

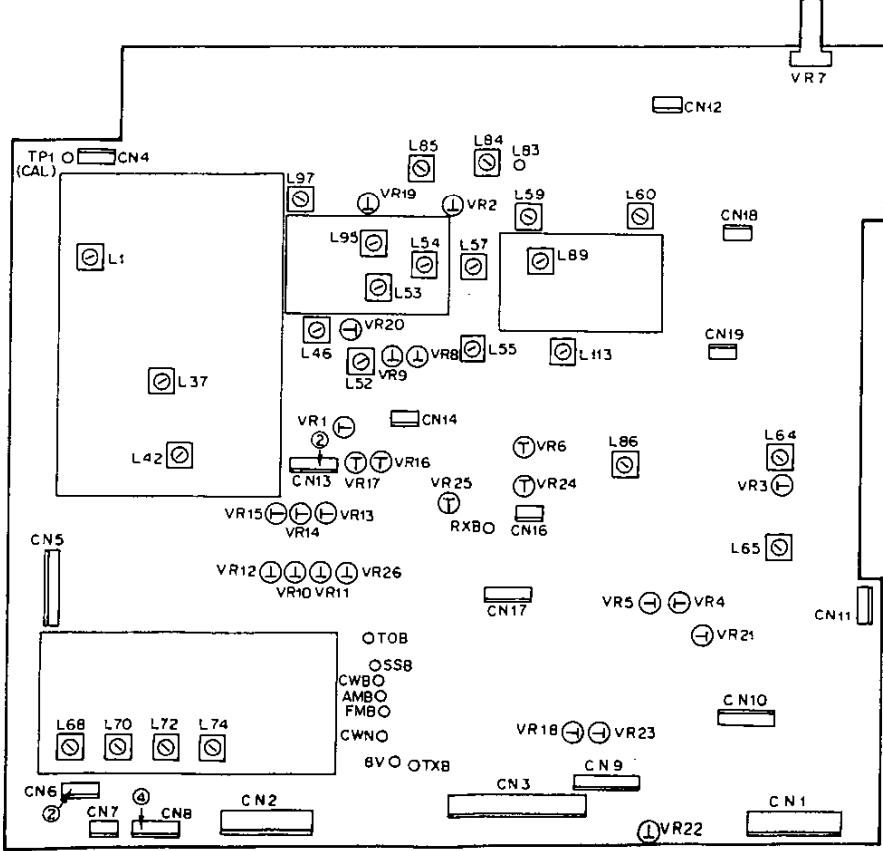


IS-140S/680

BLOCK DI

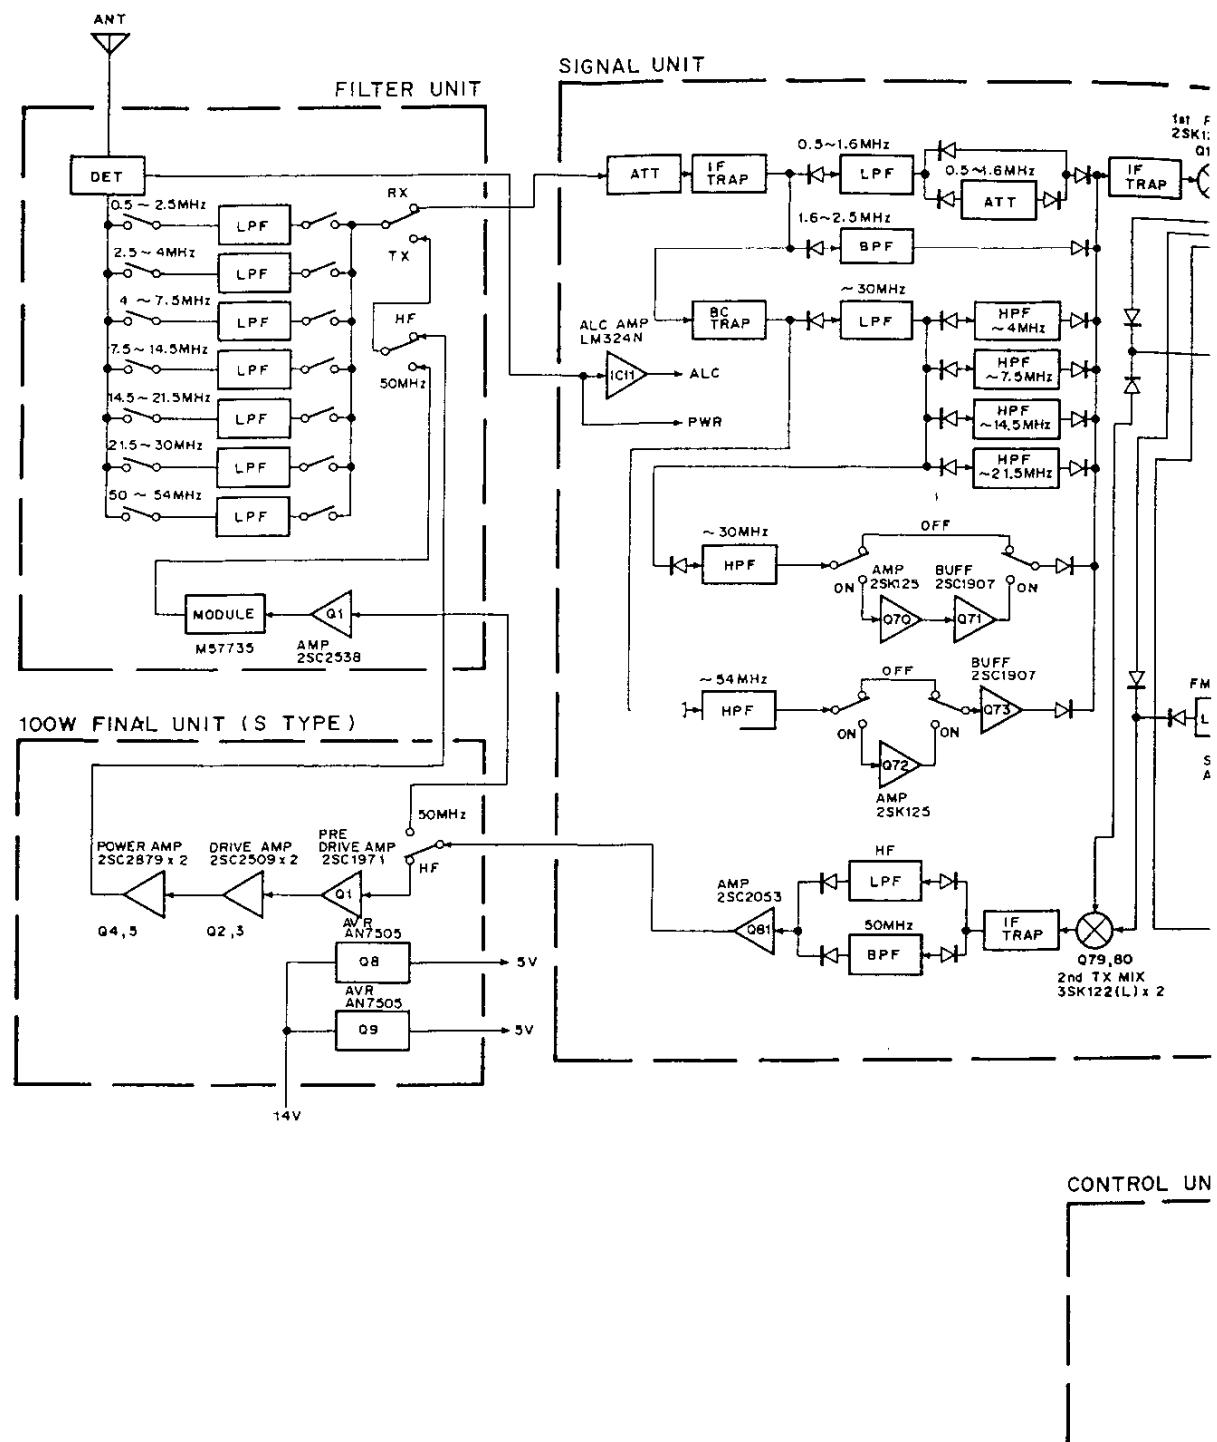

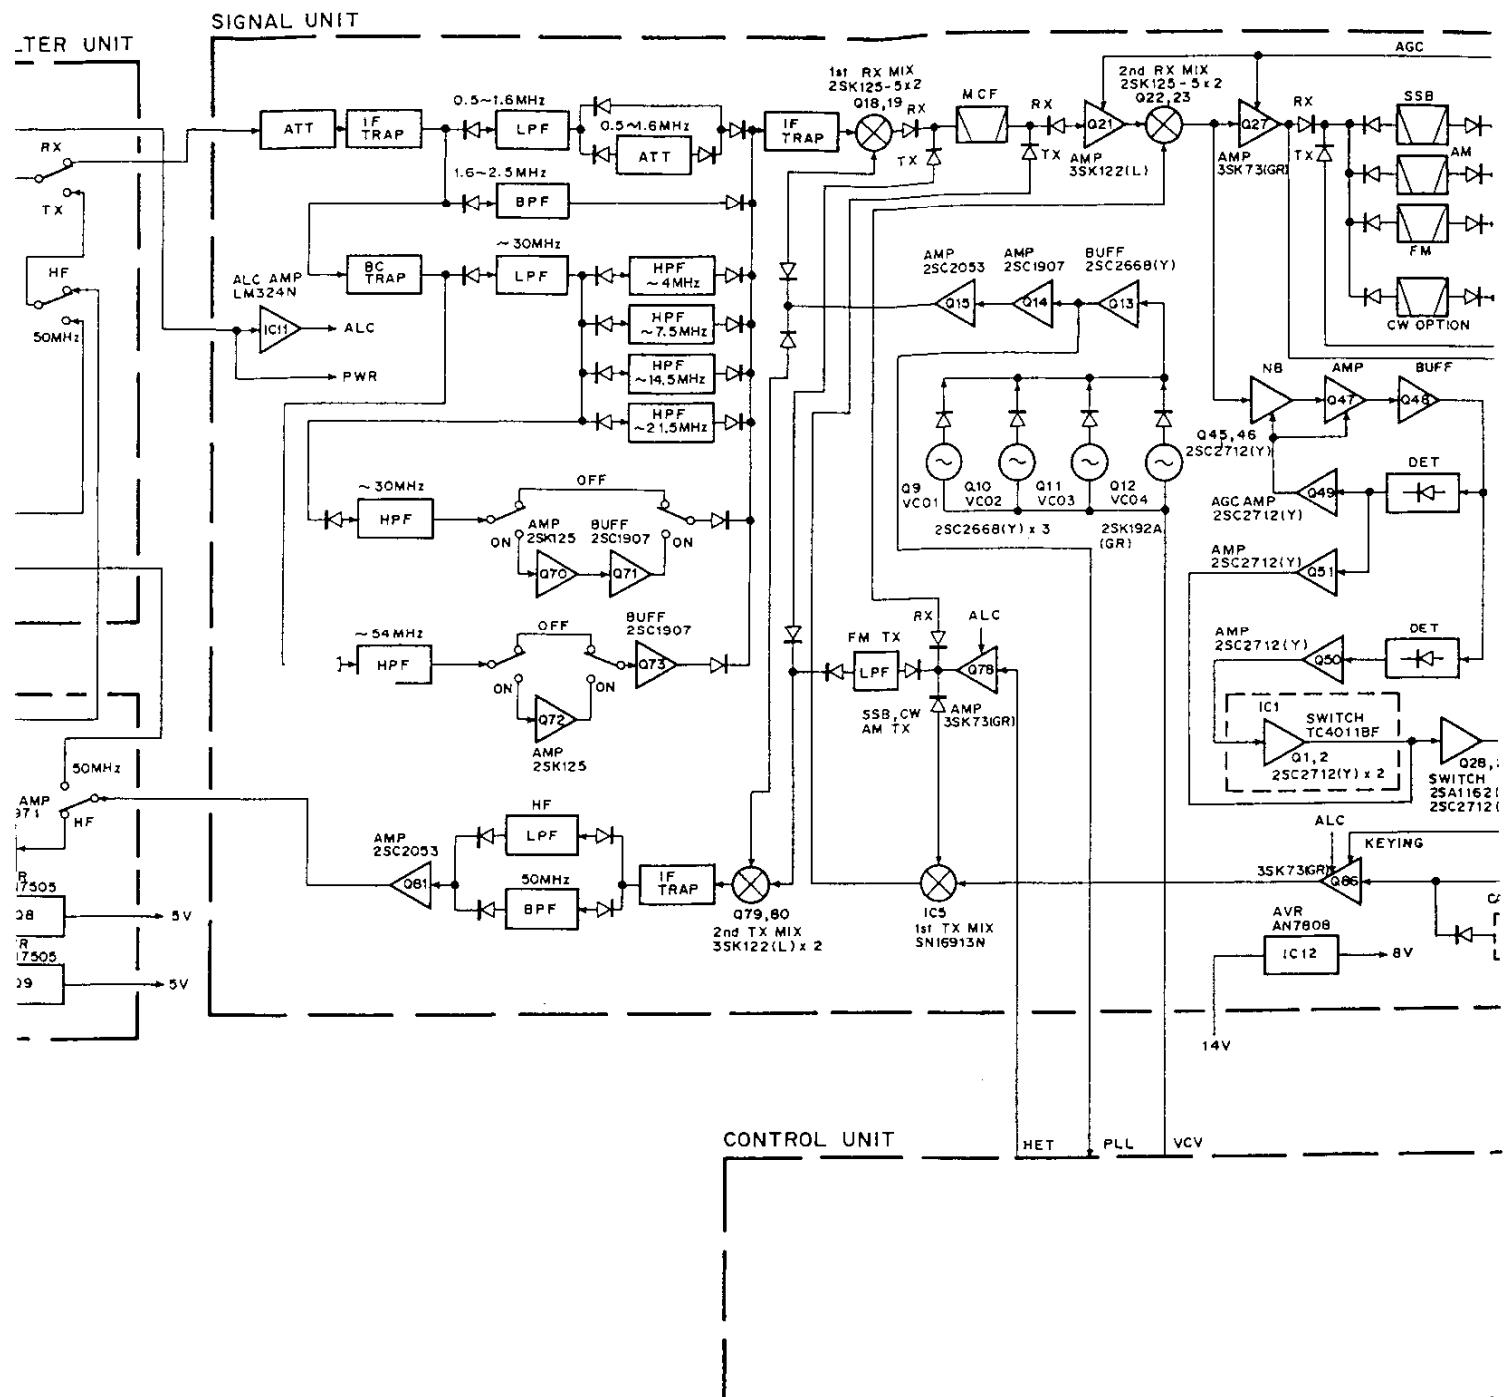TS-140S/680S TS-140S/600S**BLOCK DIAGRAM (TS-680S)**

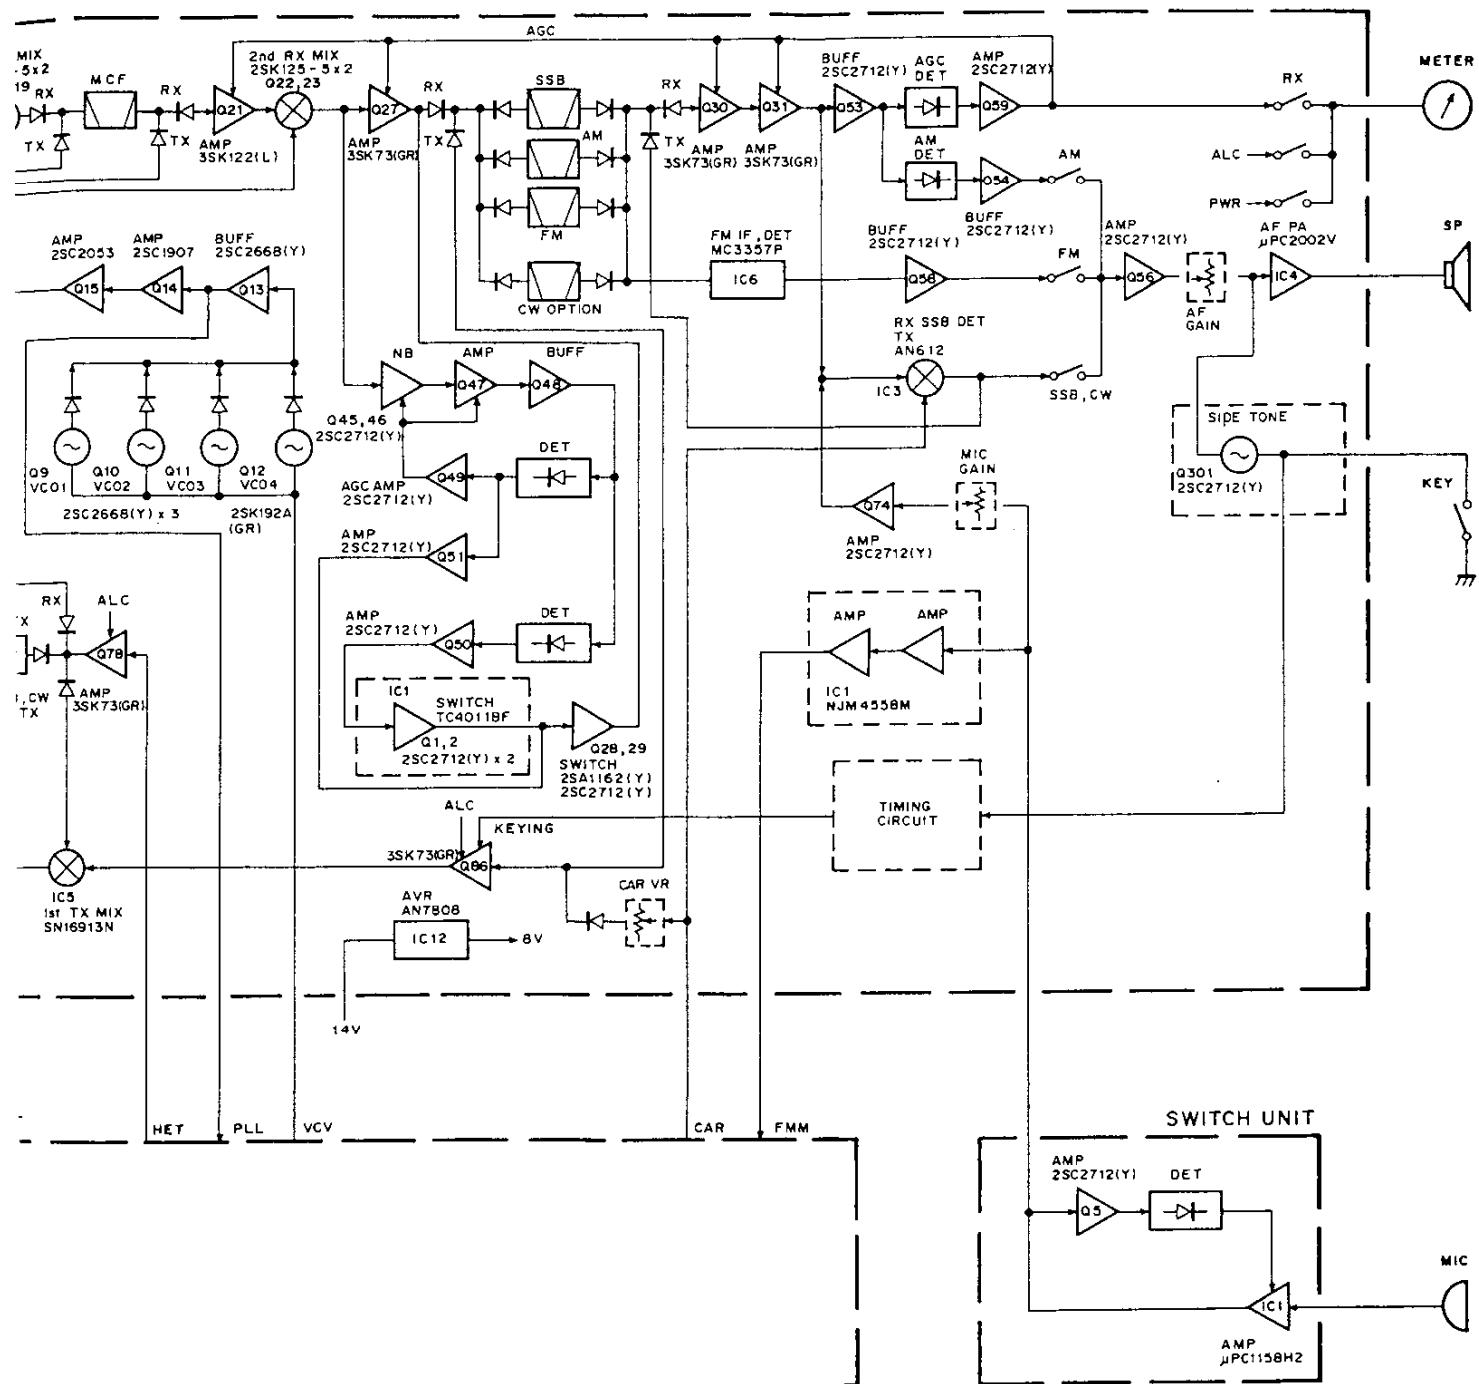S TS-140S/680S**GRAM (TS-680S)**

FOR SERVICE MANUALS


CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk


TEL: 01844 - 351694

FAX: 01844 - 352554

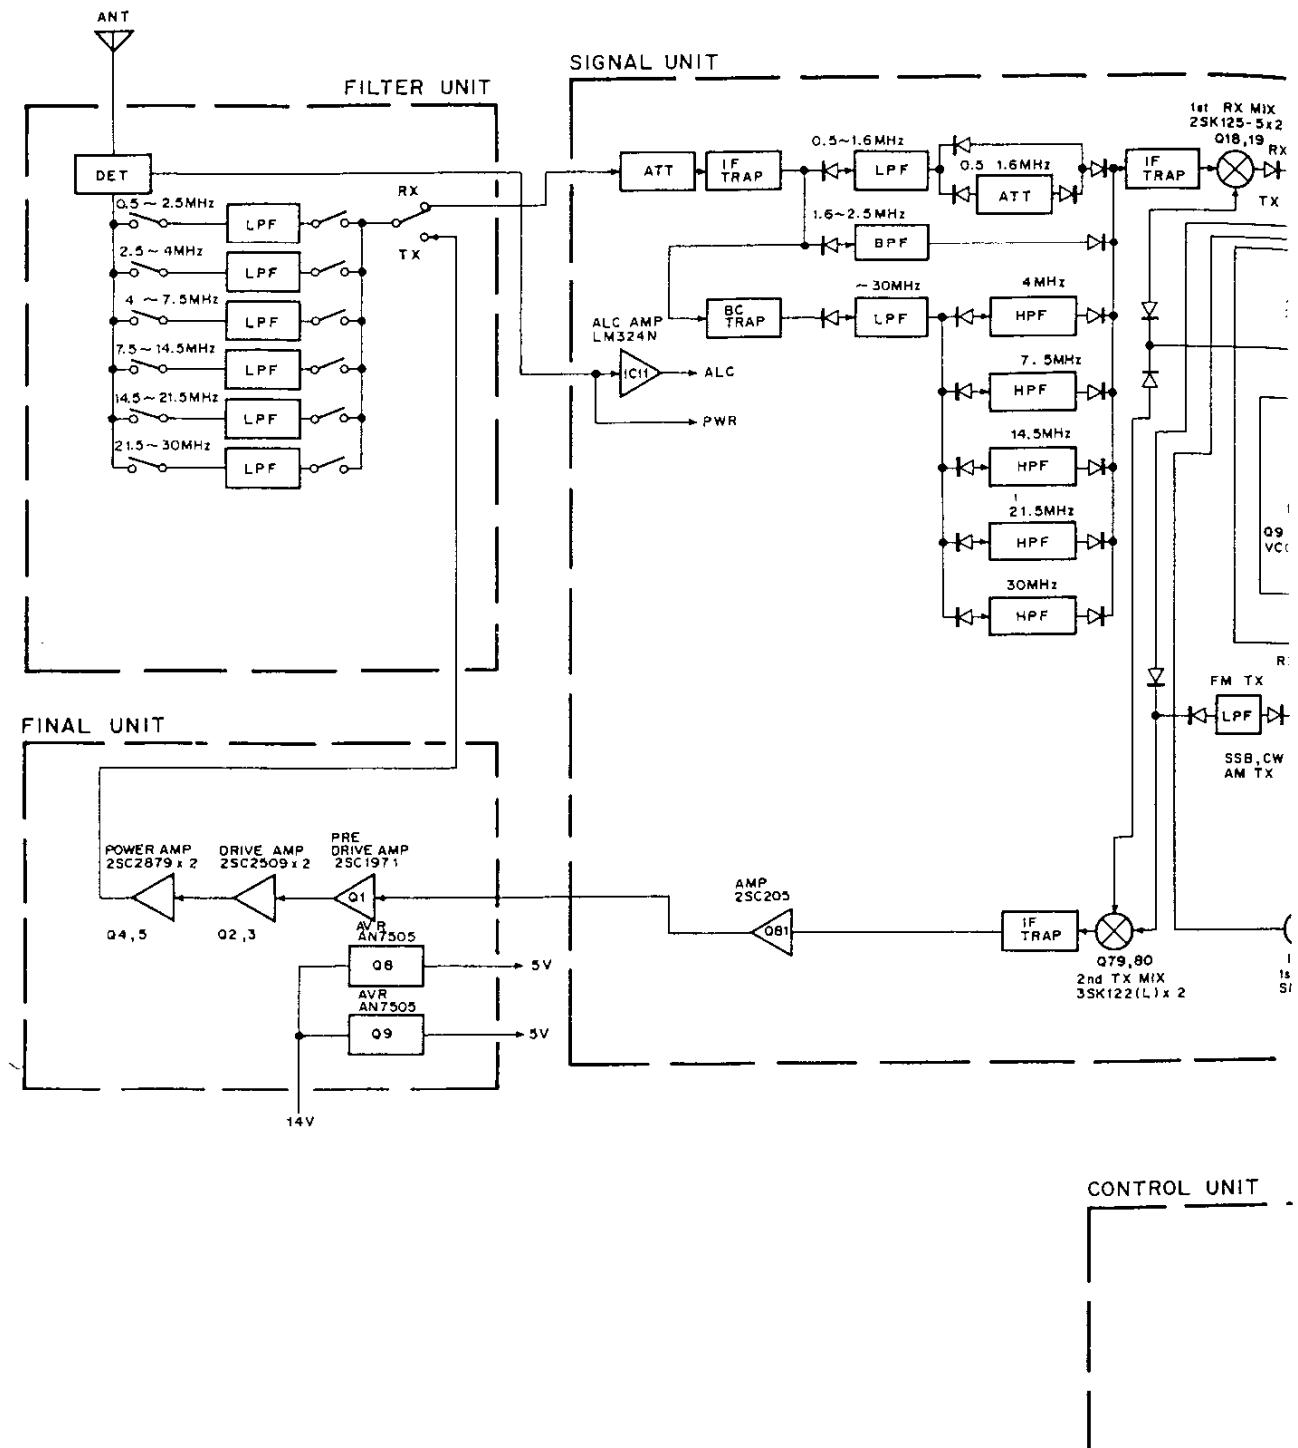TS-140S/6
BLOCK


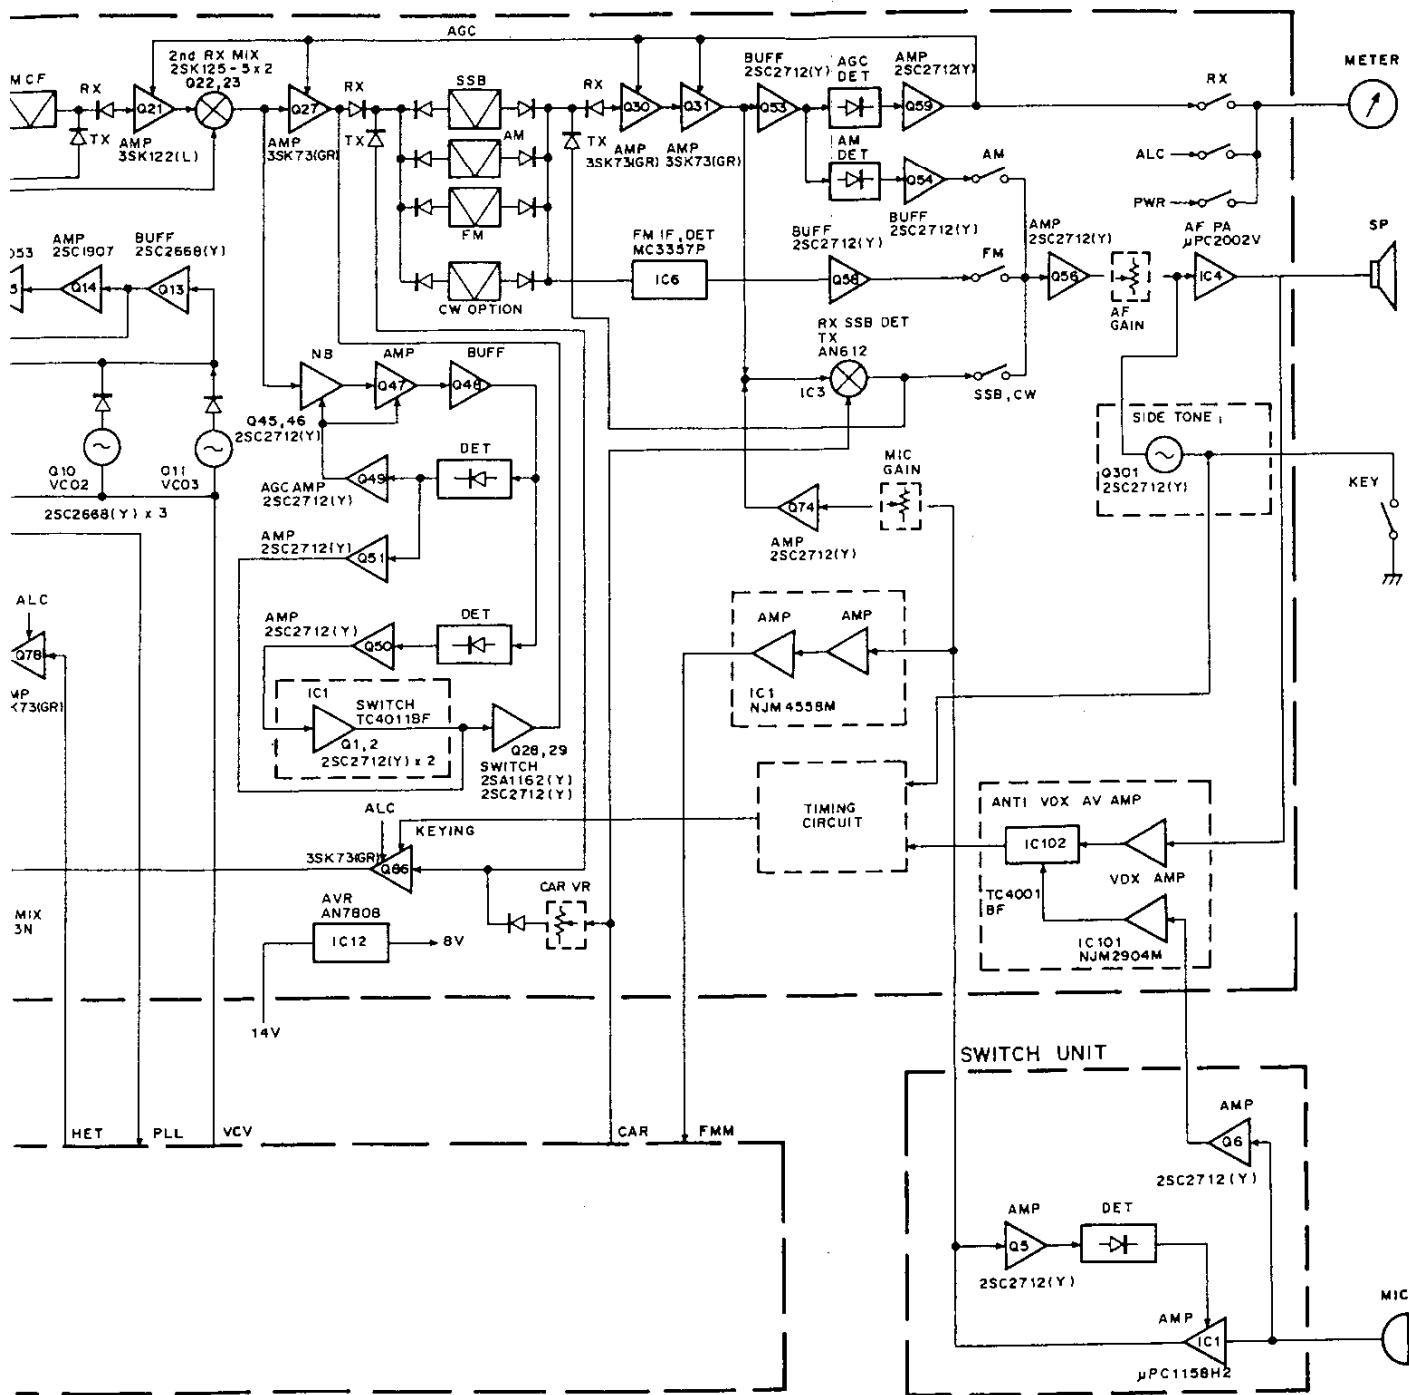
TS-140S/680S

BLOCK DIAGRAM (TS-140S)

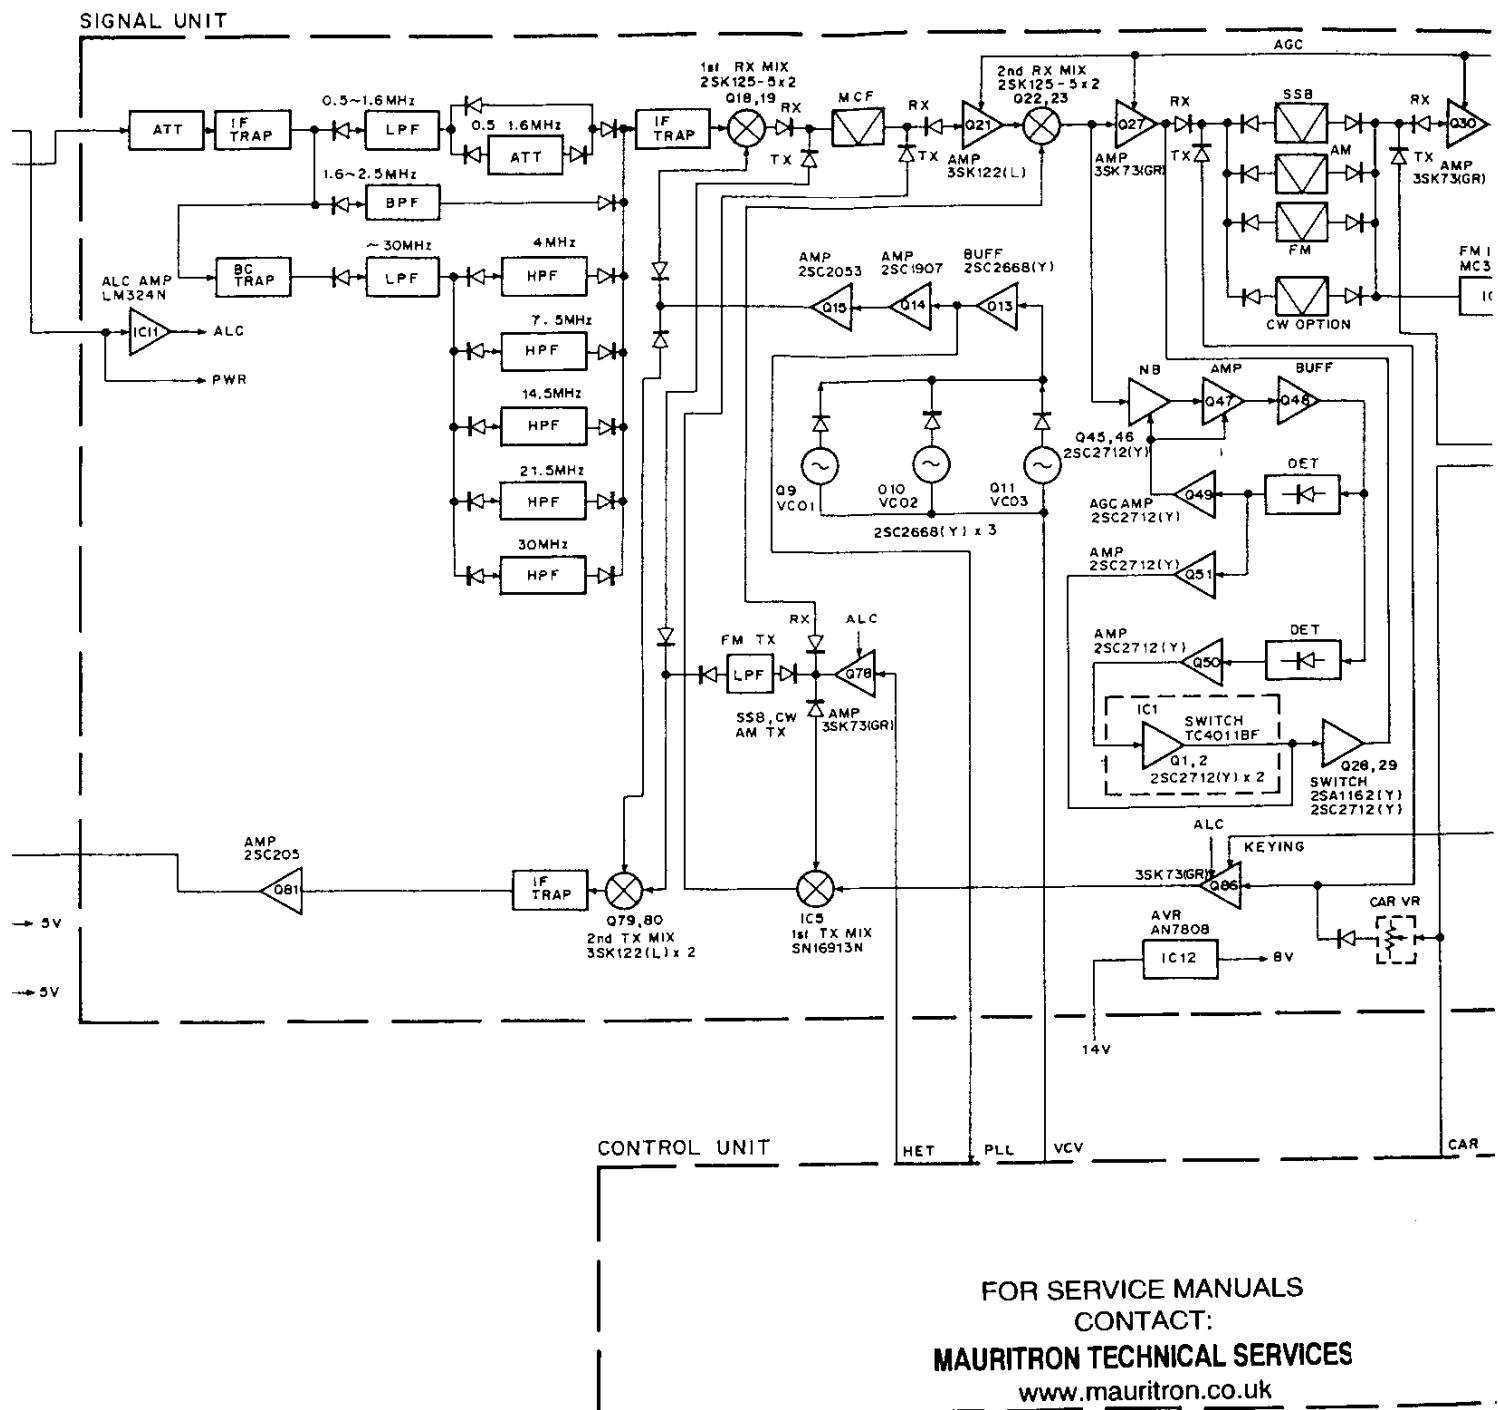

OS TS-140S/680S


IAGRAM (TS-140S)



TS-140S/680S CIRCUIT DIAGRAM

CONTROL UNIT (X53-3100-XX)

CONTROL UNIT (X53-3100-XX) -11 : TS-140S -12 : TS-680S

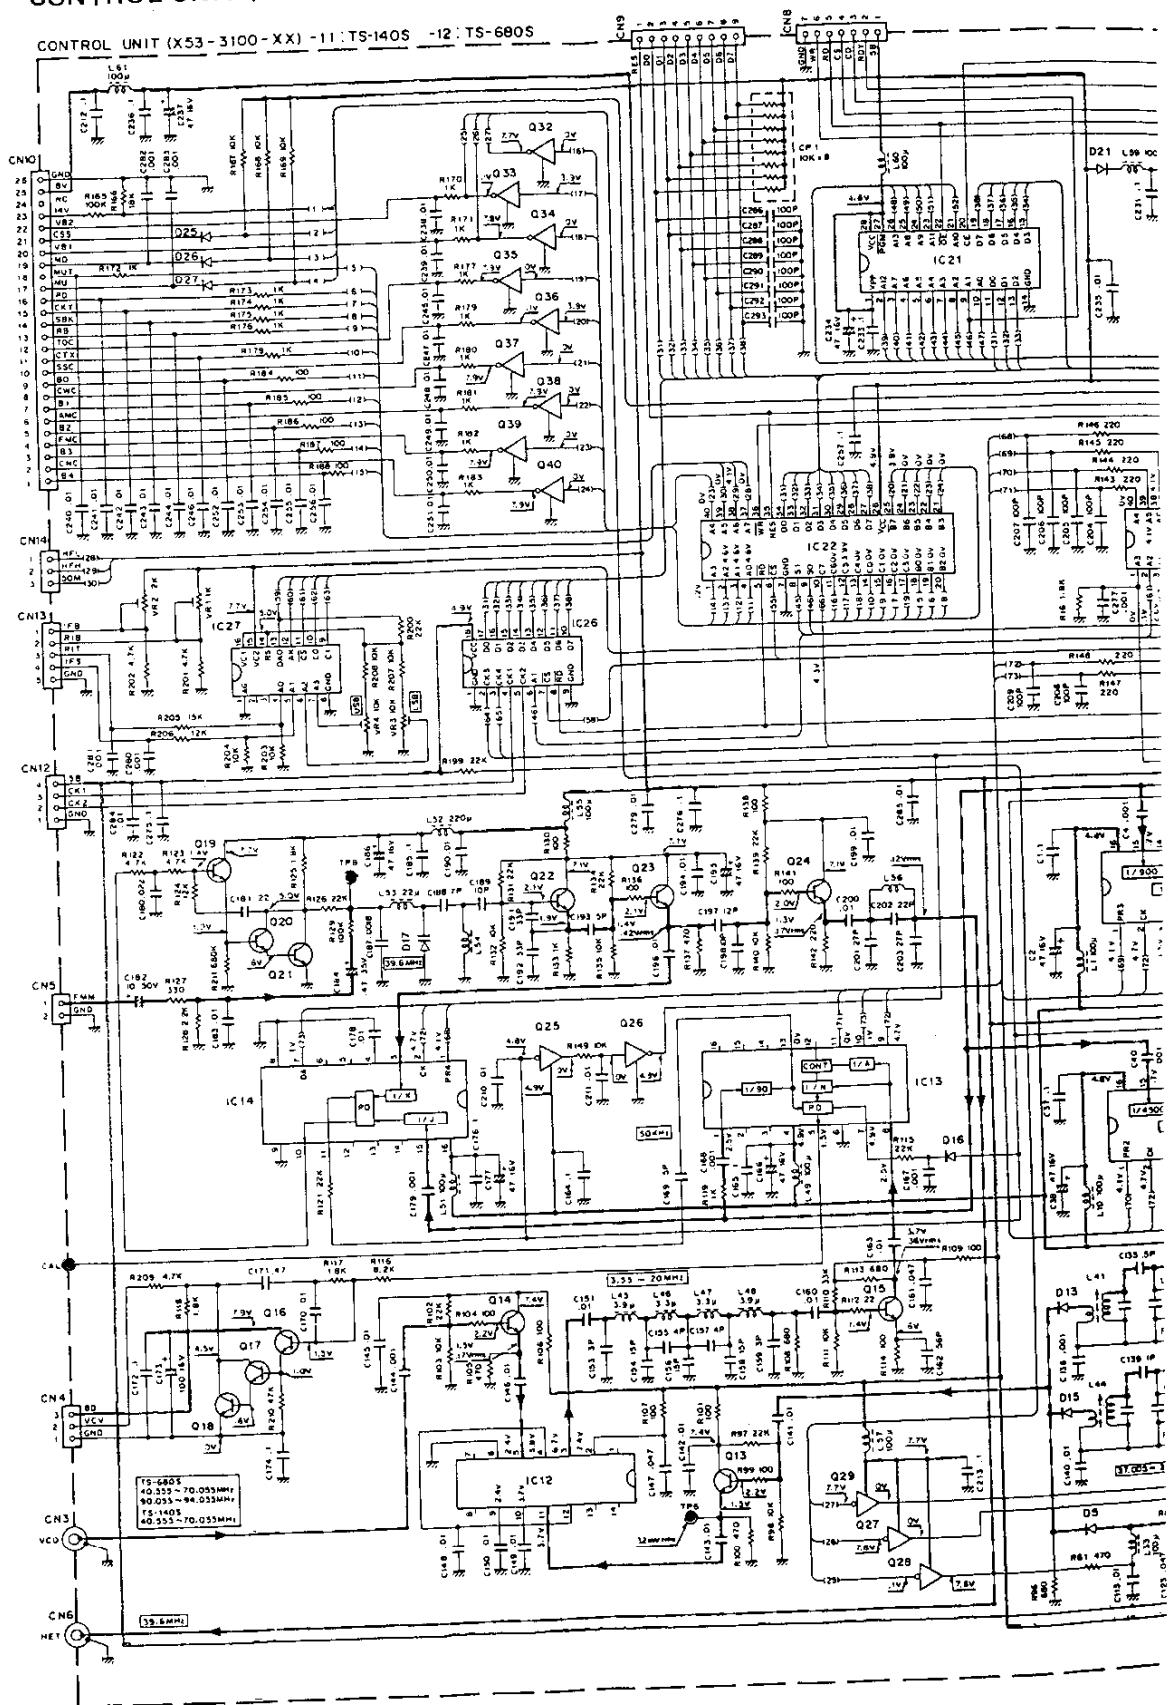

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk


TEL: 01844 - 351694

FAX: 01844 - 352554


Volts

CIRCUIT DIAGRAM

3-XX)

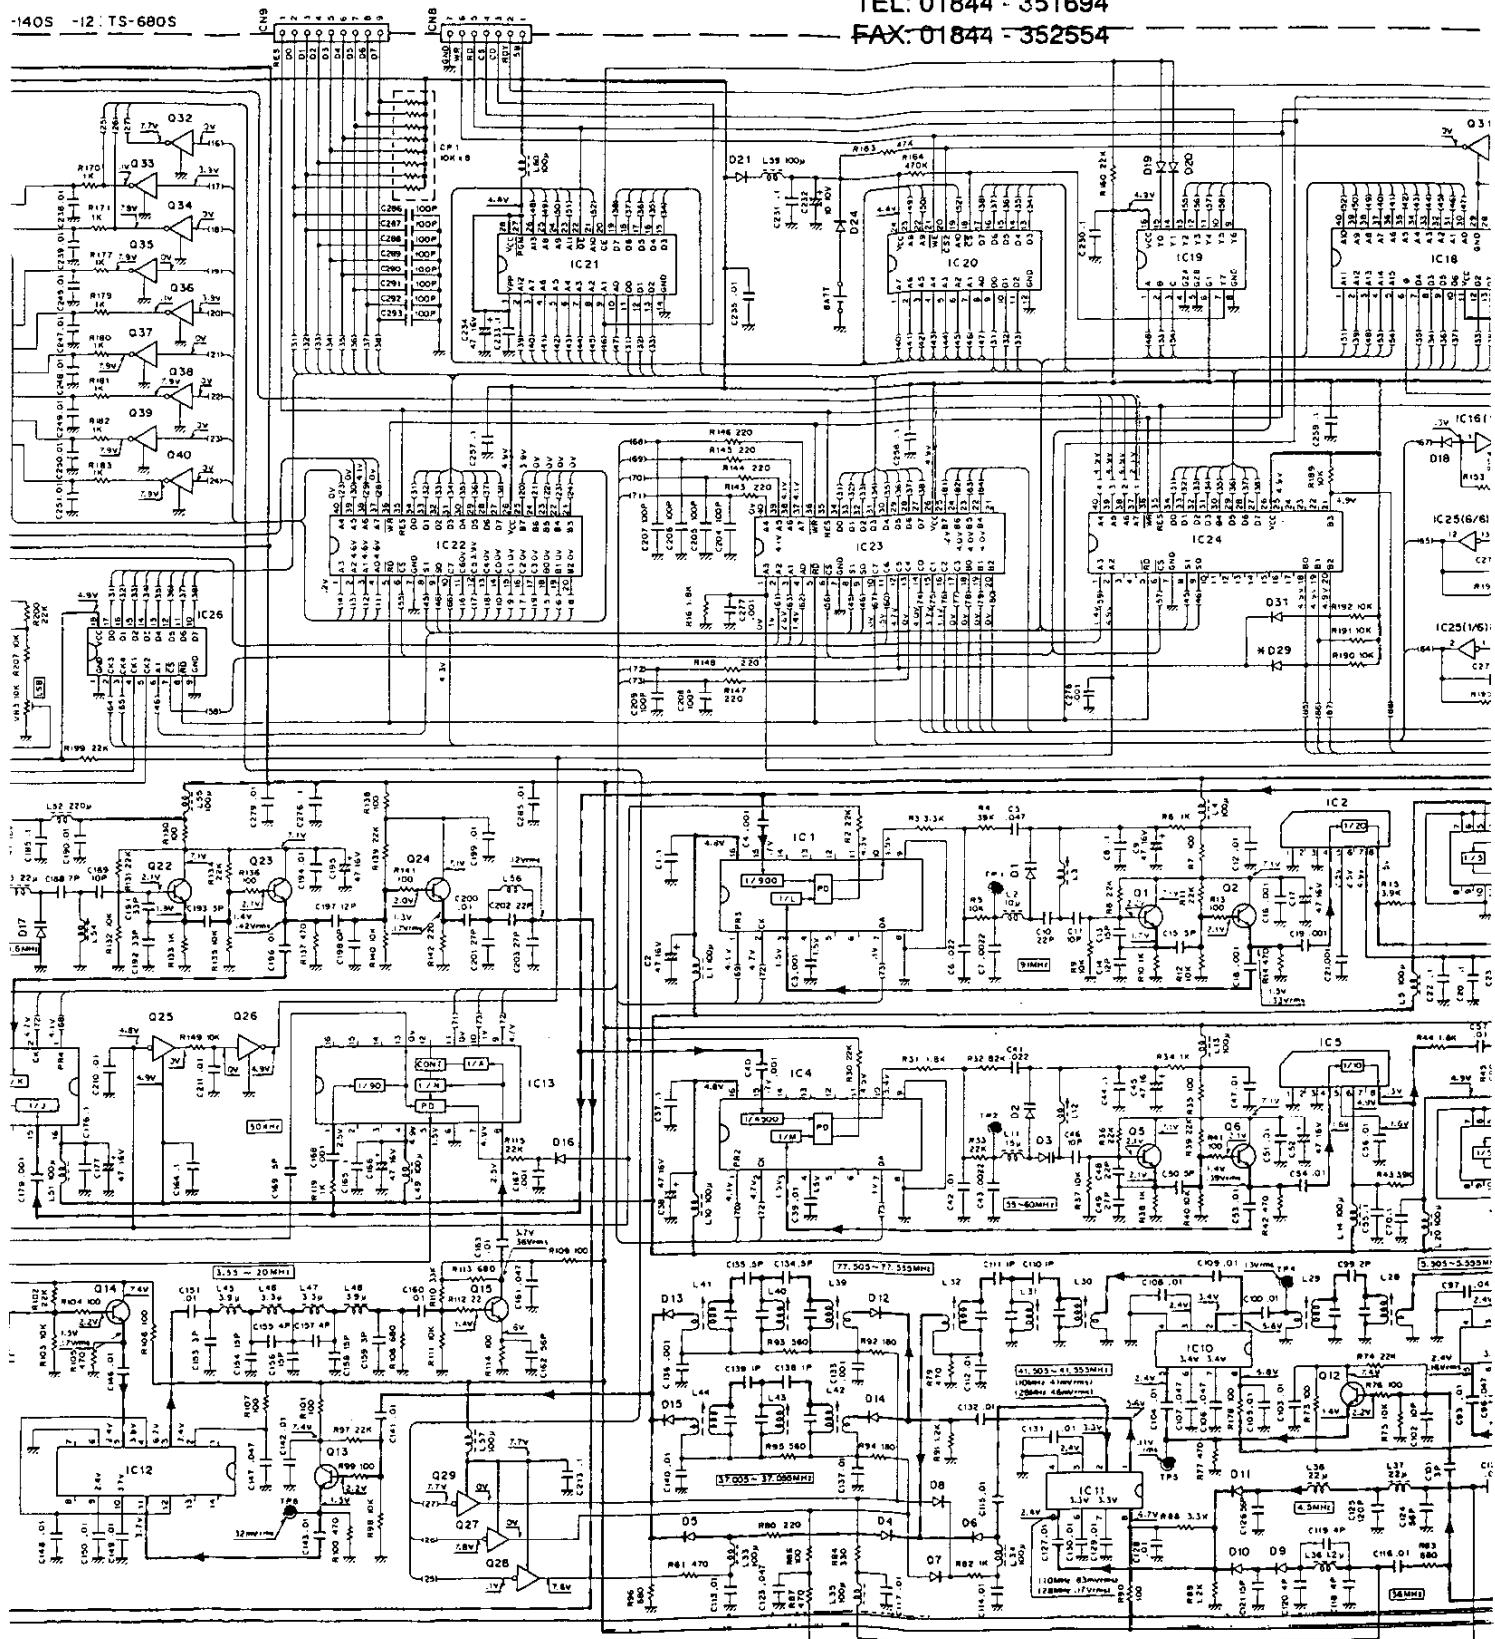

Voltage measurement condition f = 14MHz, Mode : USB. () : TX.

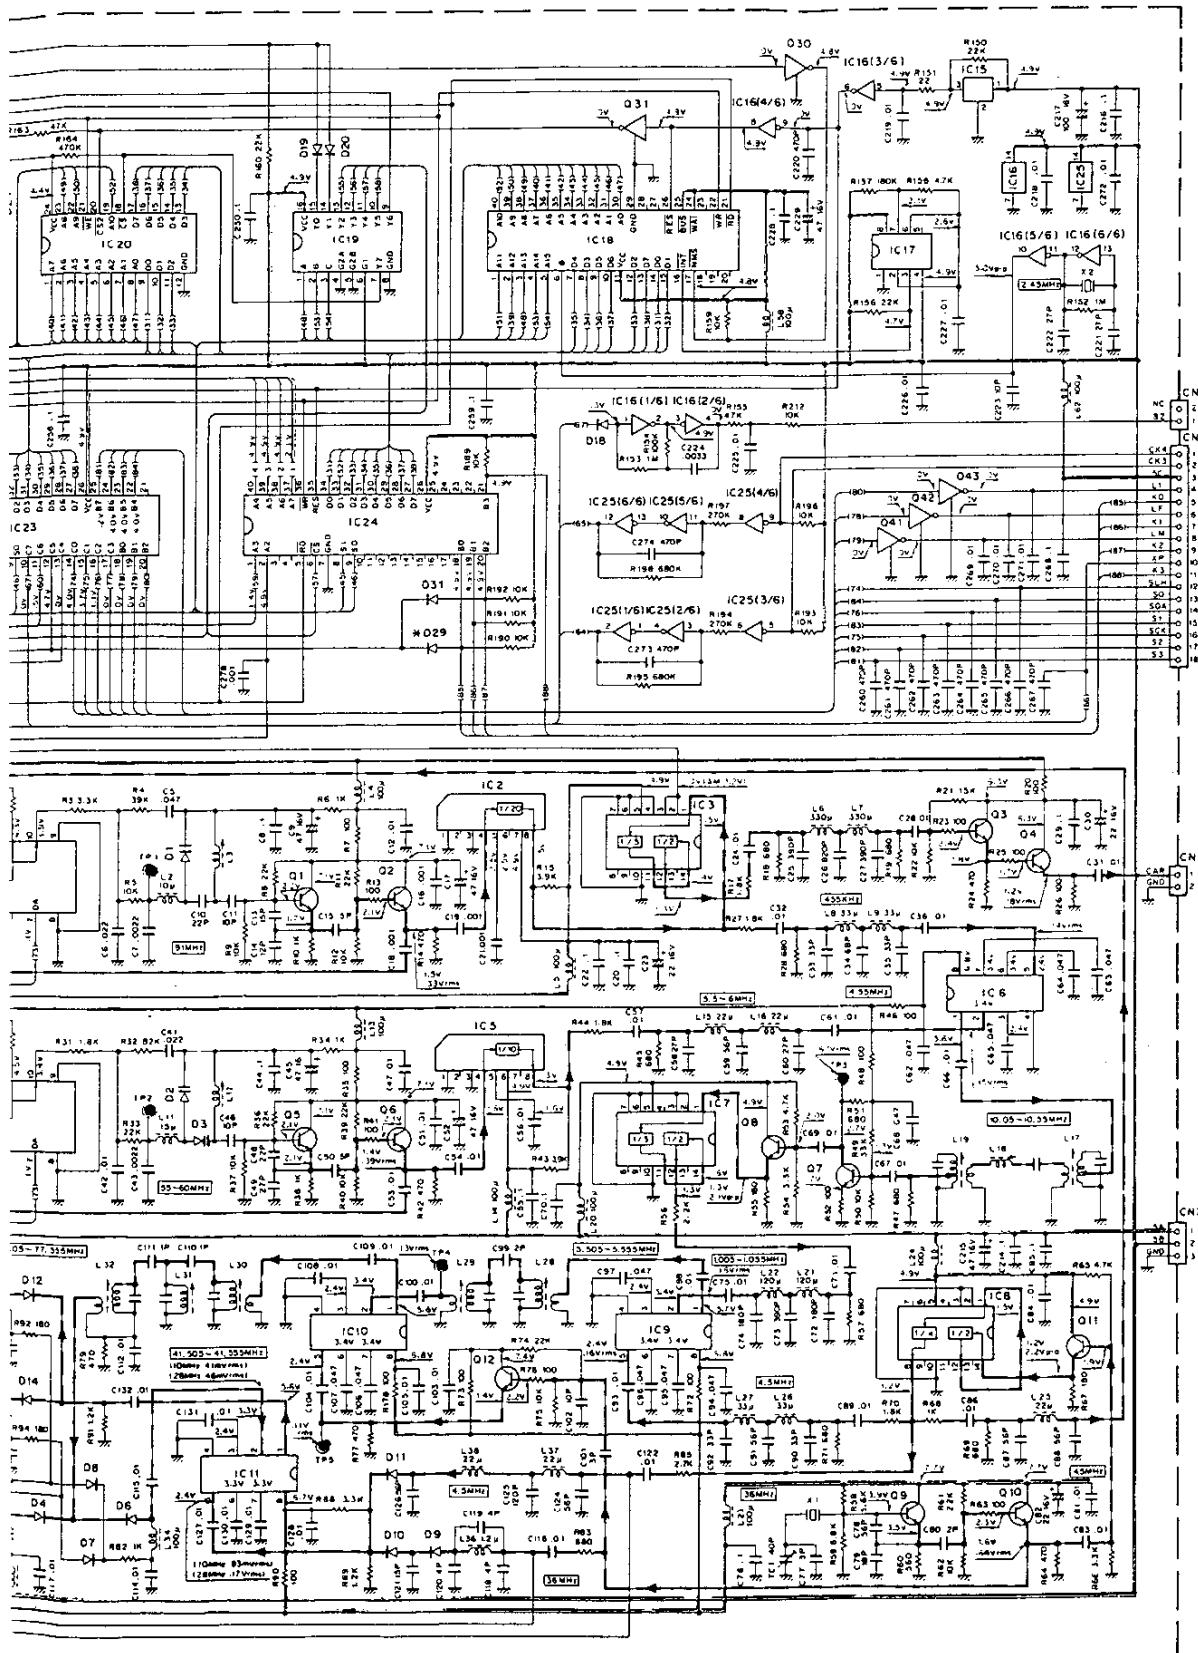


CONTROL UNIT (X53-3100-XX) -11 : TS-140S -12 : TS-680S Component side view


FOR SERVICE MANUALS

MAURITTRON TECHNICAL SERVICES
CONTACT:

www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

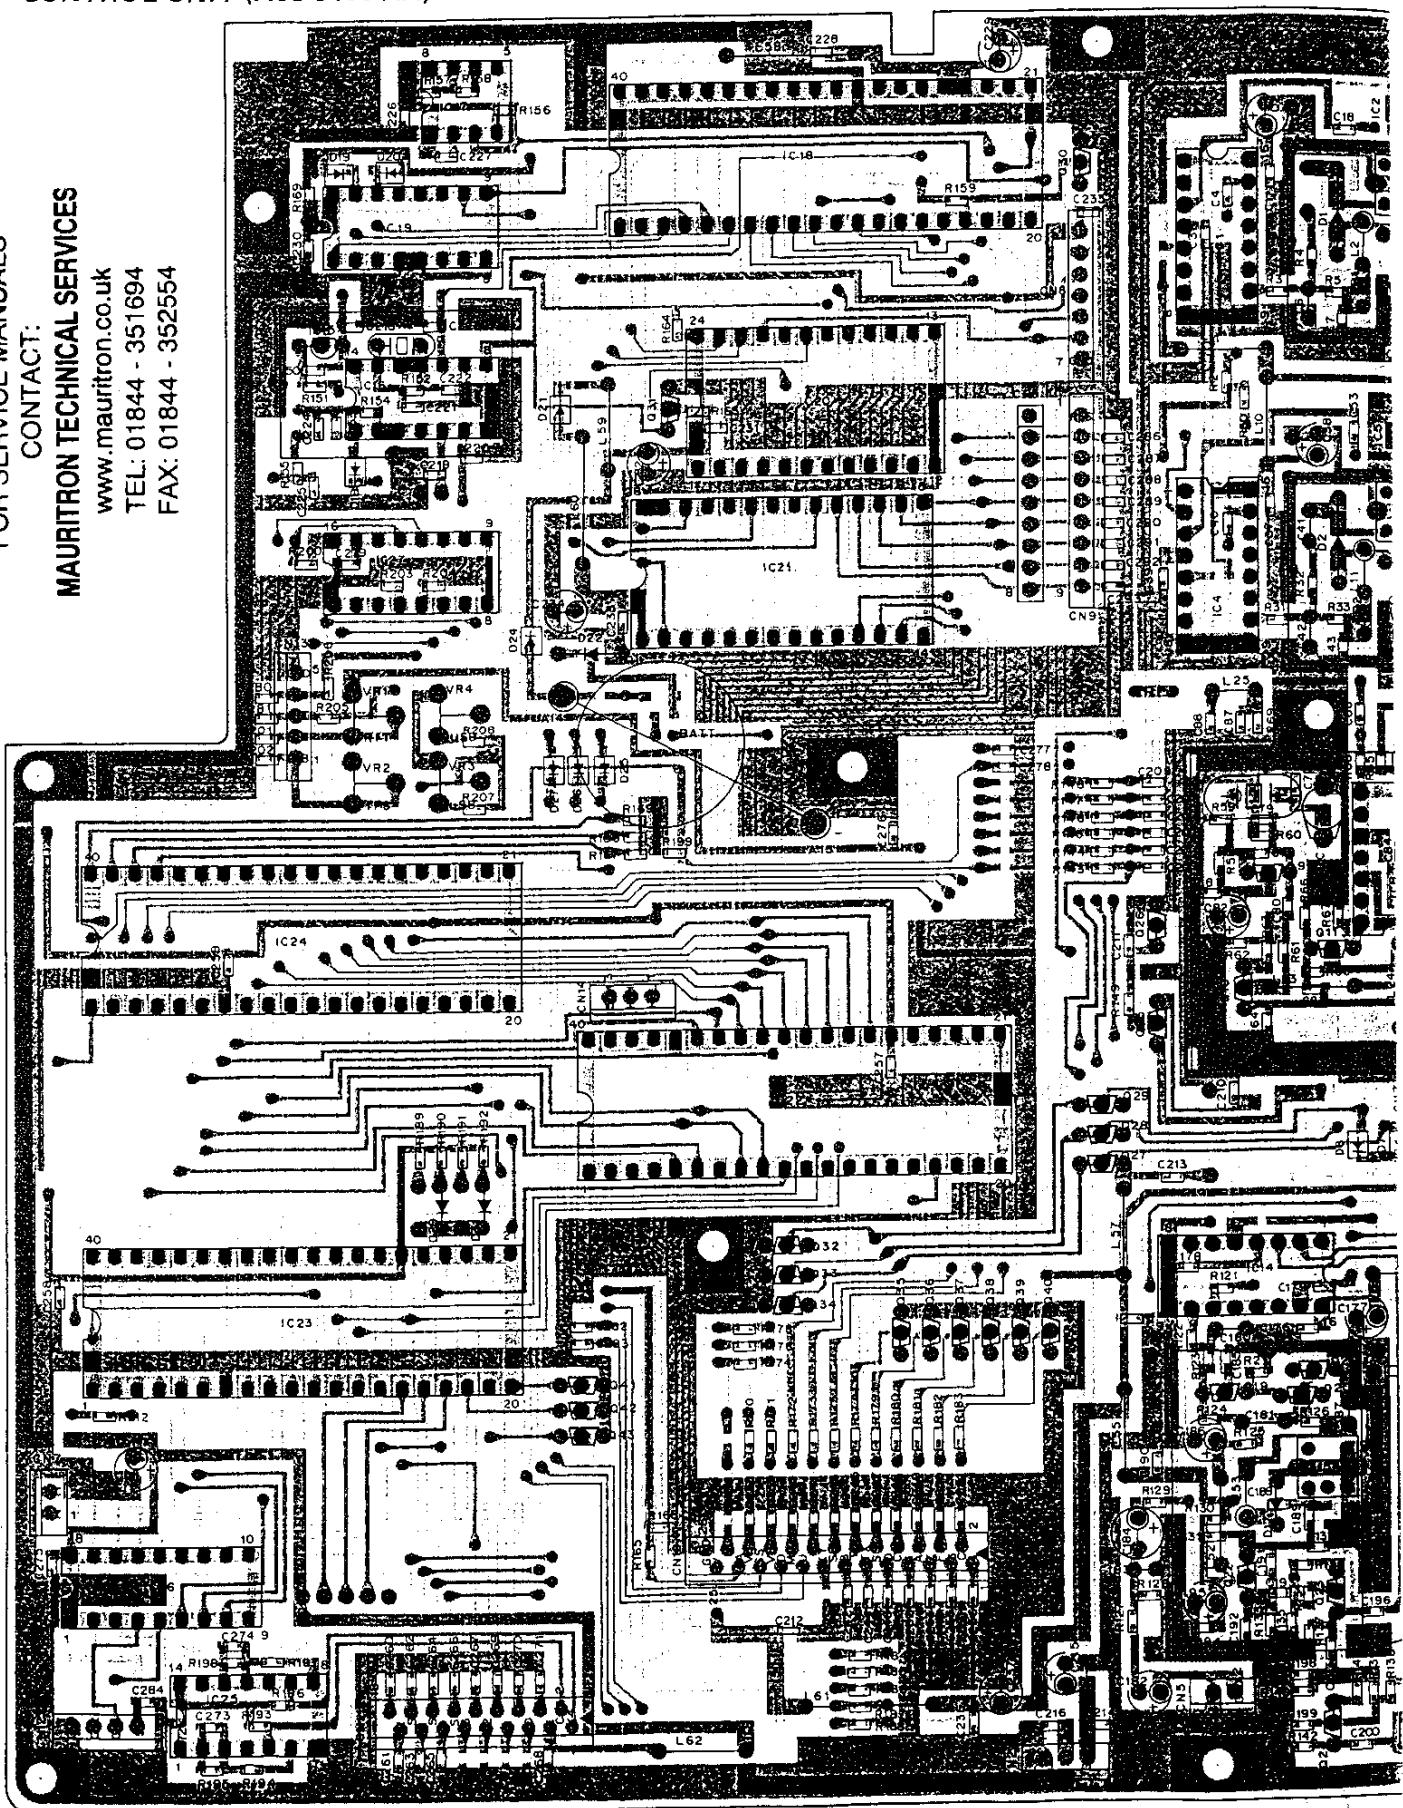

S-140S -12 : TS-680S Component side view

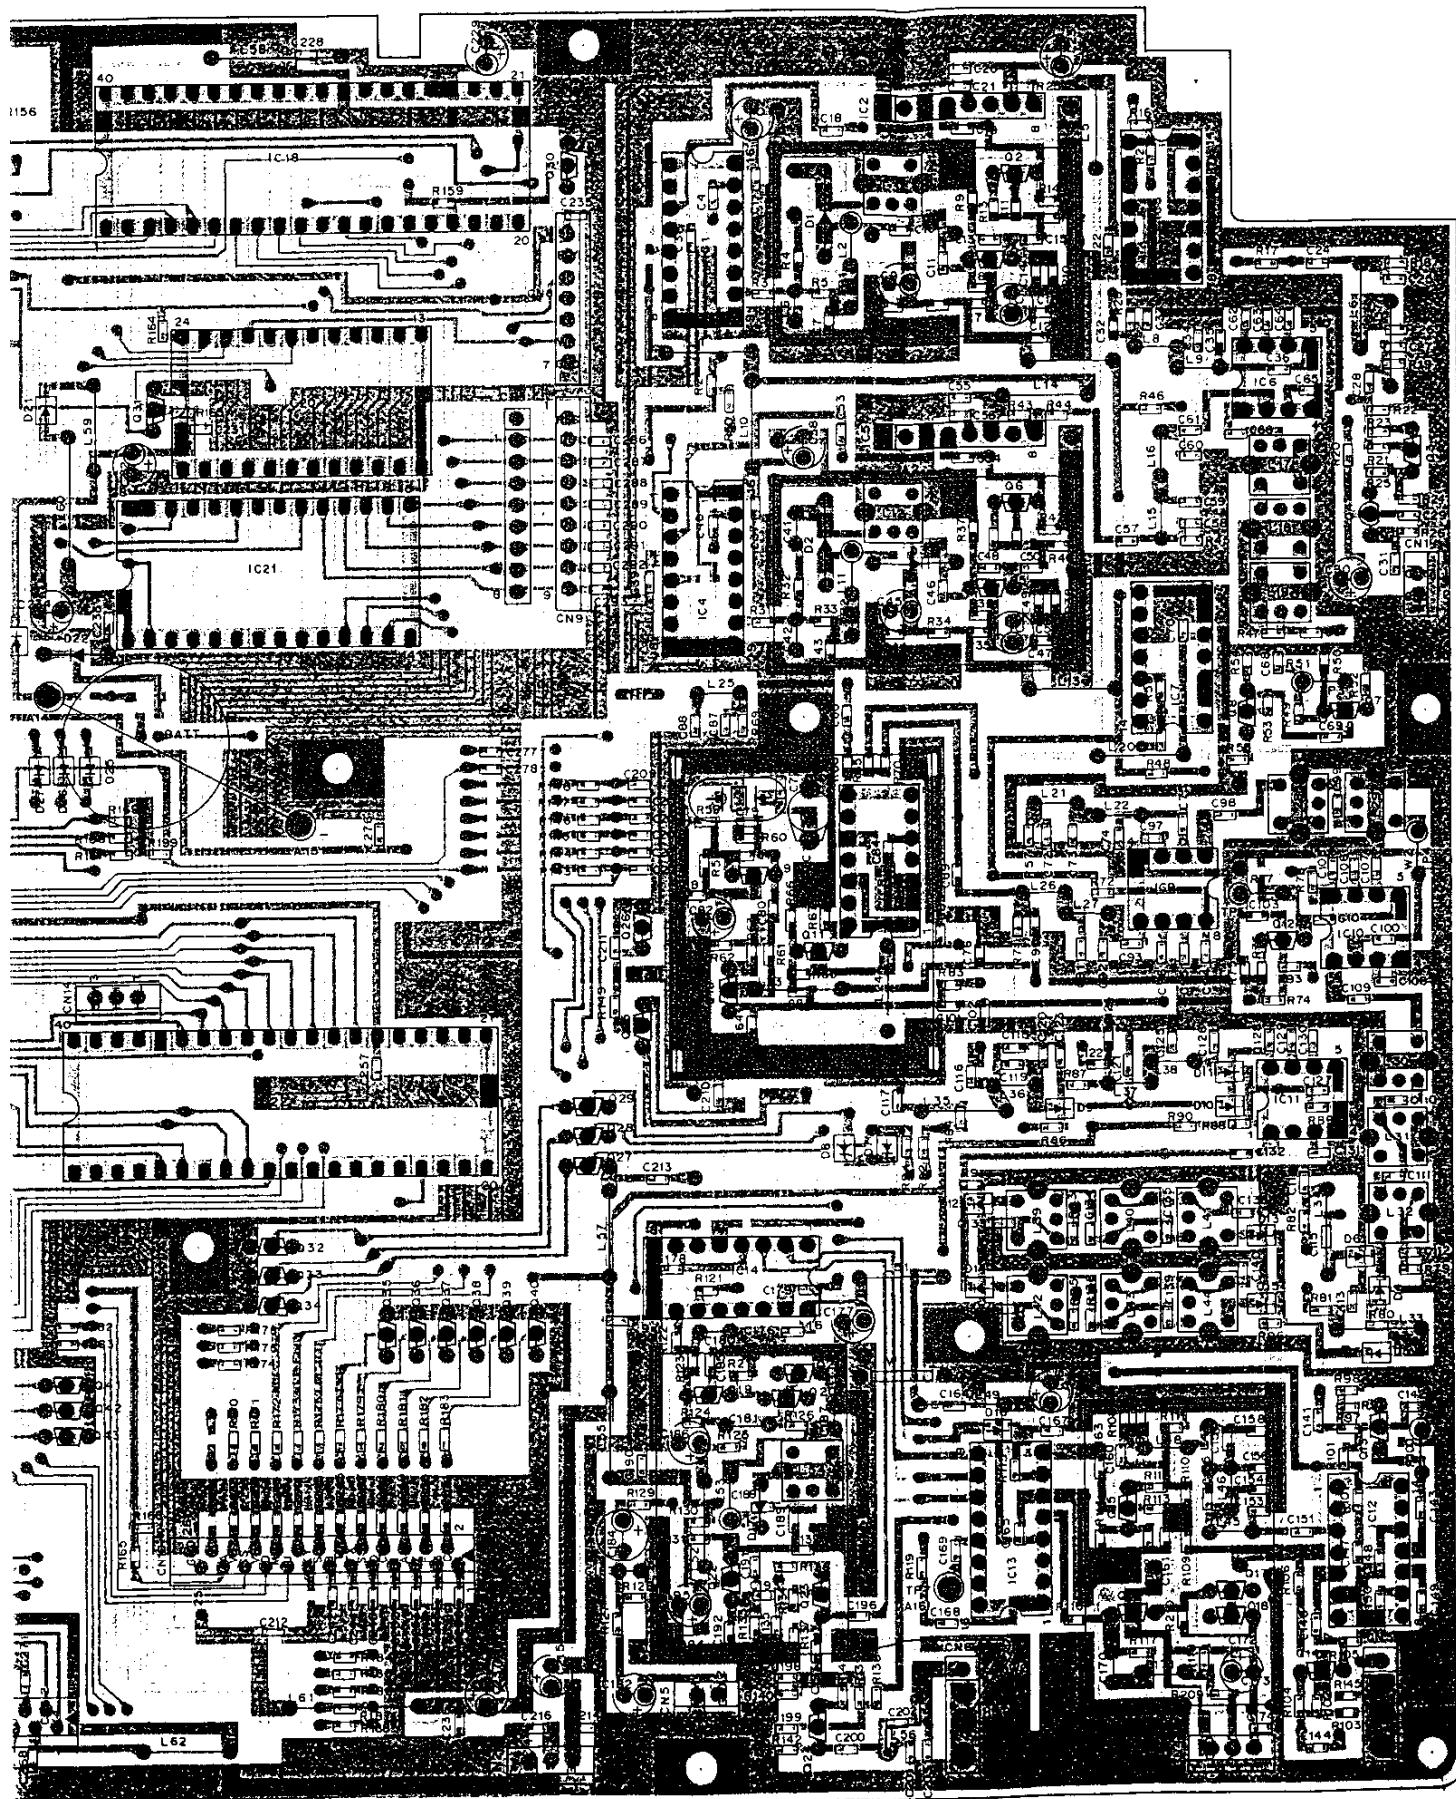

FOR SERVICE MANUALS

CONTACT:



MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk


TEL: 01844 - 351694


FAX: 01844 - 352554

CONTROL UNIT (X53-3100-XX) -11 : TS-140S -12 :

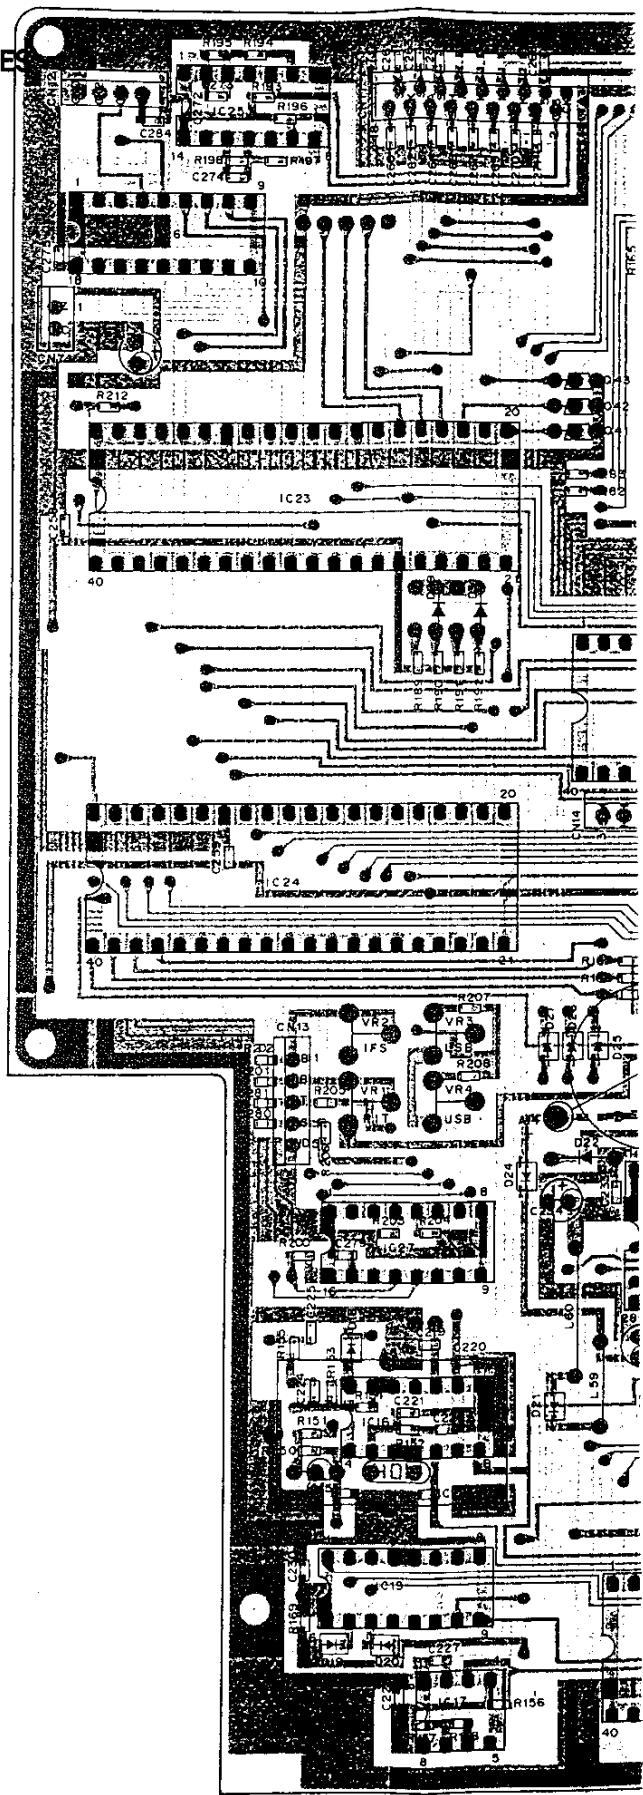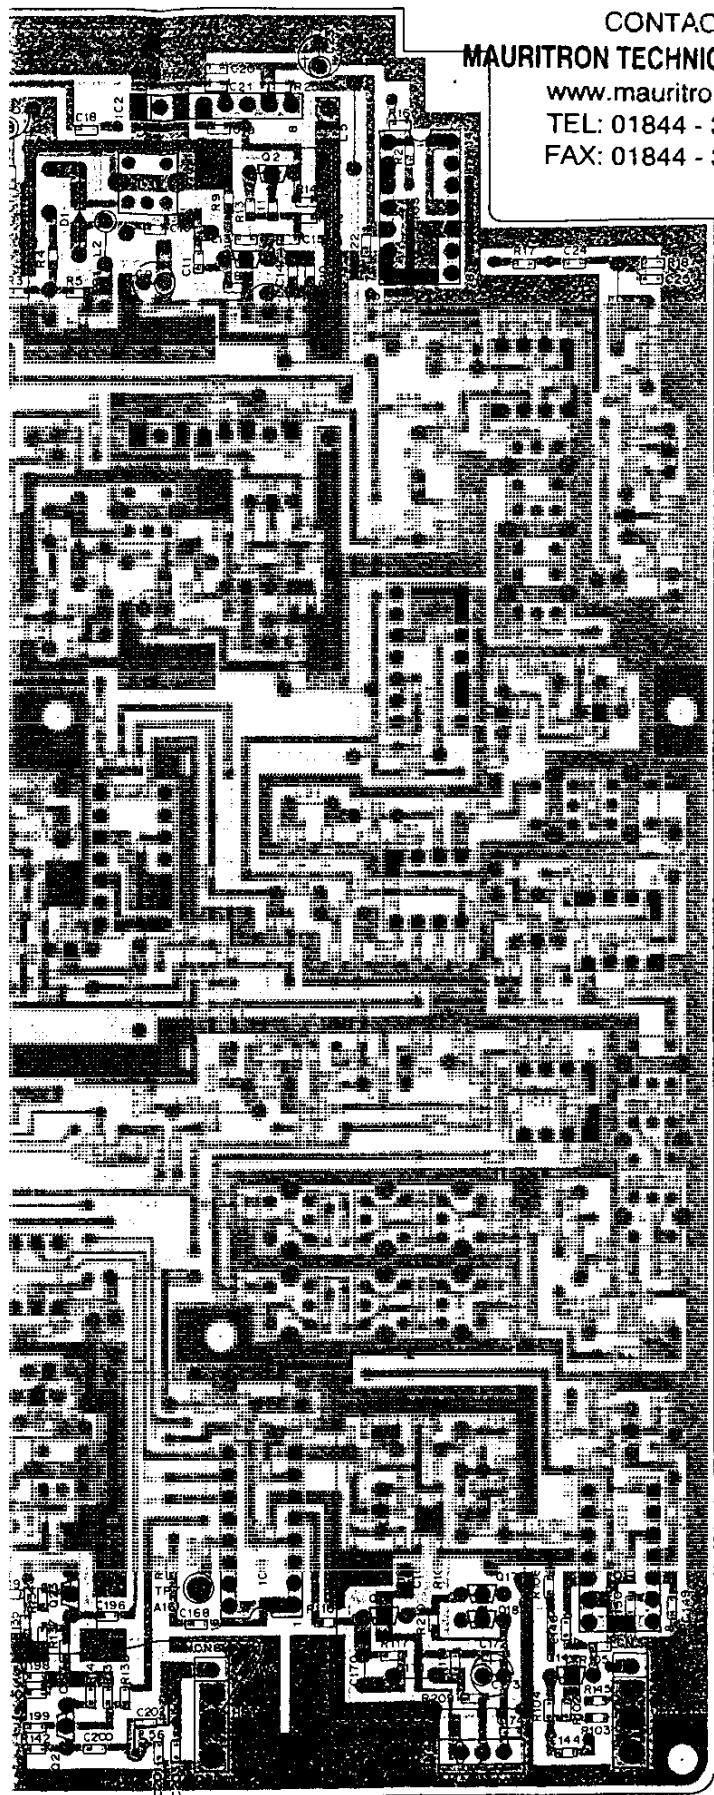

CONTROL UNIT (X53-3100-XX) -11: TS-140S -12: TS-680S Foil side view


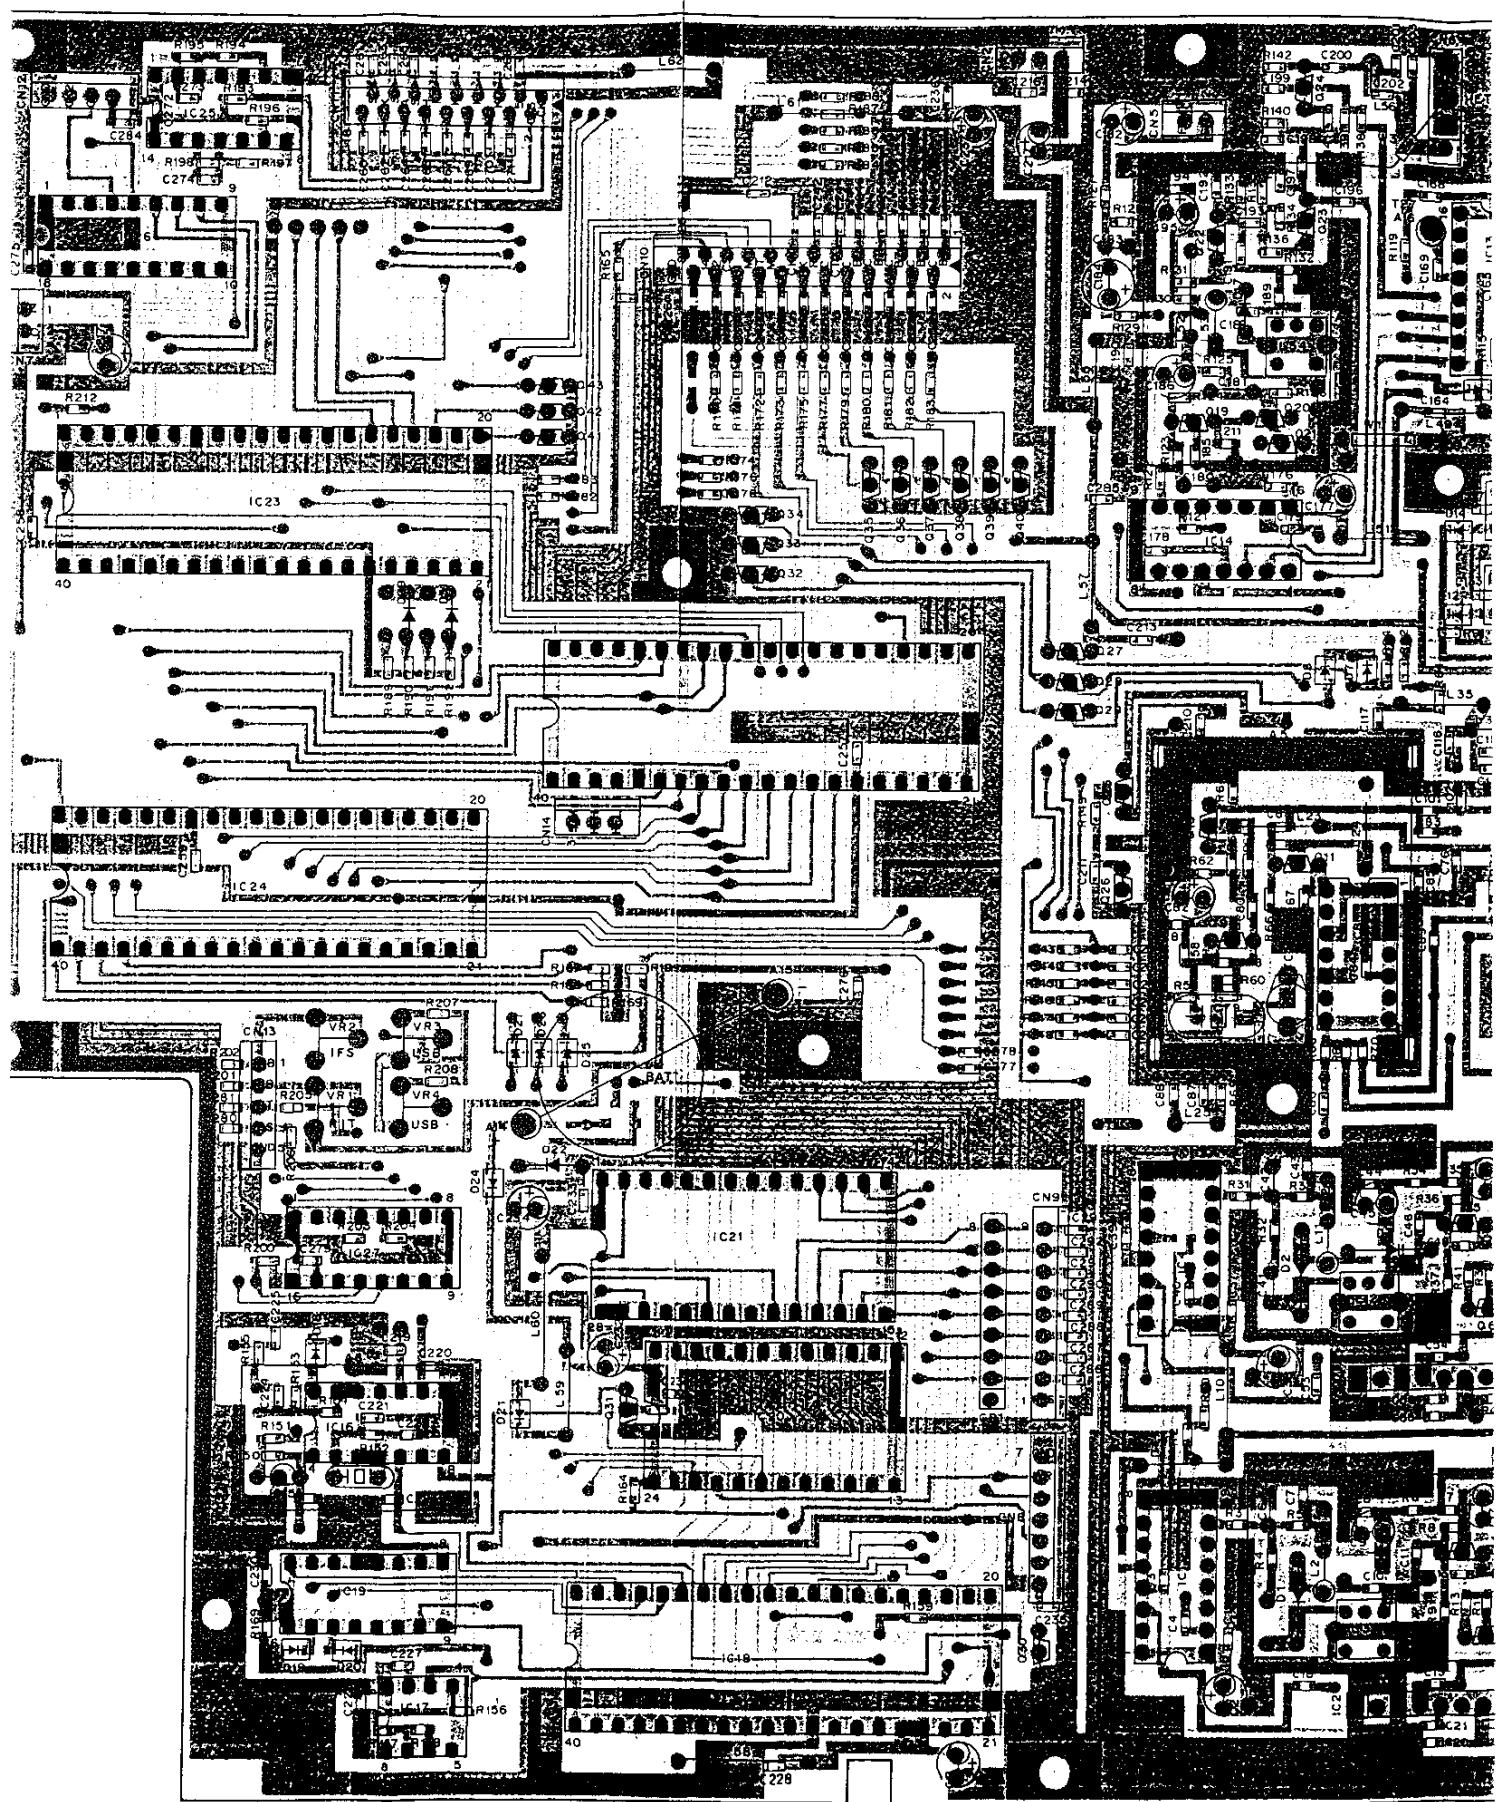


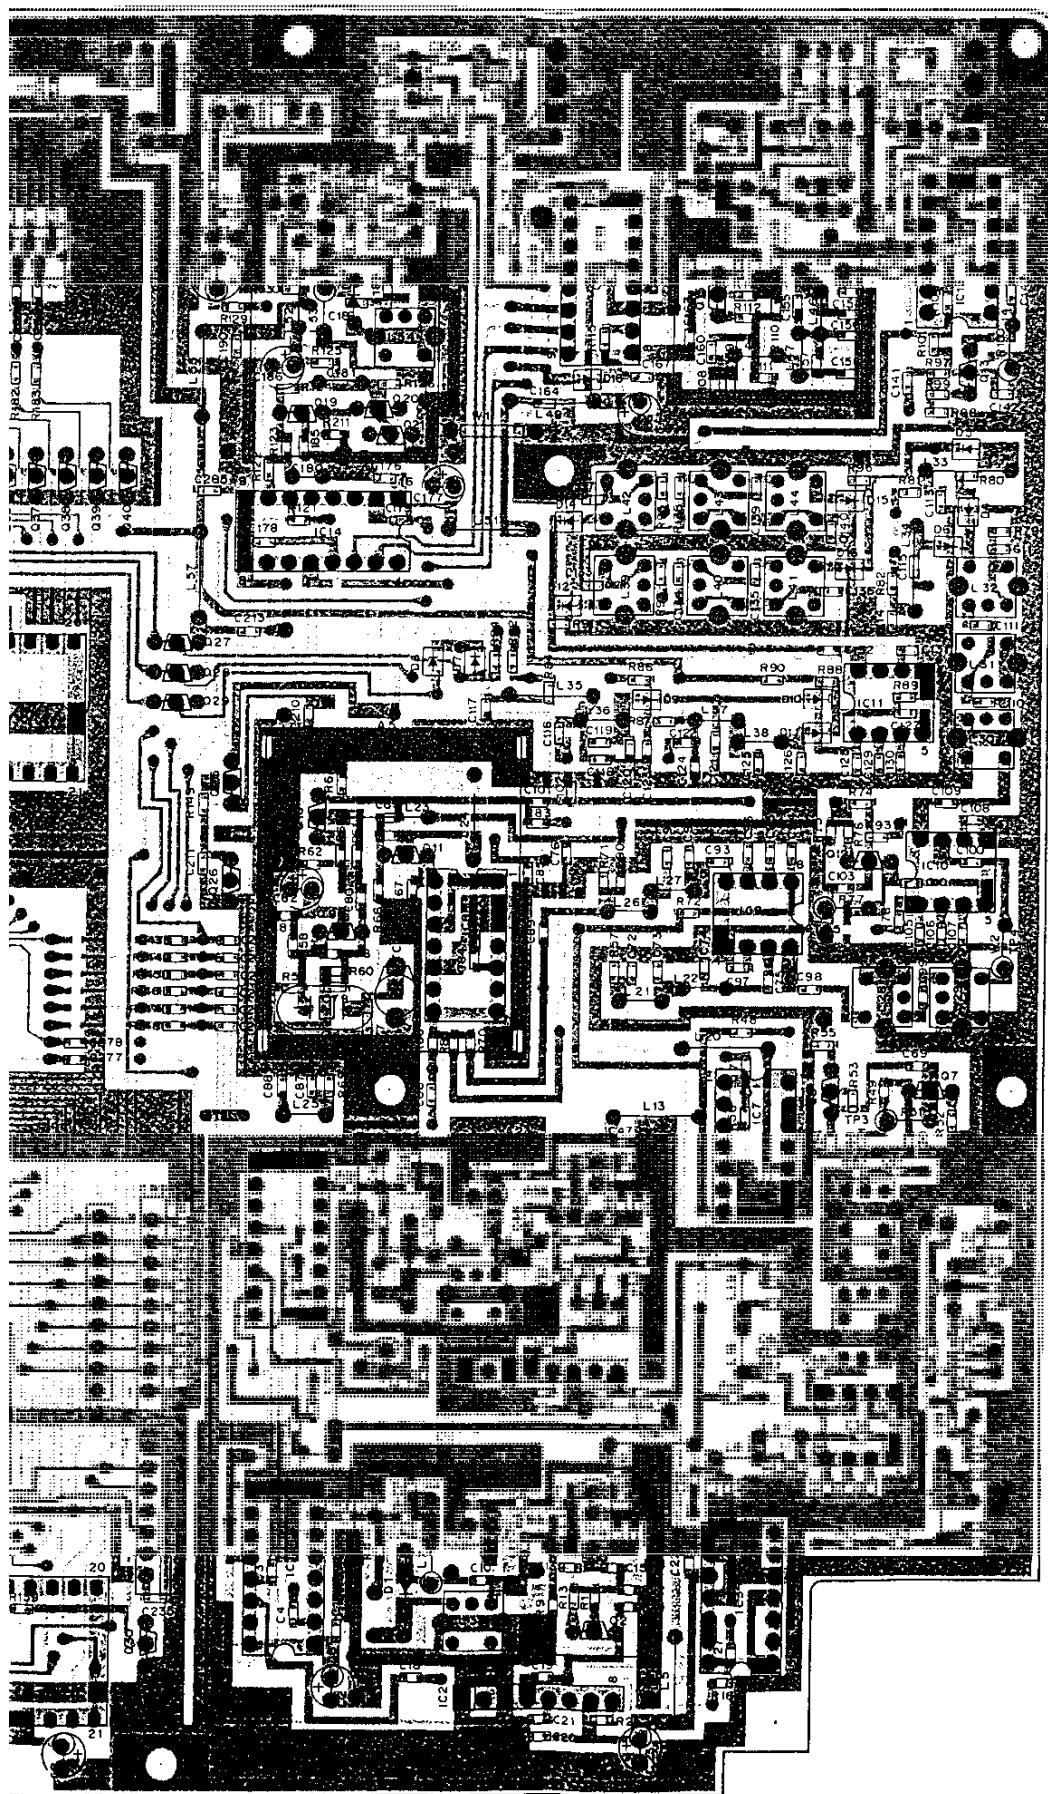


FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

PC BOARD VIEWS


TS-140S/680S

2SC1959(Y)
2SC1971MB87006
MB4052


2SC2787(L)




2SC2509




PST520D





DTC124ES




2SD1406(Y)




TC4069UBP

M74LS93P
SN76514N


AN7805




SN74LS13BN




BU18400A




M54927P




TC5518CPL-20




MBM27C128-25JAJ2

M54459L
M54460L




TMPB255AP-5



SN74LS90N




LZ92K37

SN16913P
NE555C2SC2458(Y) DTA143ES
2SC2459(BL) DTC144WS
2SC2668(Y) DTC143TS
DTA124ES

TS-140S/680S PC BOARD VIEWS (TS-680S)


1
2
3
4
5
6
7
101
SIDE TONE (X59-1060-00)

Component side view

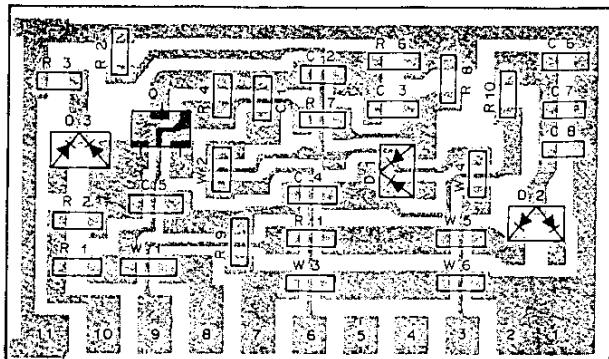


NB2 (X59-3350-00)

Component side view

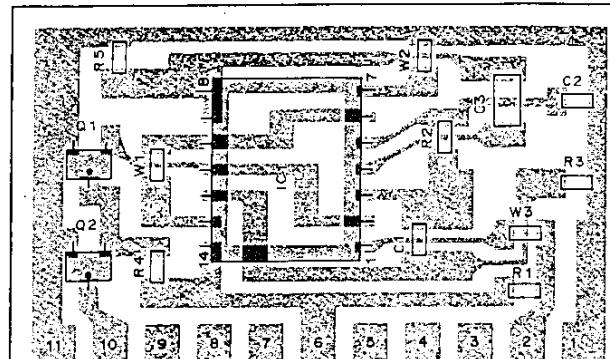


FM MIC AMP. (X59-3000-02)

Component side view

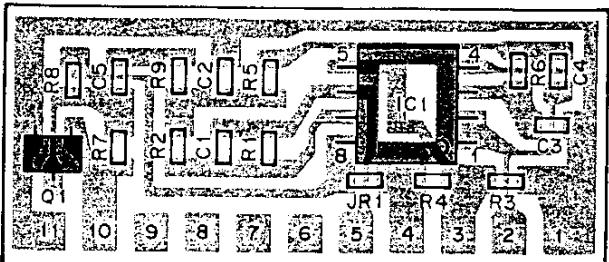


DELAY TIME (X59-3360-00)

Component side view

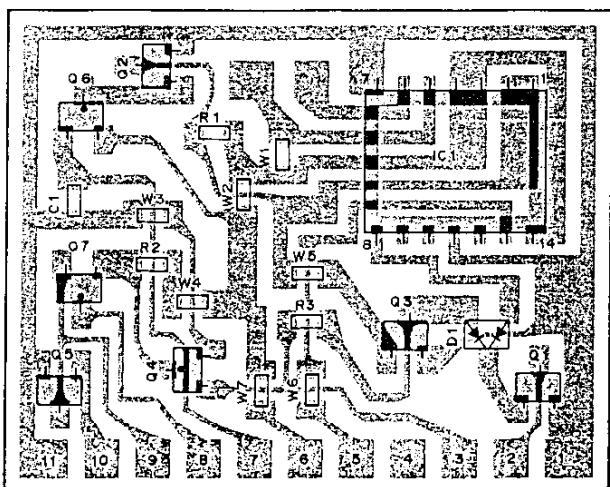

TRX (X59-3340-00)

Component side view

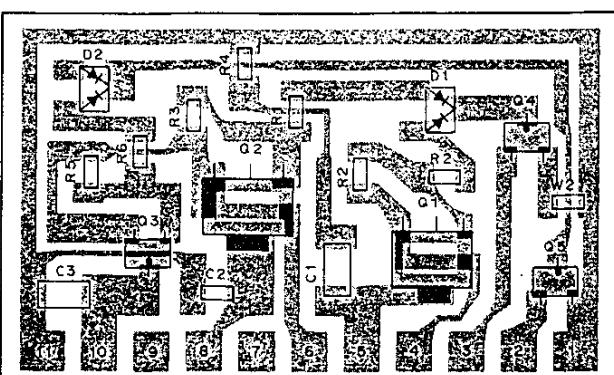

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICESwww.mauritron.co.uk

TEL: 01844 - 351694


FAX: 01844 - 352554

RD VIEWS (TS-680S)

SIGNAL UNIT (X57-3190-00) Component side view


NB2 (X59-3350-00)

Component side view

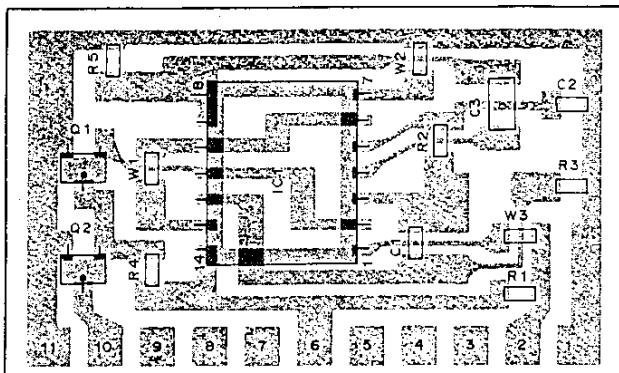


DELAY TIME (X59-3360-00)


Component side view

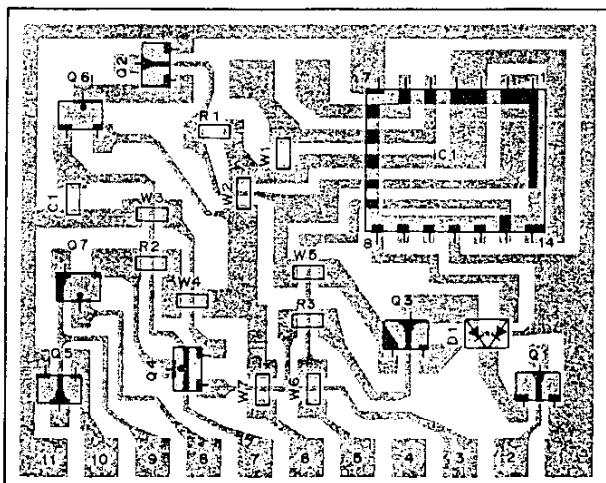


FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

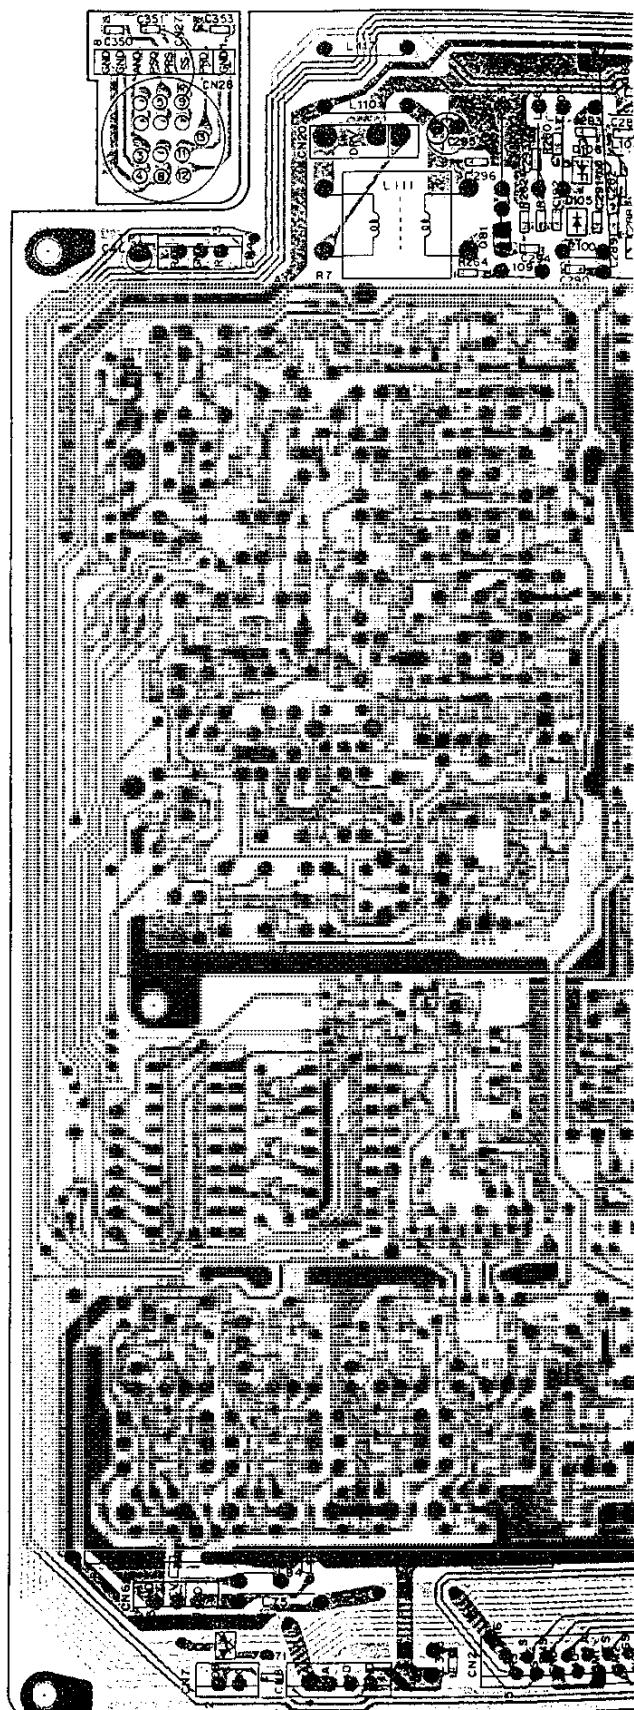



SIGNAL UNIT (X57-3190-00) Component side view

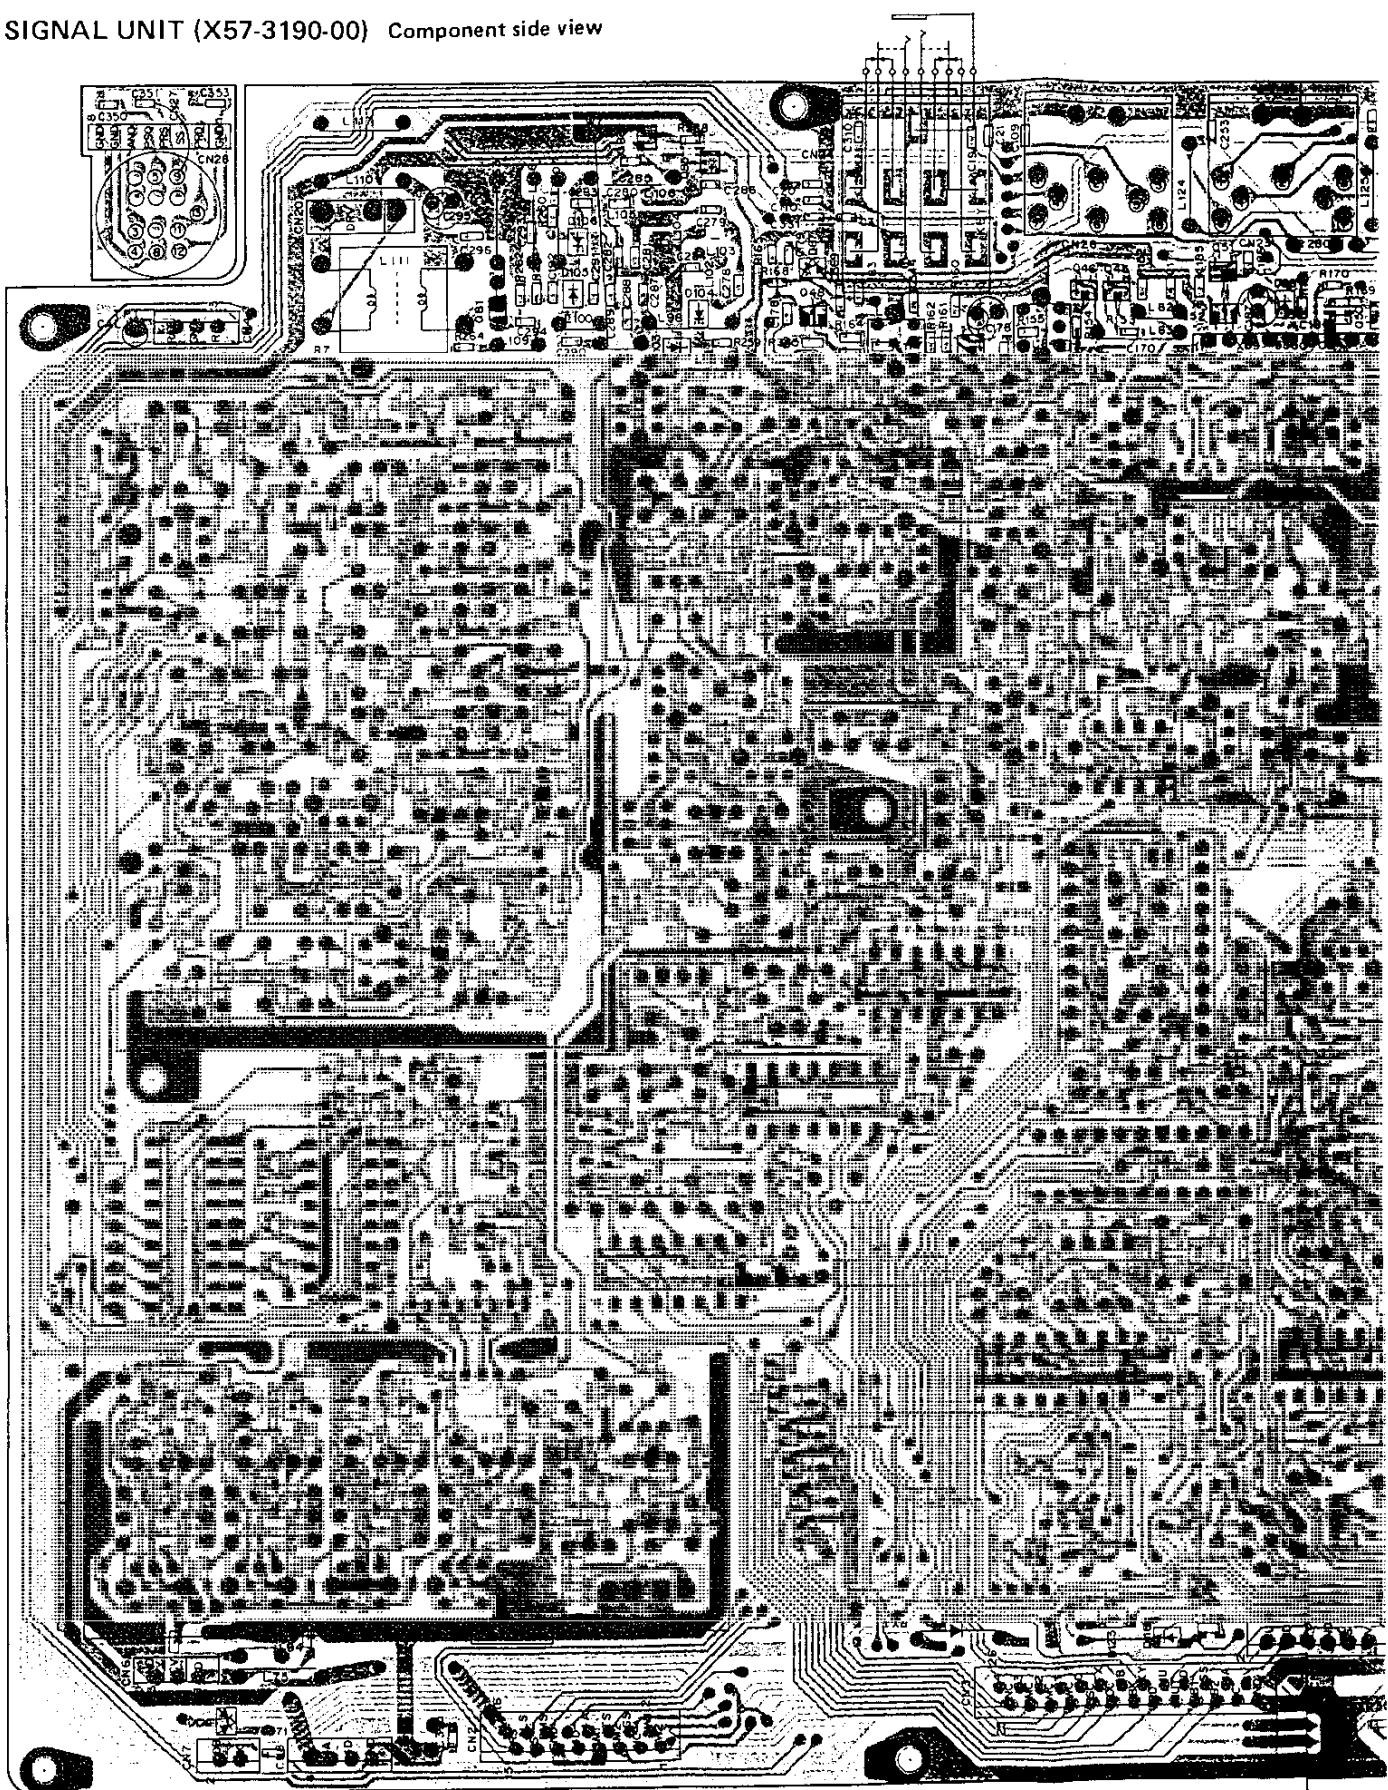

SIGN

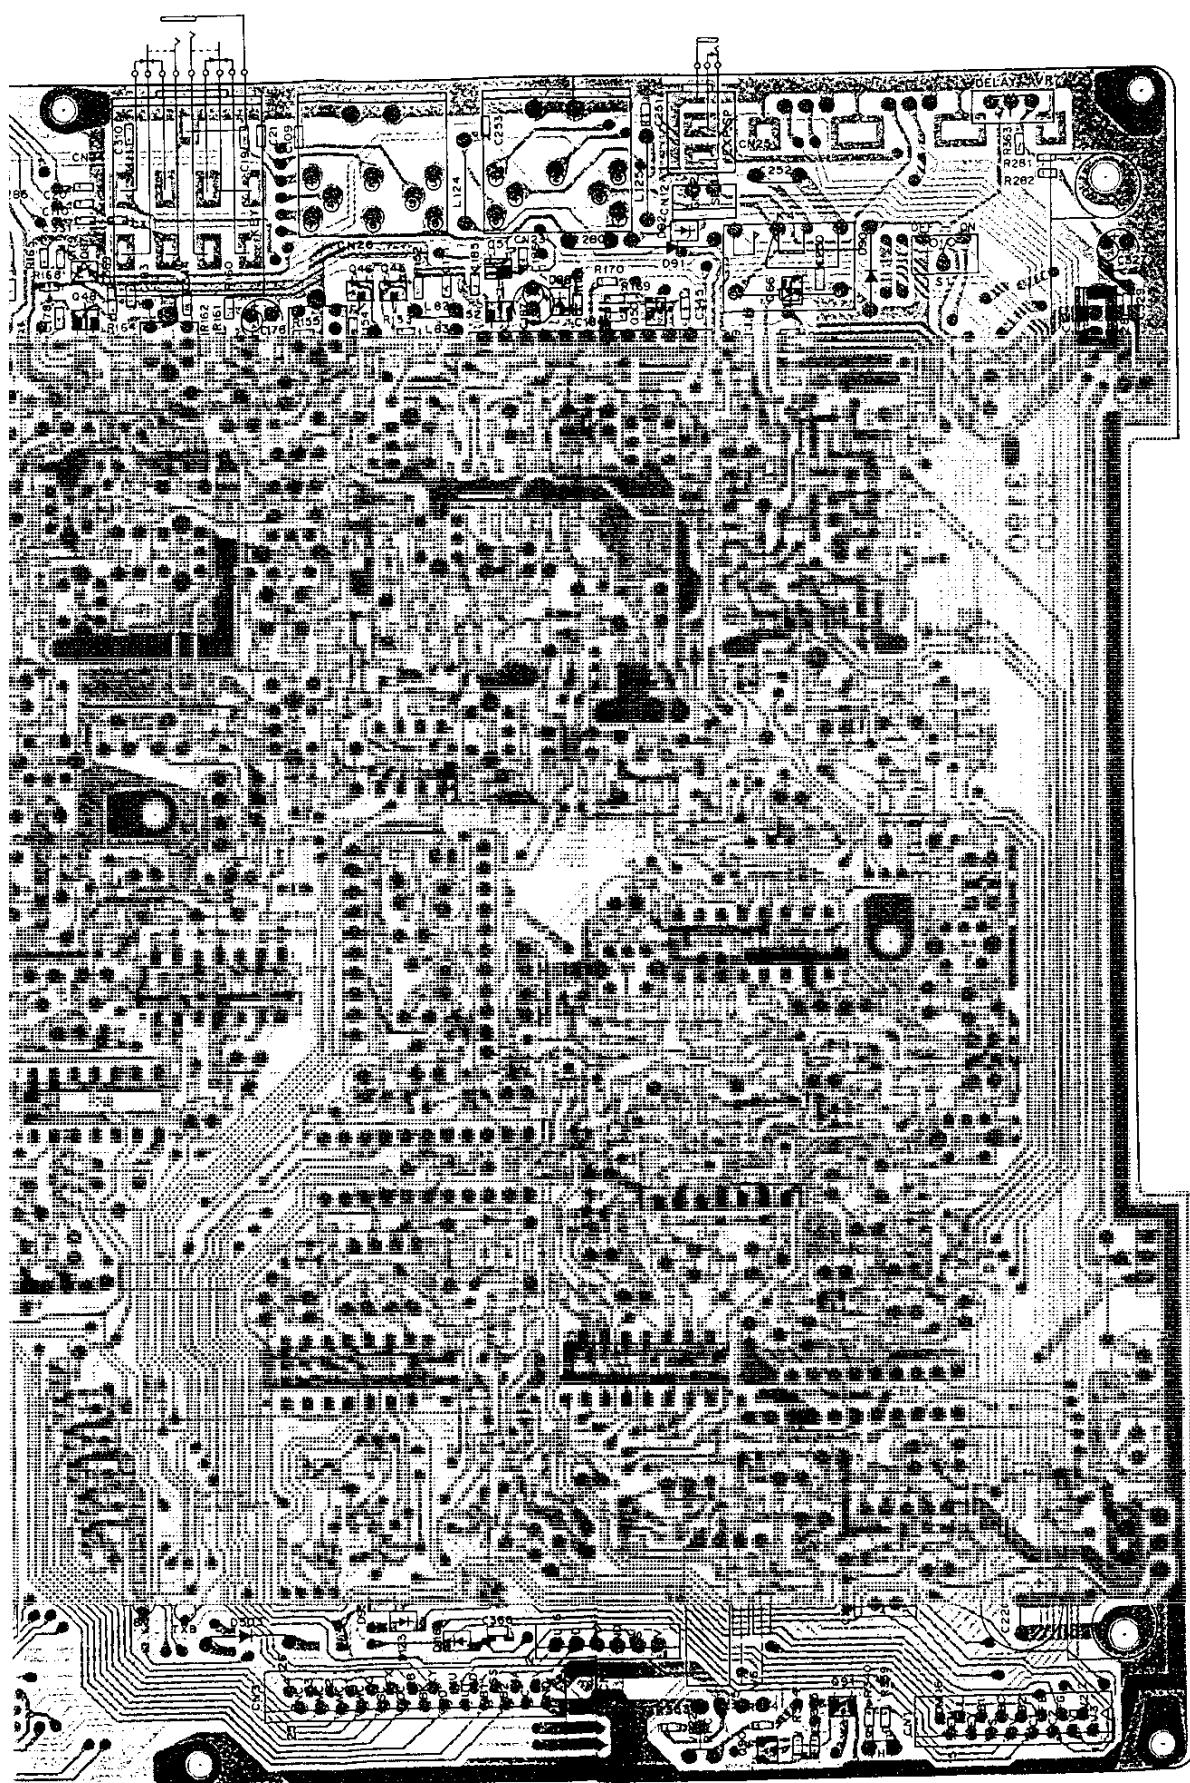

SIGNAL UNIT (X57-3190-00) Foil side view

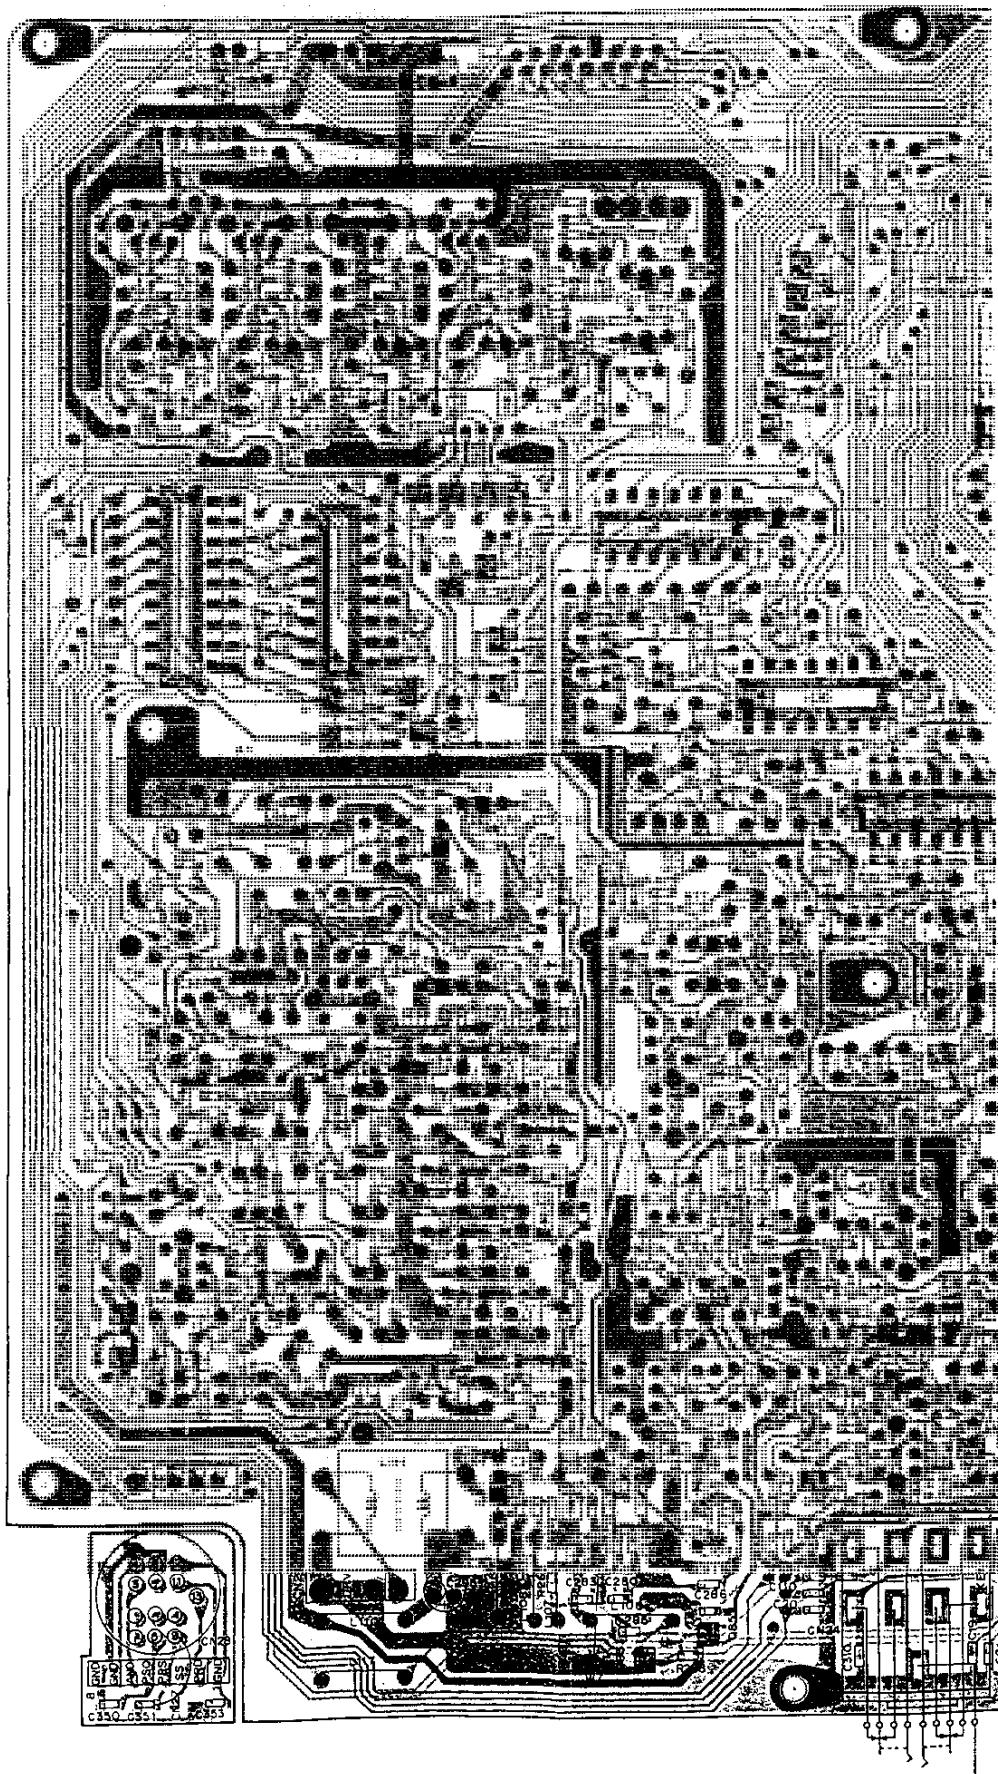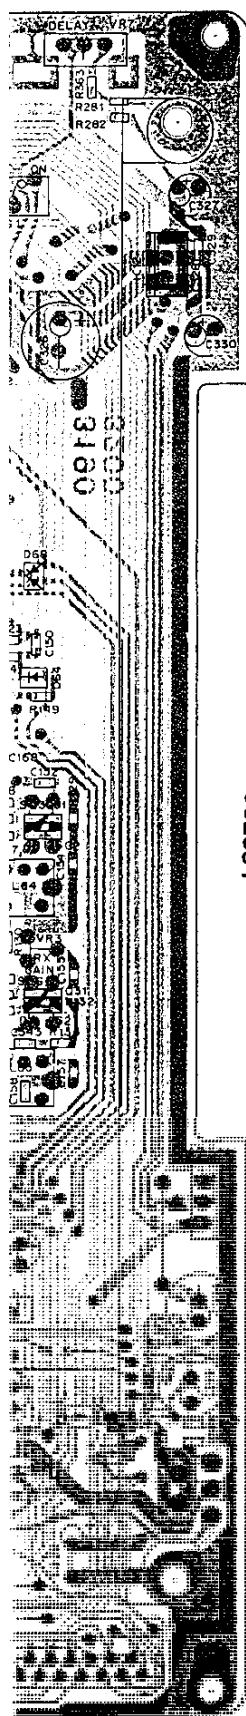


FOR SERVICE MANUALS
CONTACT:

MAURITRON TECHNICAL SERVICES


www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

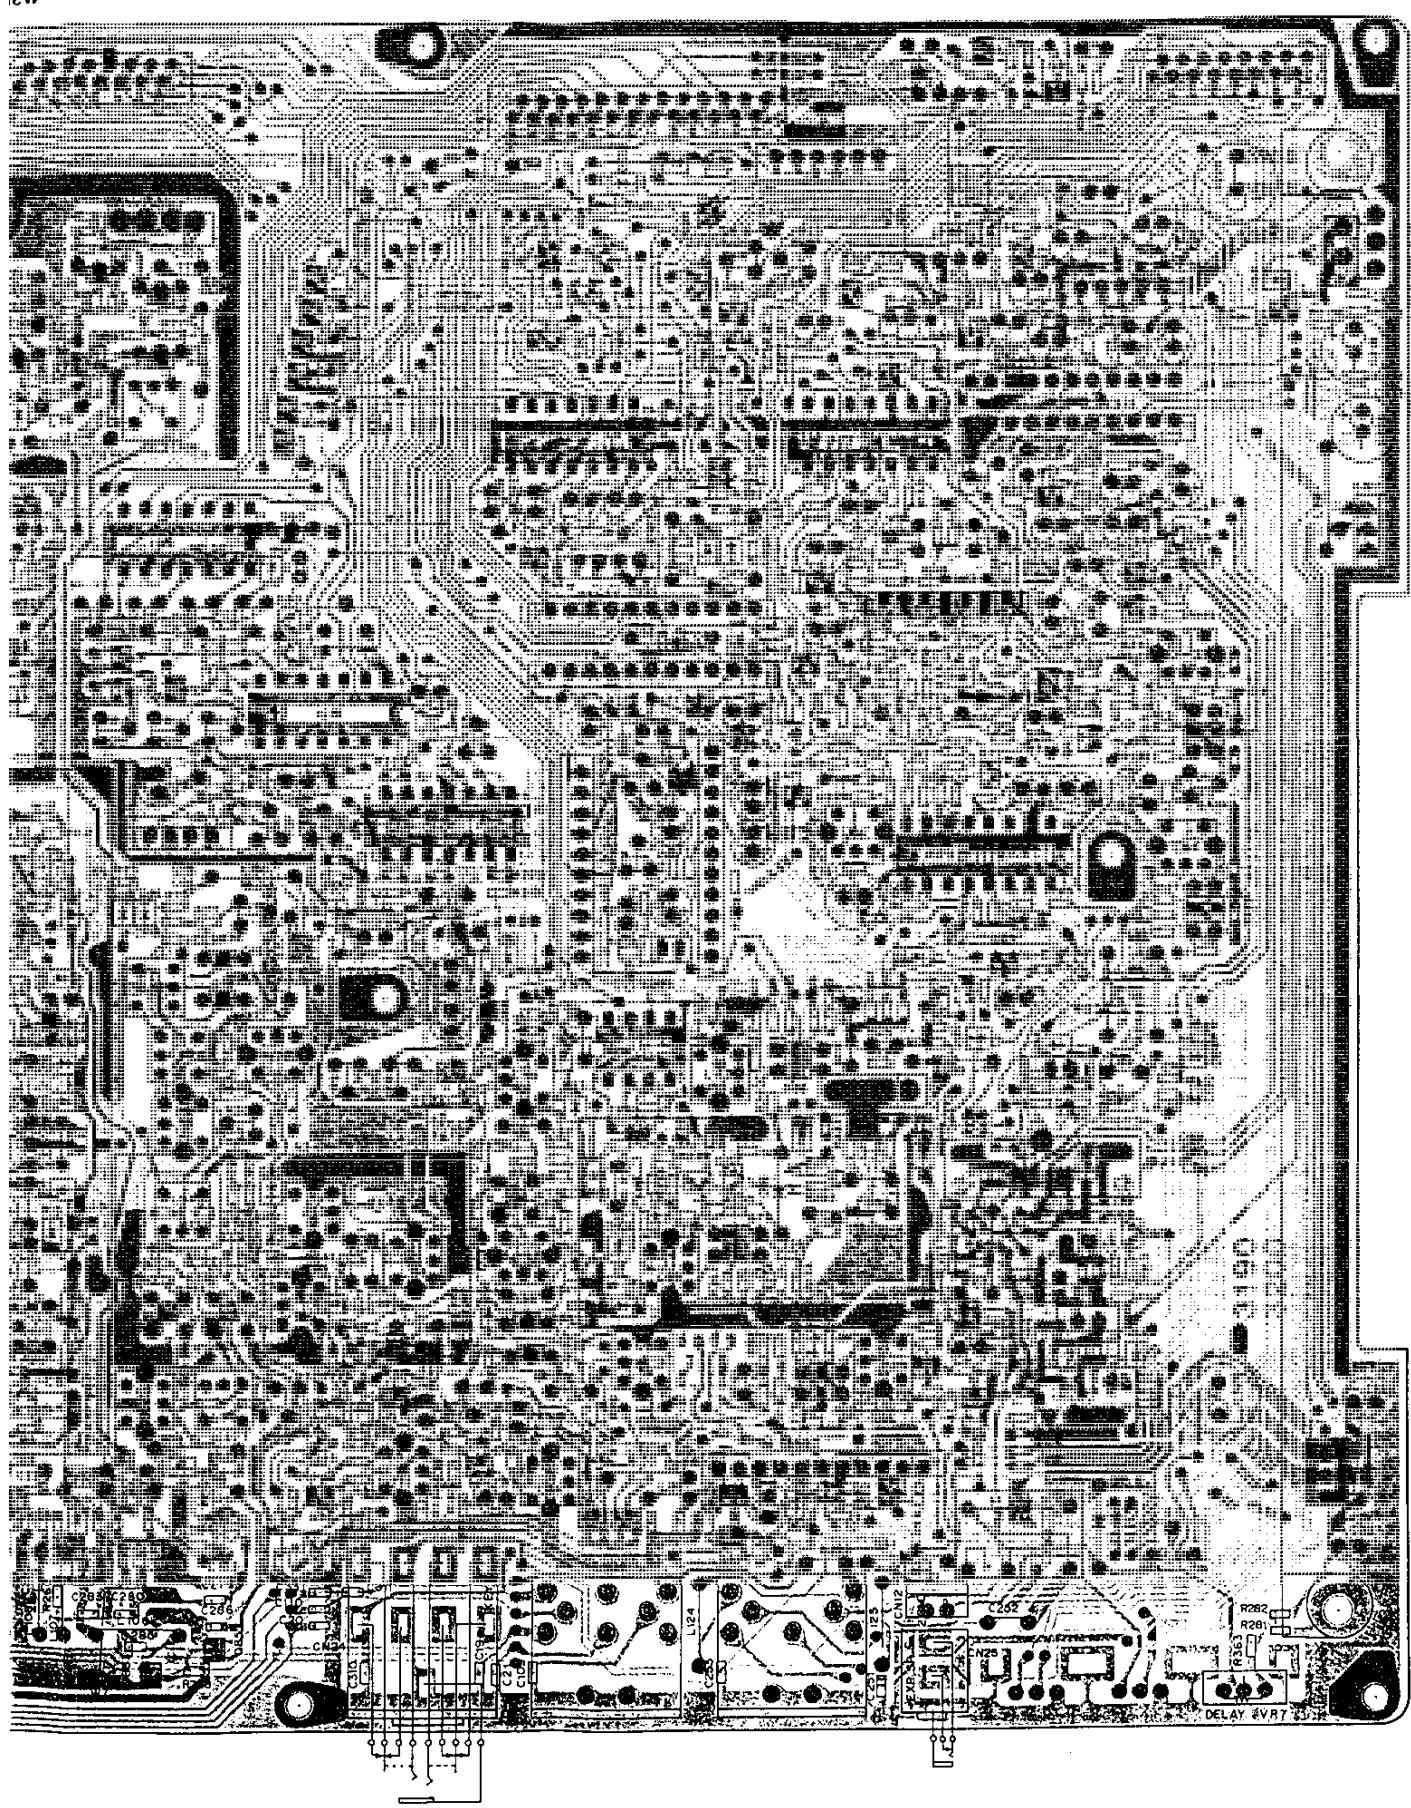

SIGNAL UNIT (X57-3190-00)

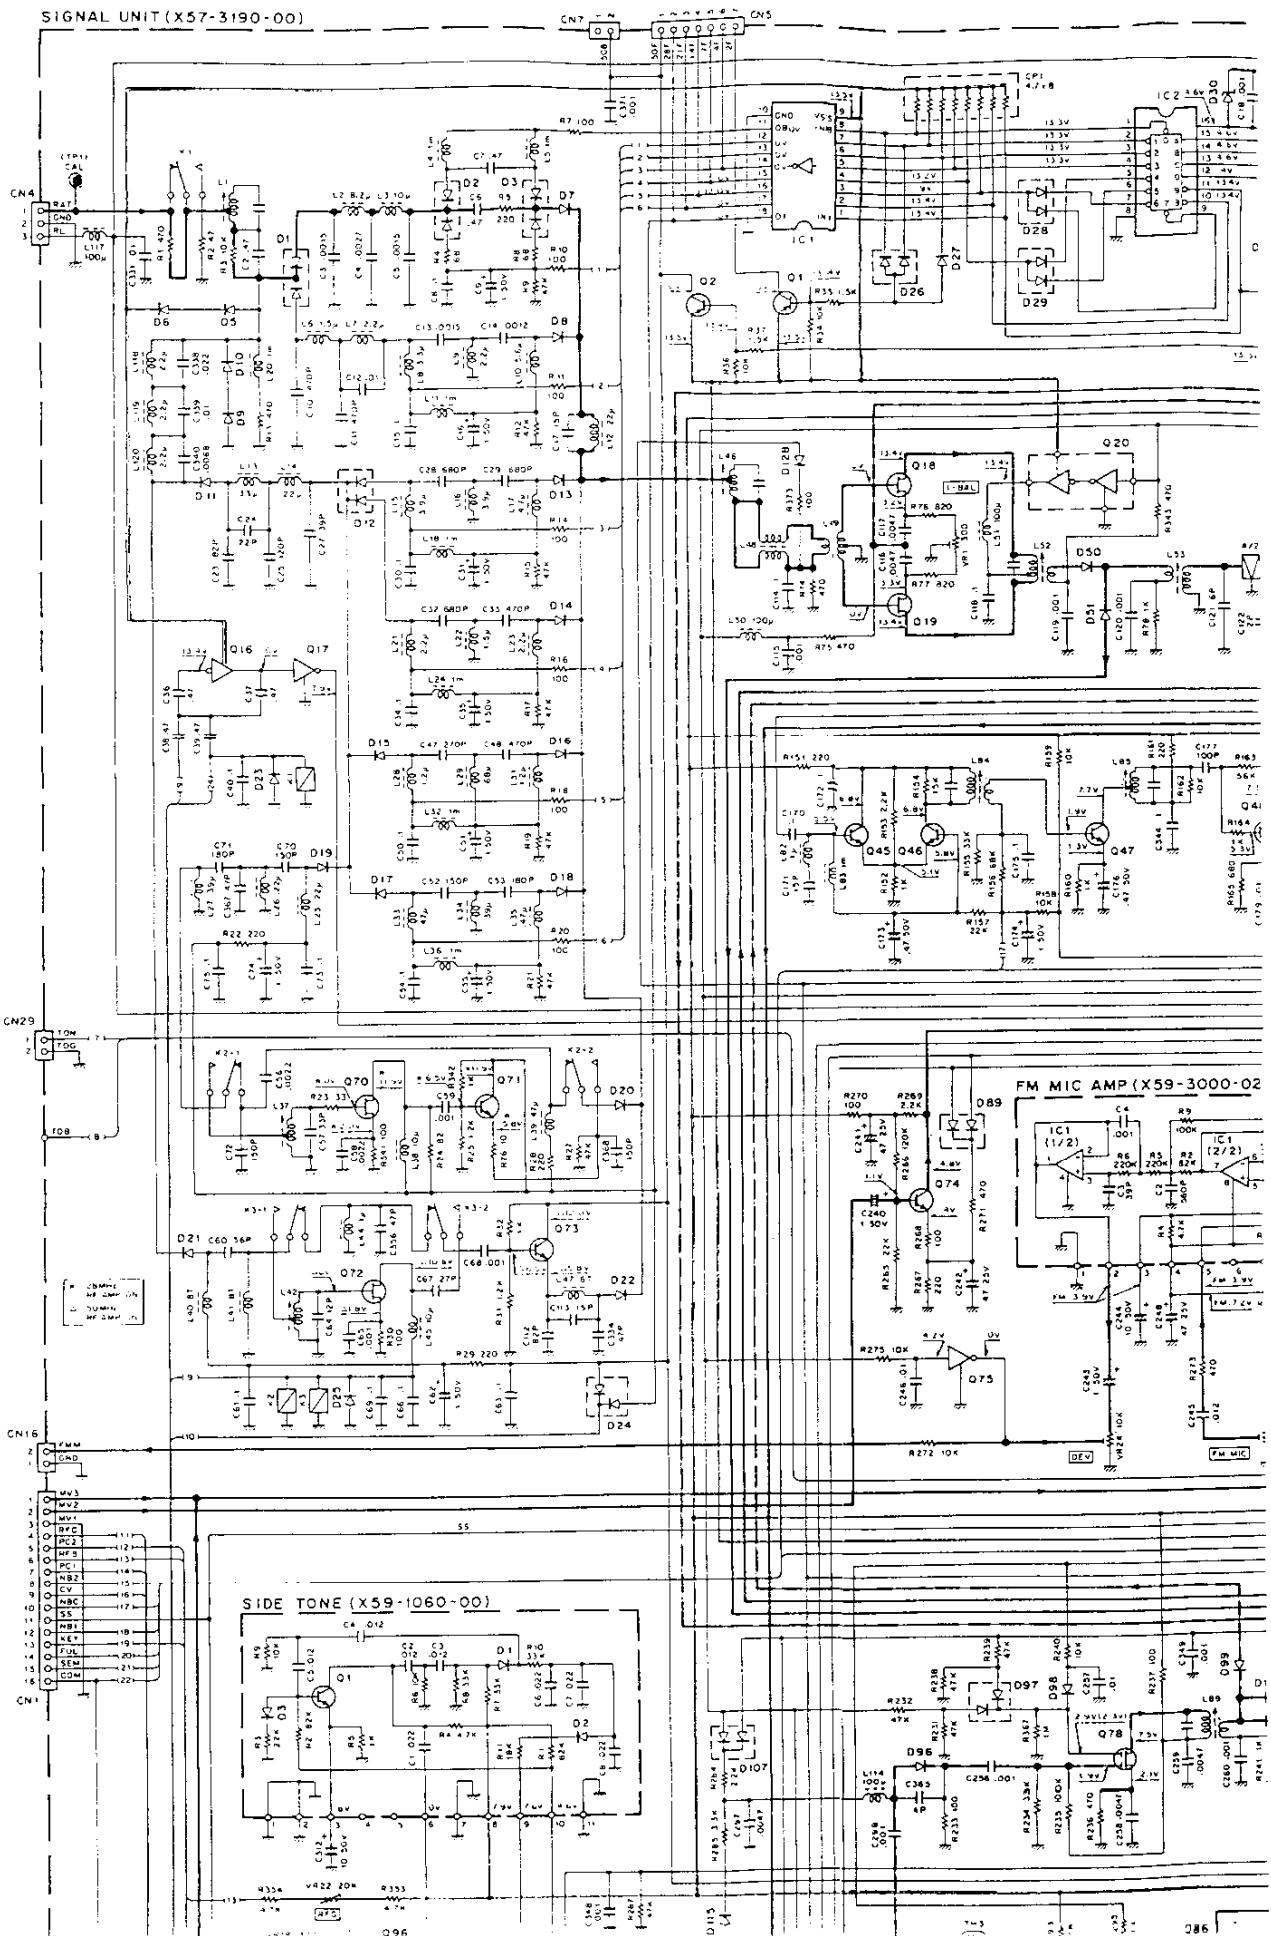

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICES


www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554

IGNAL UNIT (X57-3190-00)

SIGNAL UNIT (X57-3190-00)

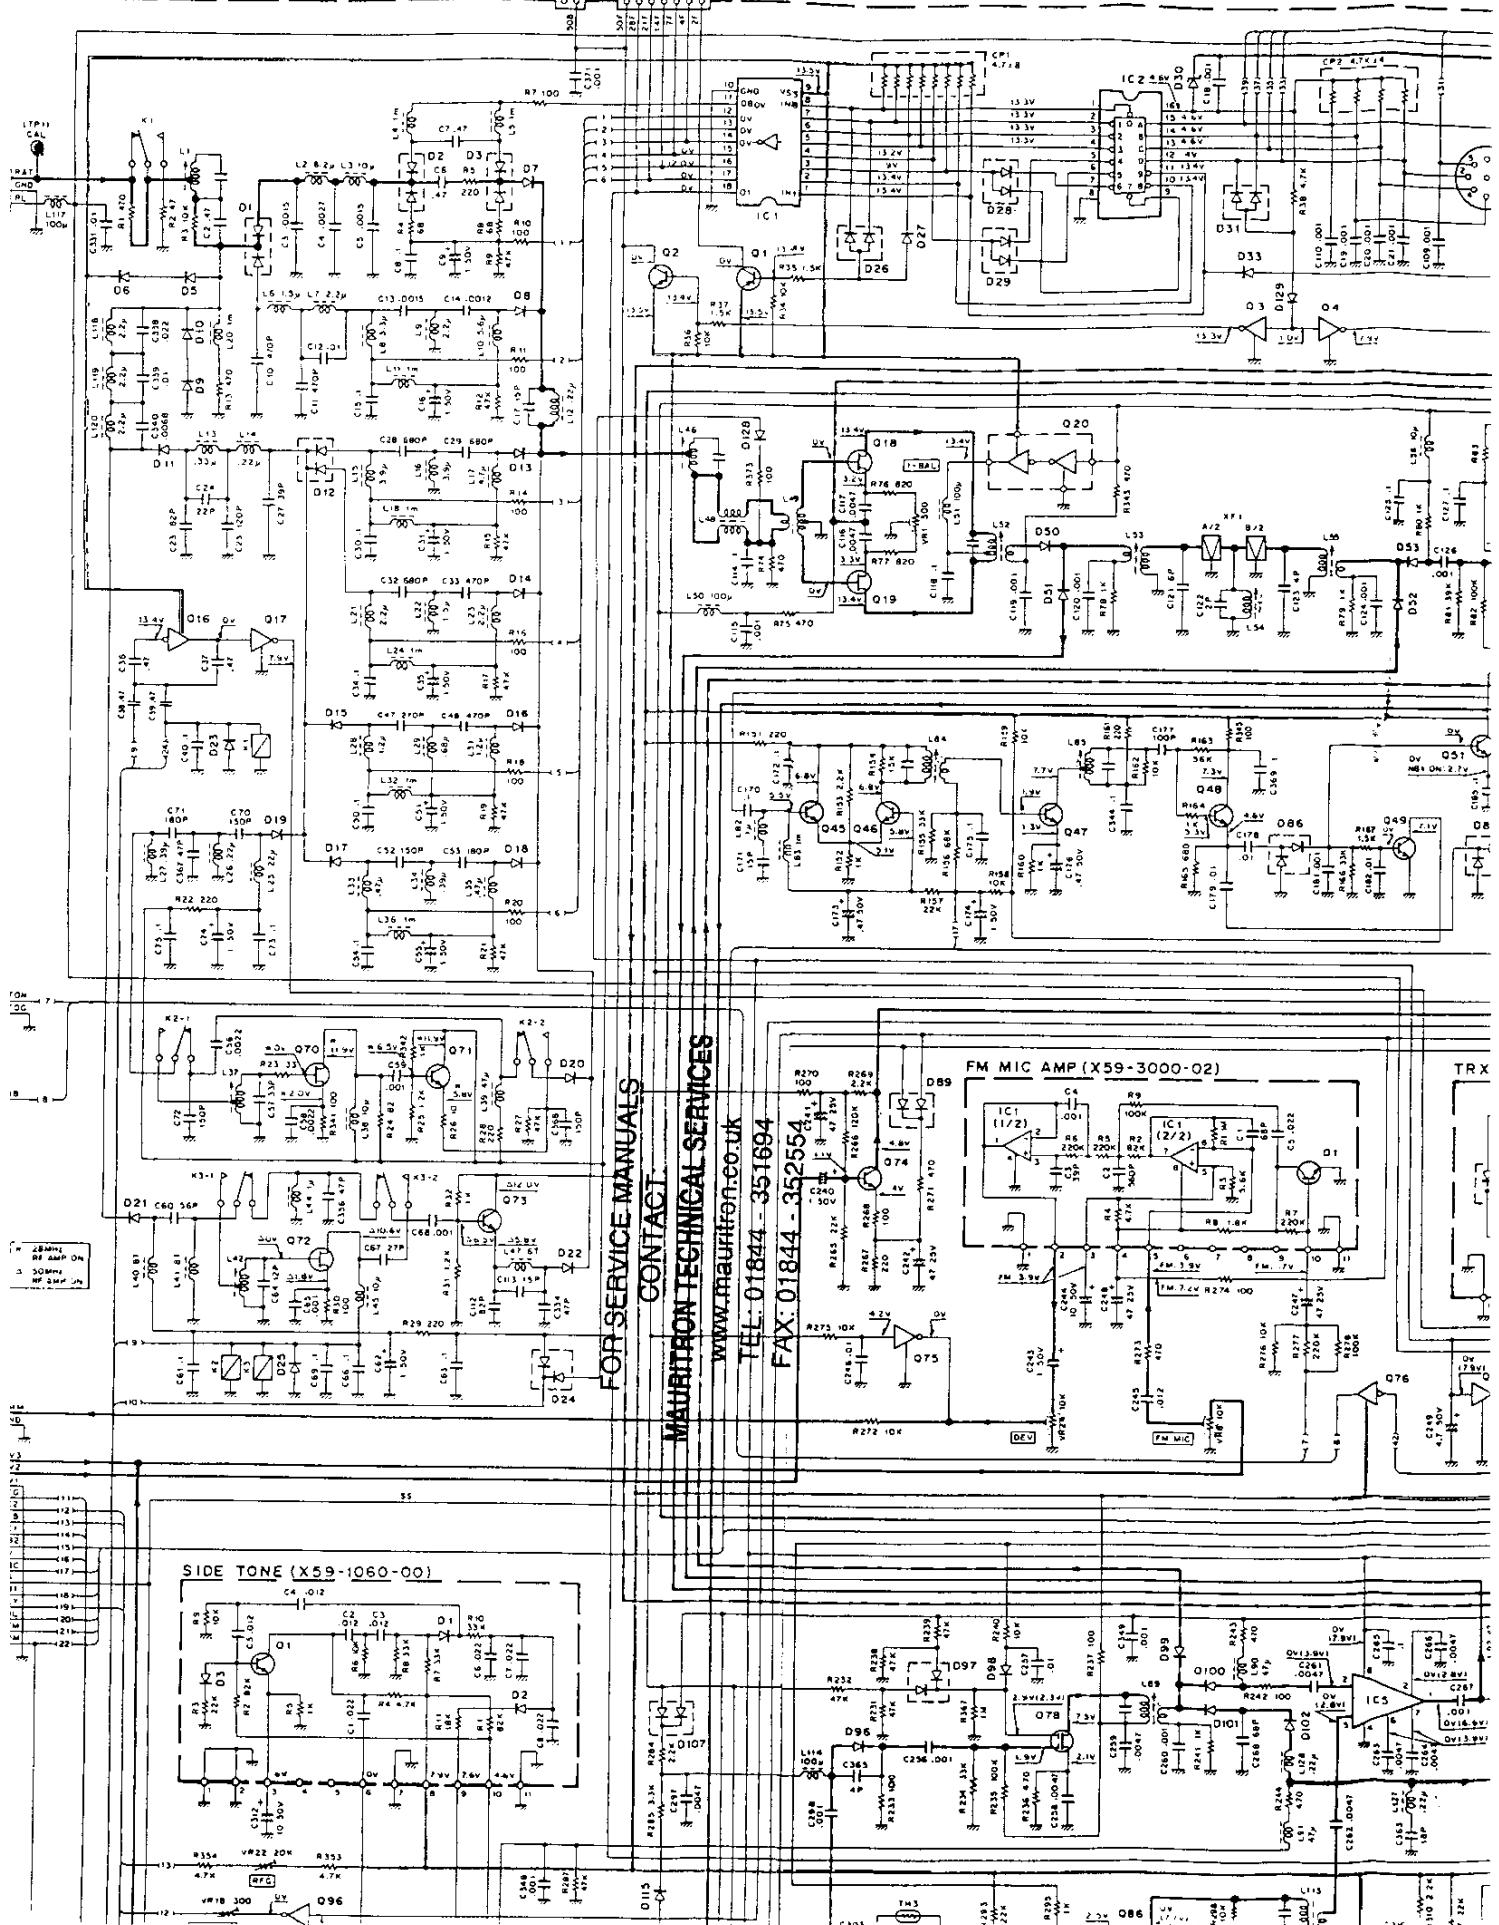




ON-SITE SERVICE MANUALS
CONTACT: www.mitsubishi-diamond.com

www.mauritsern.co.uk
TEL: 01811 222

卷之三


SA-MR-100000000000000000

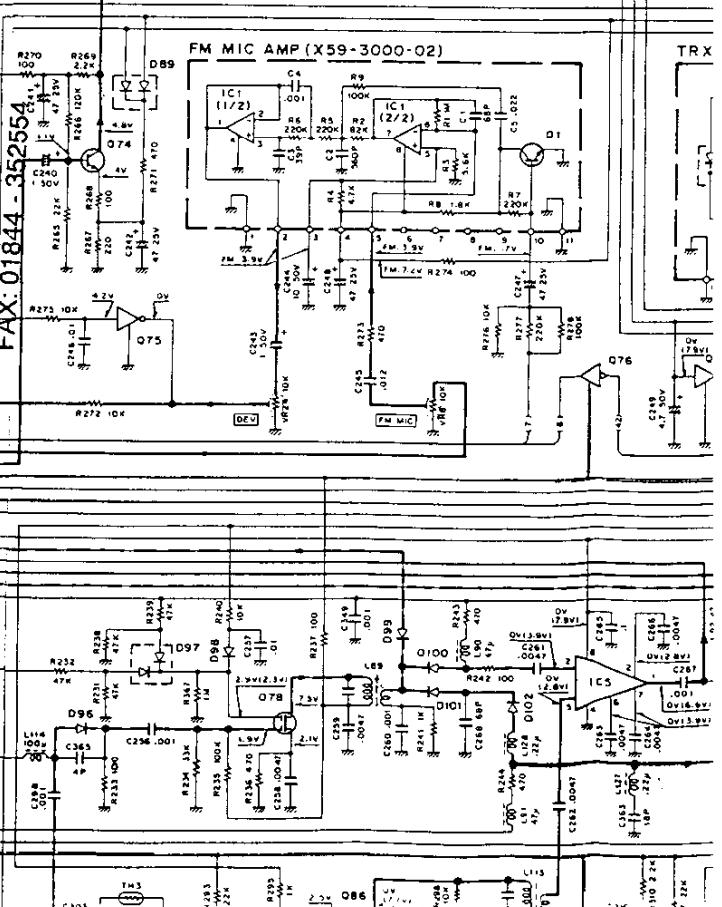

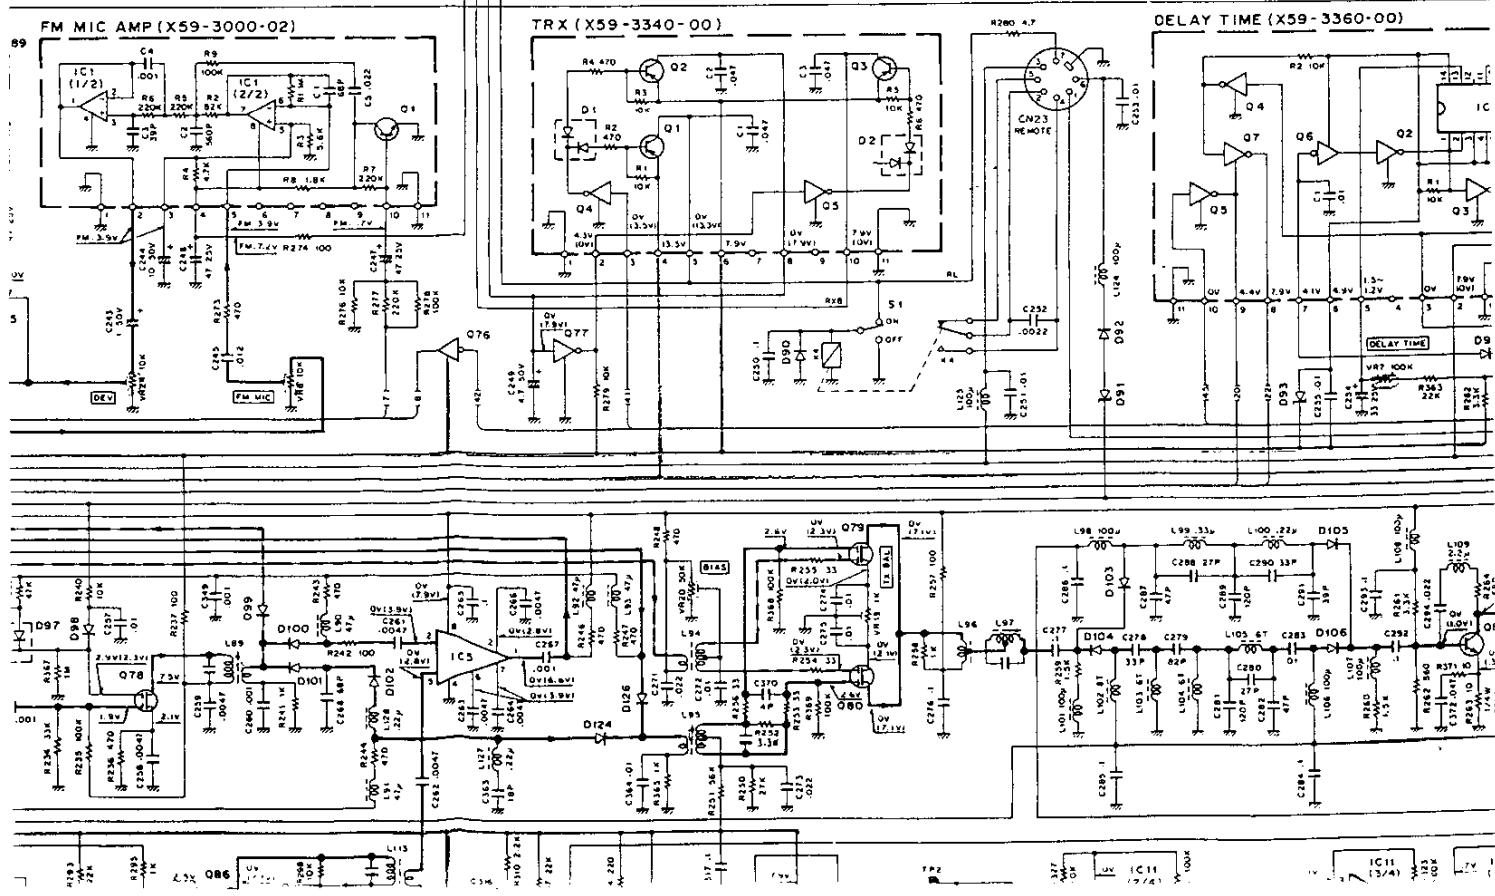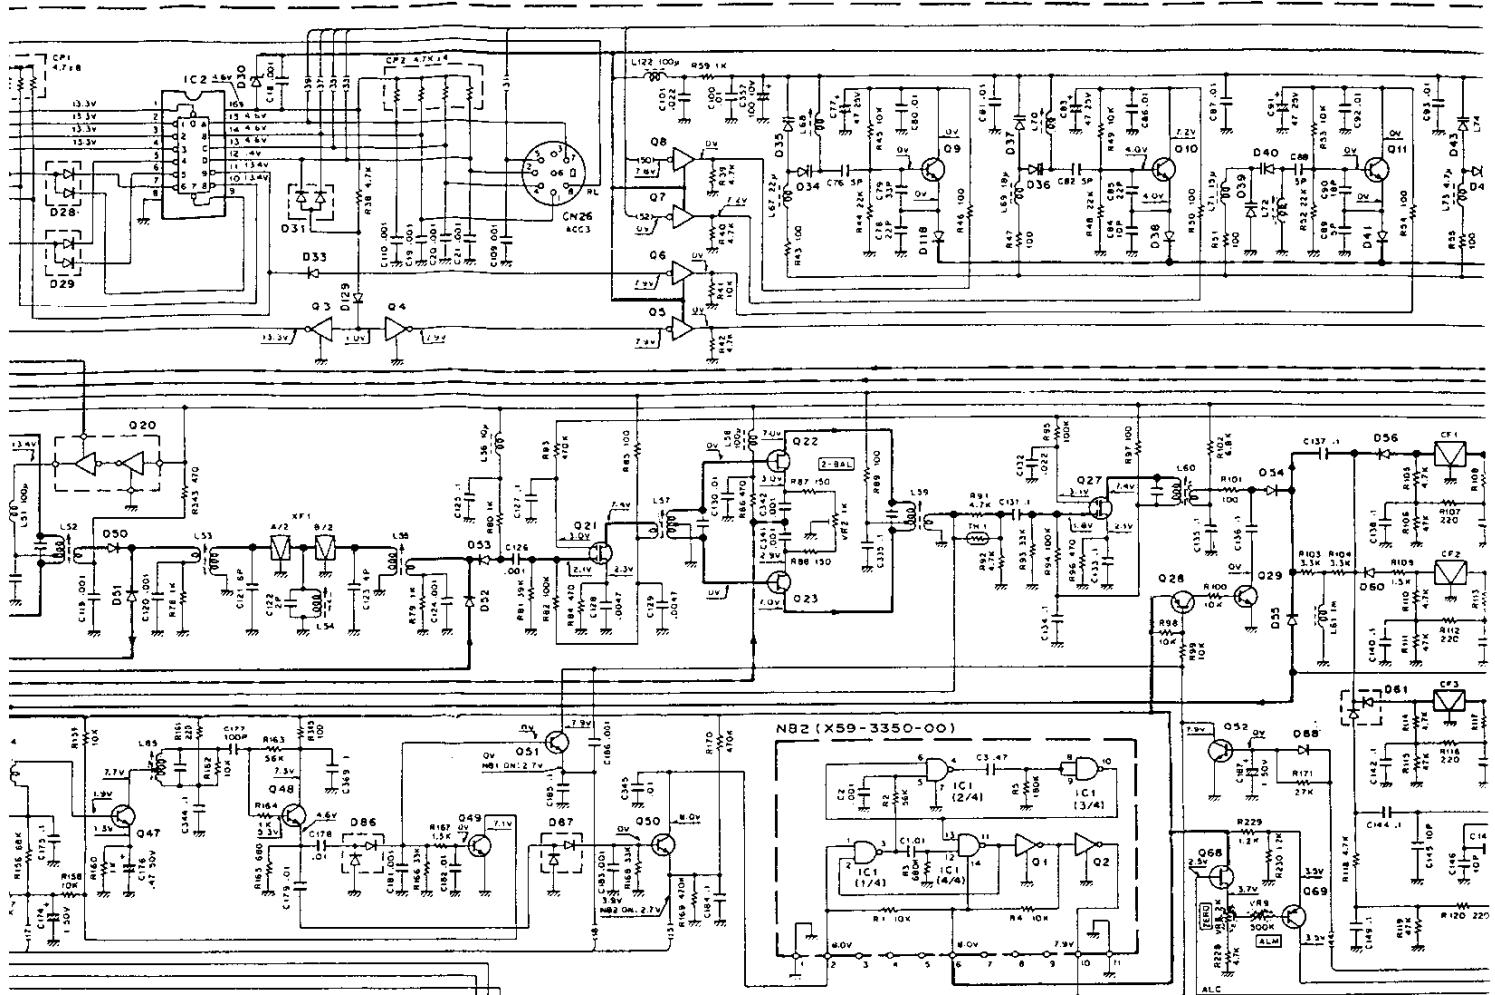


Voltage measurement condition f = 14MHz, Mode : USB. () : TX.

CIRCUIT DI

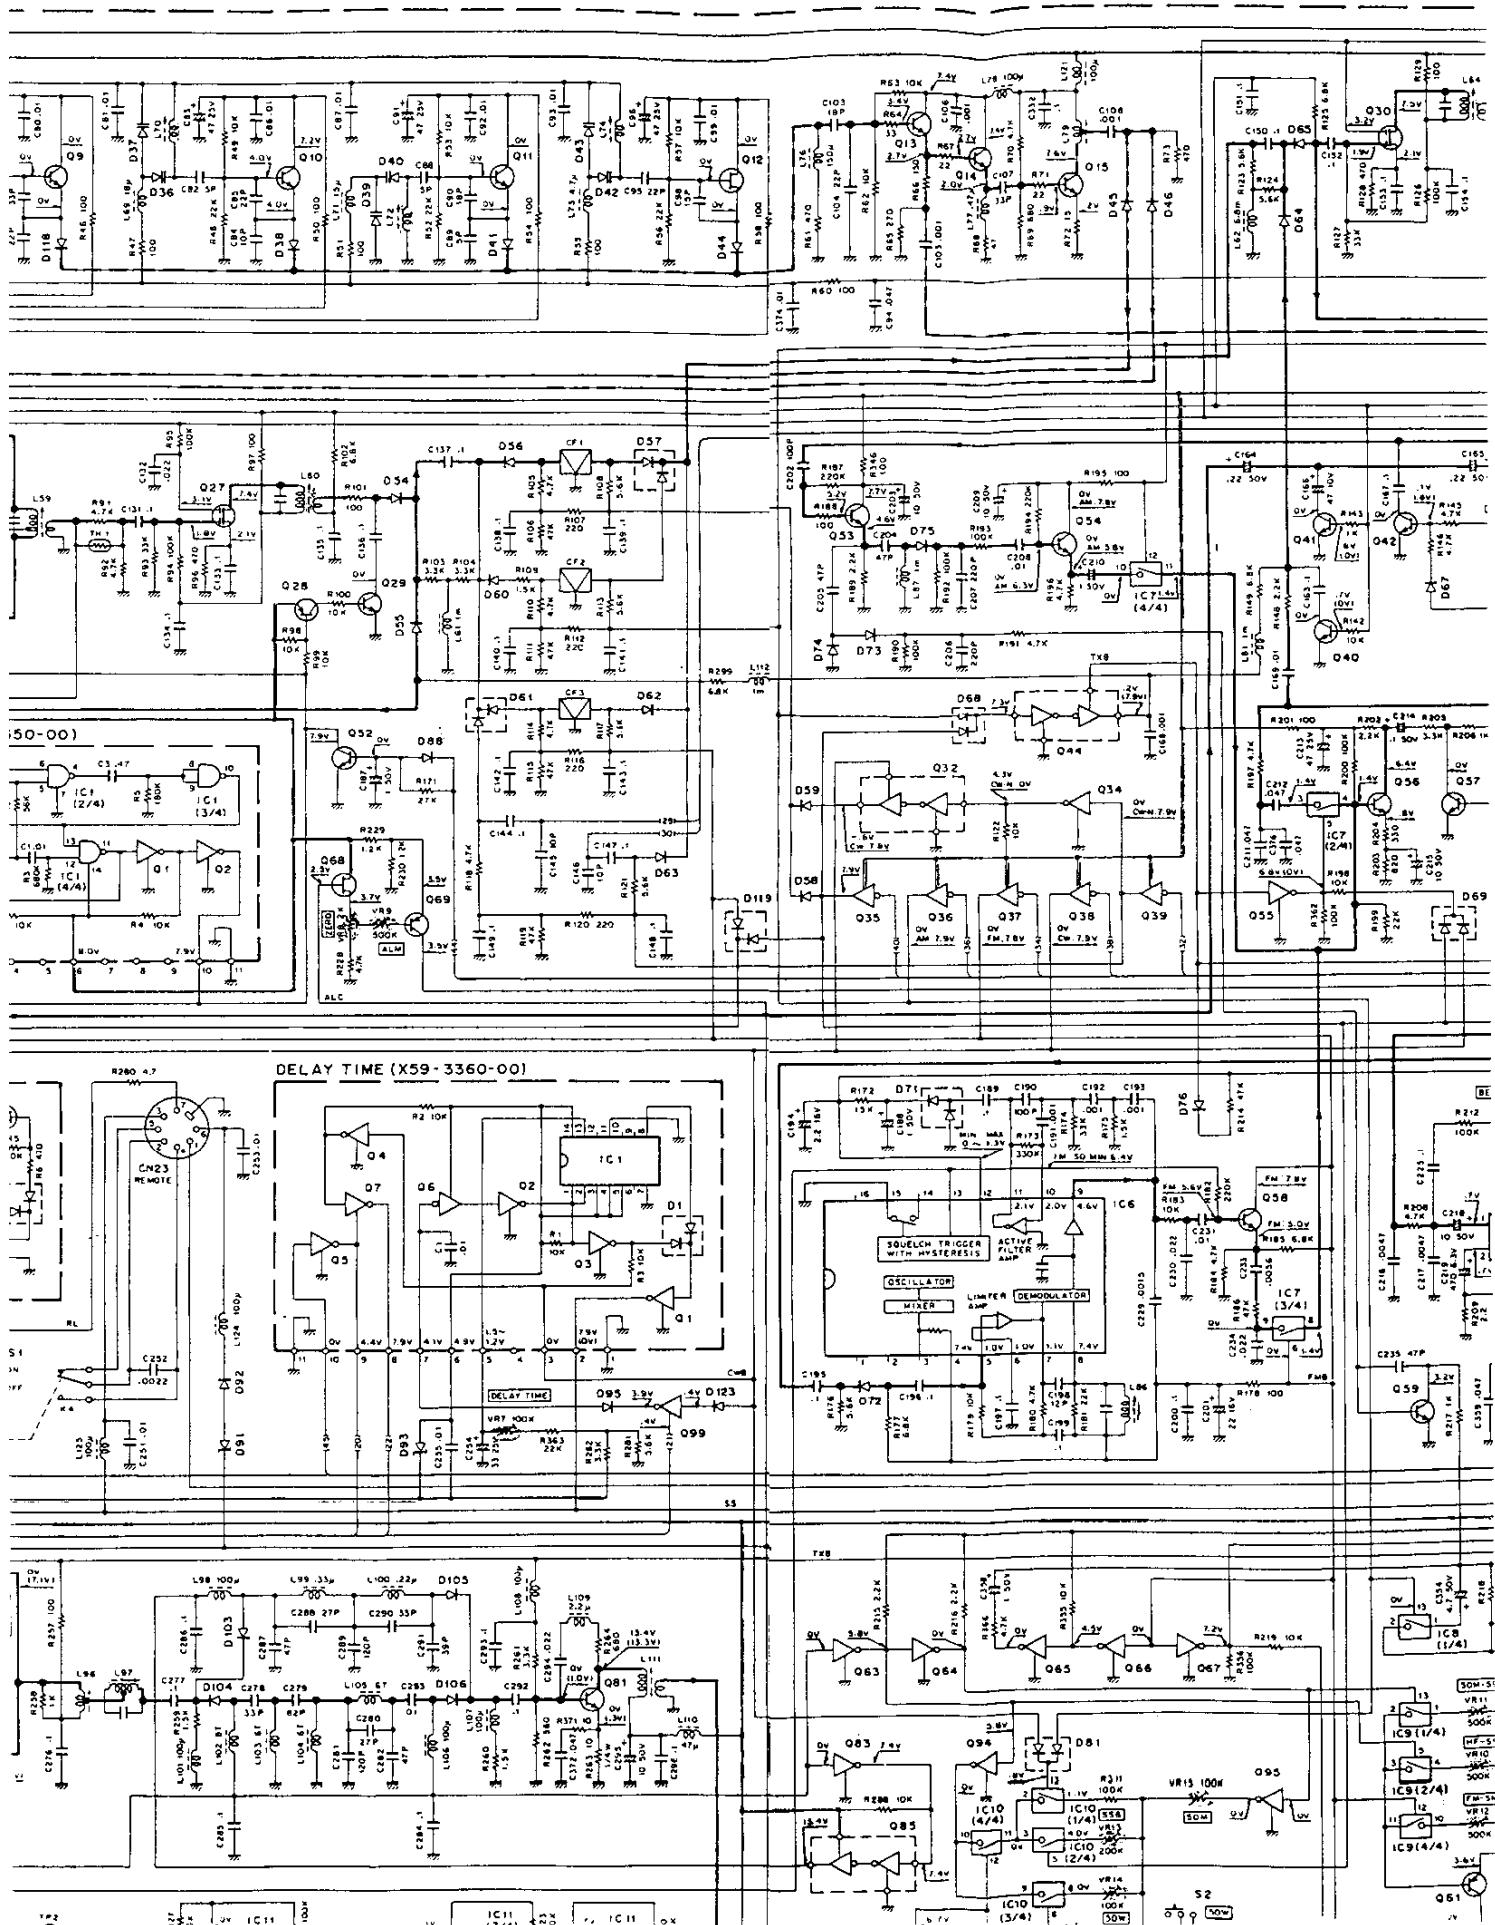

CIRCUIT DIAGRAM (TS-680S) TS-140S/680S

= 14MHz, Mode : USB. () : TX.

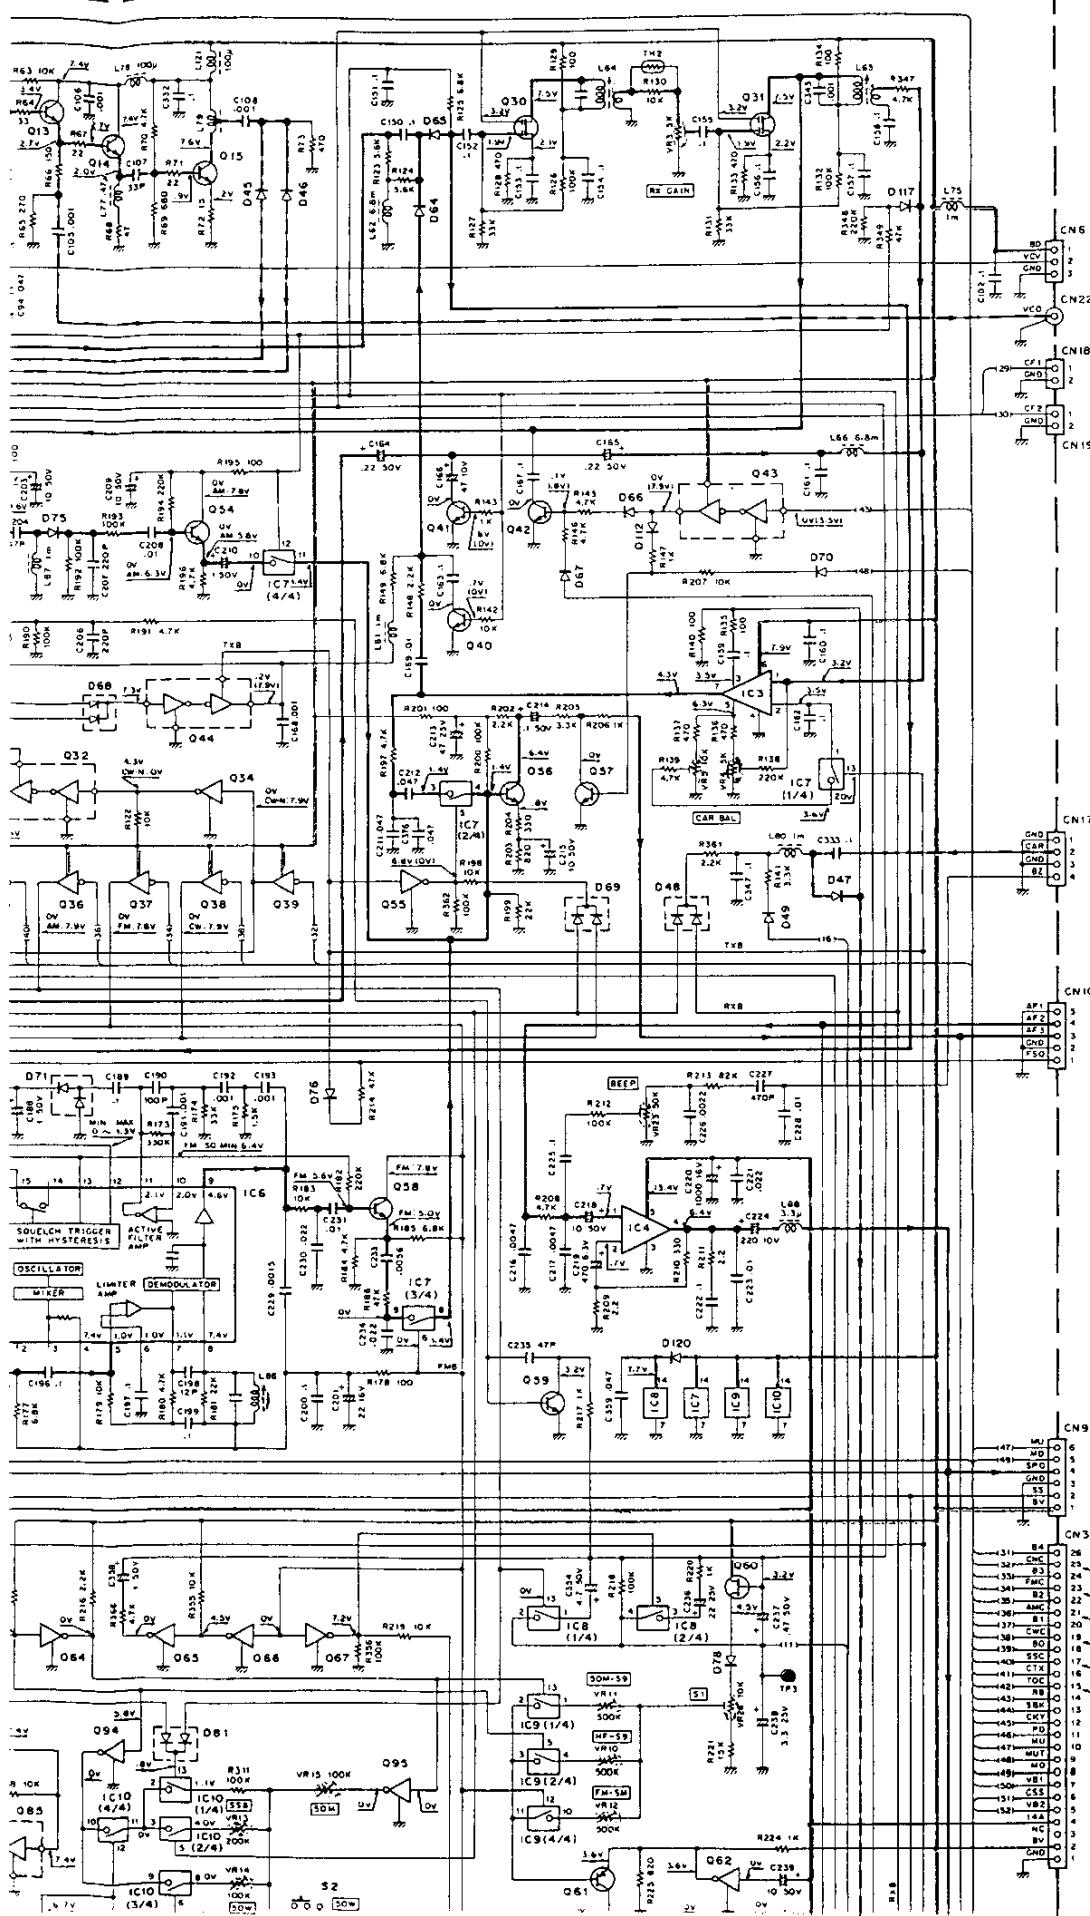

FOR SERVICE MANUALS

MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

(X57-3190-00)
Q1,2,26,61,69,87,90 : 25A1162(Y)
Q3,4,17,34,55,63,65~67,75,77,
83,84,91,92,96,97,99

Q3~8,35~39,76 : DTC114EK
Q9~11,13 : DTA143EK
Q12 : 2SC2668(Y)
Q14,71,73 : 2SC1907
Q15,81 : 2SC2053
Q16 : OTA114EK
Q18,19,22,23,70,72 : 2SK125-3
Q20,32,43,44,82,85,88 : FMC3
Q21,79,80 : 3SK122(L)
Q27,30,31,78,86 : 3SK73(GR)
Q29,40~42,43~54,56~59,
74,89,98 : 2SC2712(Y)
Q60,68 : 2SK192A(Y)
Q62,64,93~95 : OTC114TK

IC1 : M54581P
IC2 : M74LS14SP
IC3 : AN612
IC4 : μPC2002V
IC5 : SN16913P
IC6 : MC3357P
IC7~10 : TC4066BP
IC11 : LM324N
IC12 : AN7808

D1~3,12 : DAN355K
D5,10 : US1090
D6,9 : V08(G)
D7,8,11,13~22,38,41,44~46,
50~53,99~106,109,110,118,
122,124,126 : RLS135
D23,25,90 : IS1555
Q24,48,57,61,68,69,77,
79~81,85,89,97,107,119 : DAN202K
D26,28,29,31 : DAP202K
D27,33,49,54~56,58~60,
62~67,70,72~74,76,78,83,
89,92,95,108,112~15,
117,120,123,128,129 : RL573

D30,93 : UZ-3.08

D34~37,39,40,42,43 : ITT10TE

Q47,96 : MI204

D71,82,86,87 : HSM88AS

D91 : MTZ91JB


KB-369

D116,125 : RLZ3.6B


Q75,98 : IN60APSPA

D127 : 155133


TH1~4 : 112-502-2

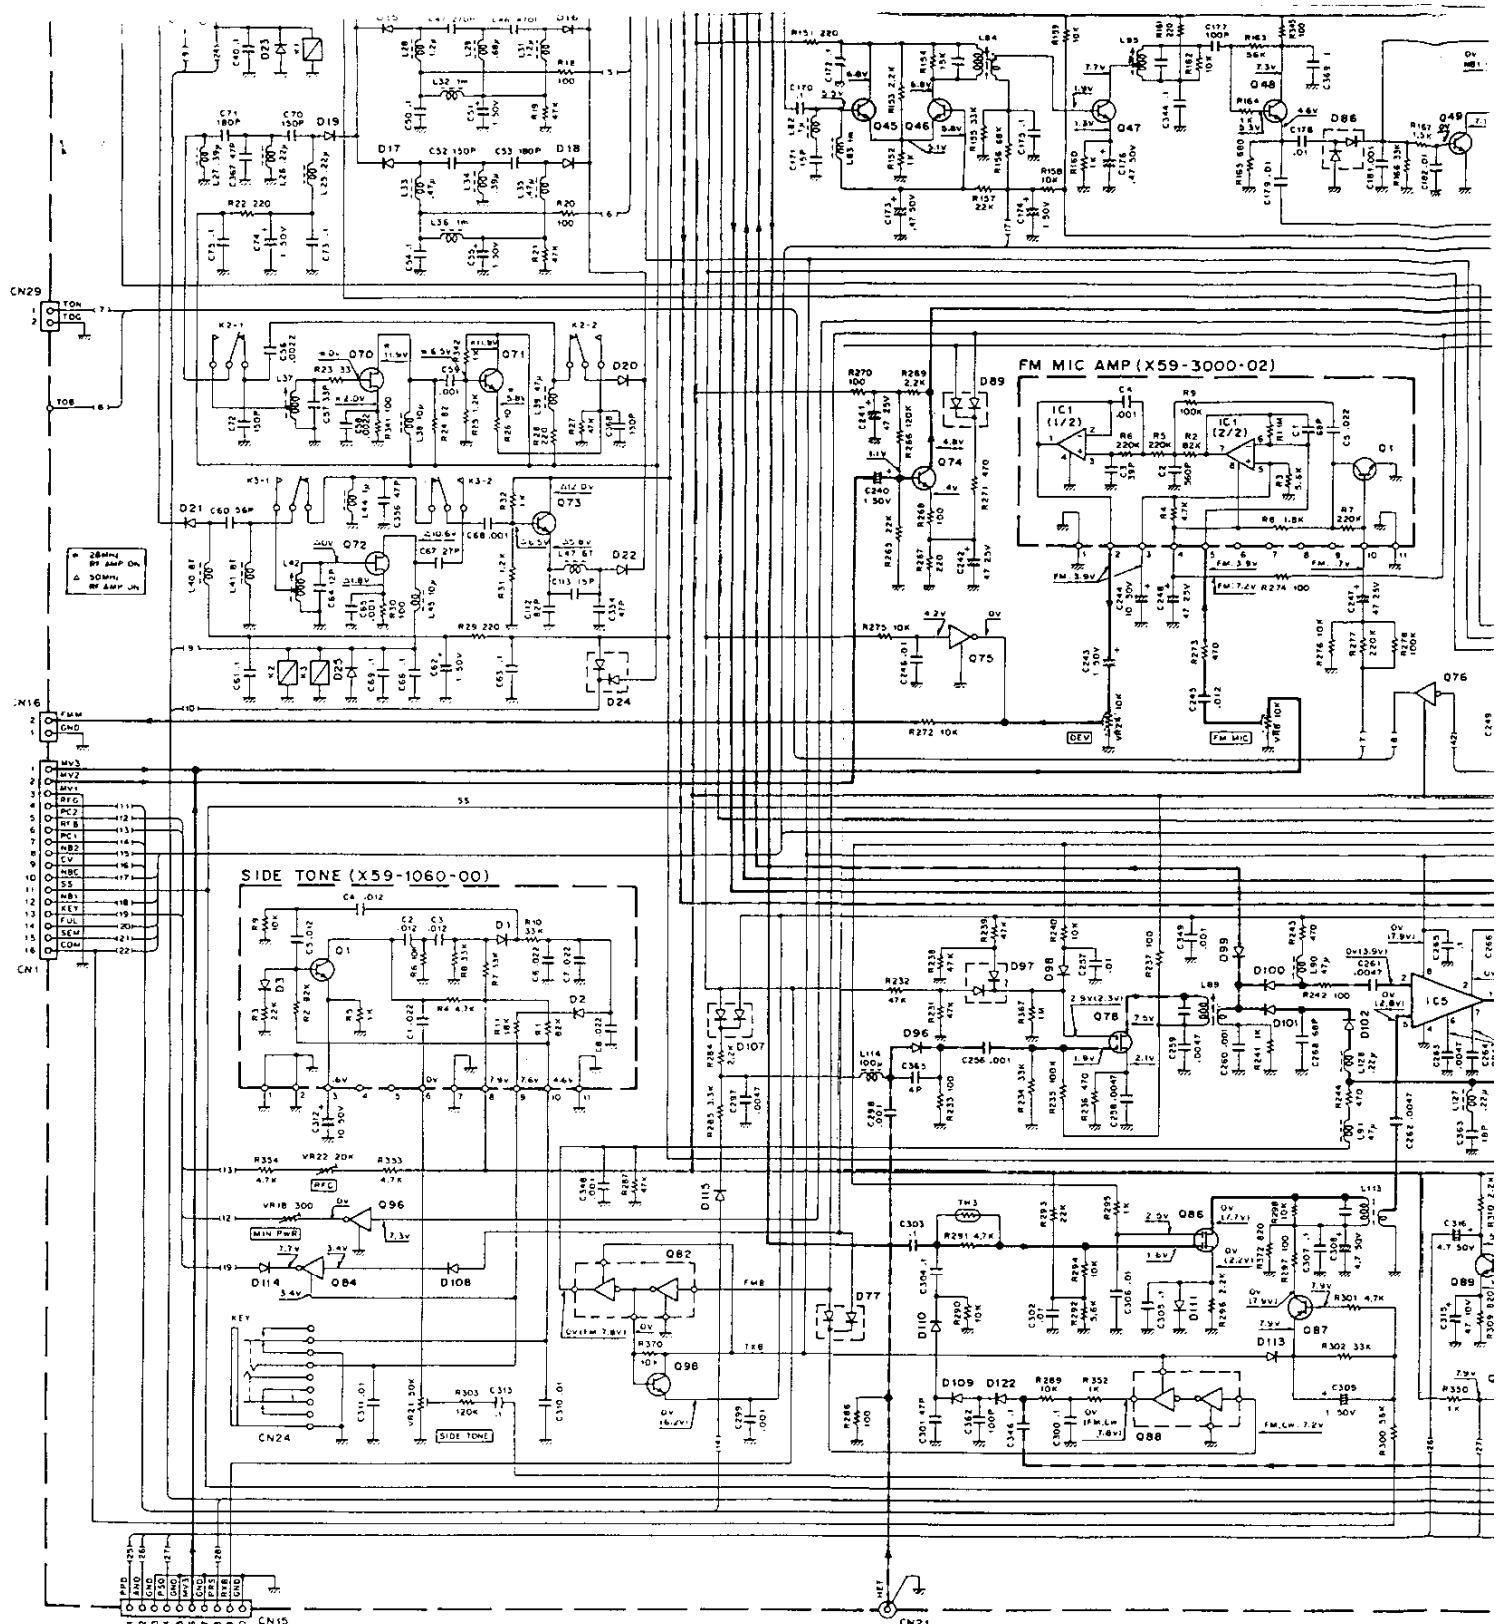


74LS145P




μPC2002V




SN16913P



MC3357P




AN7808




AN612




TC4066BP




C4011BF




MB74LS122




M54581P




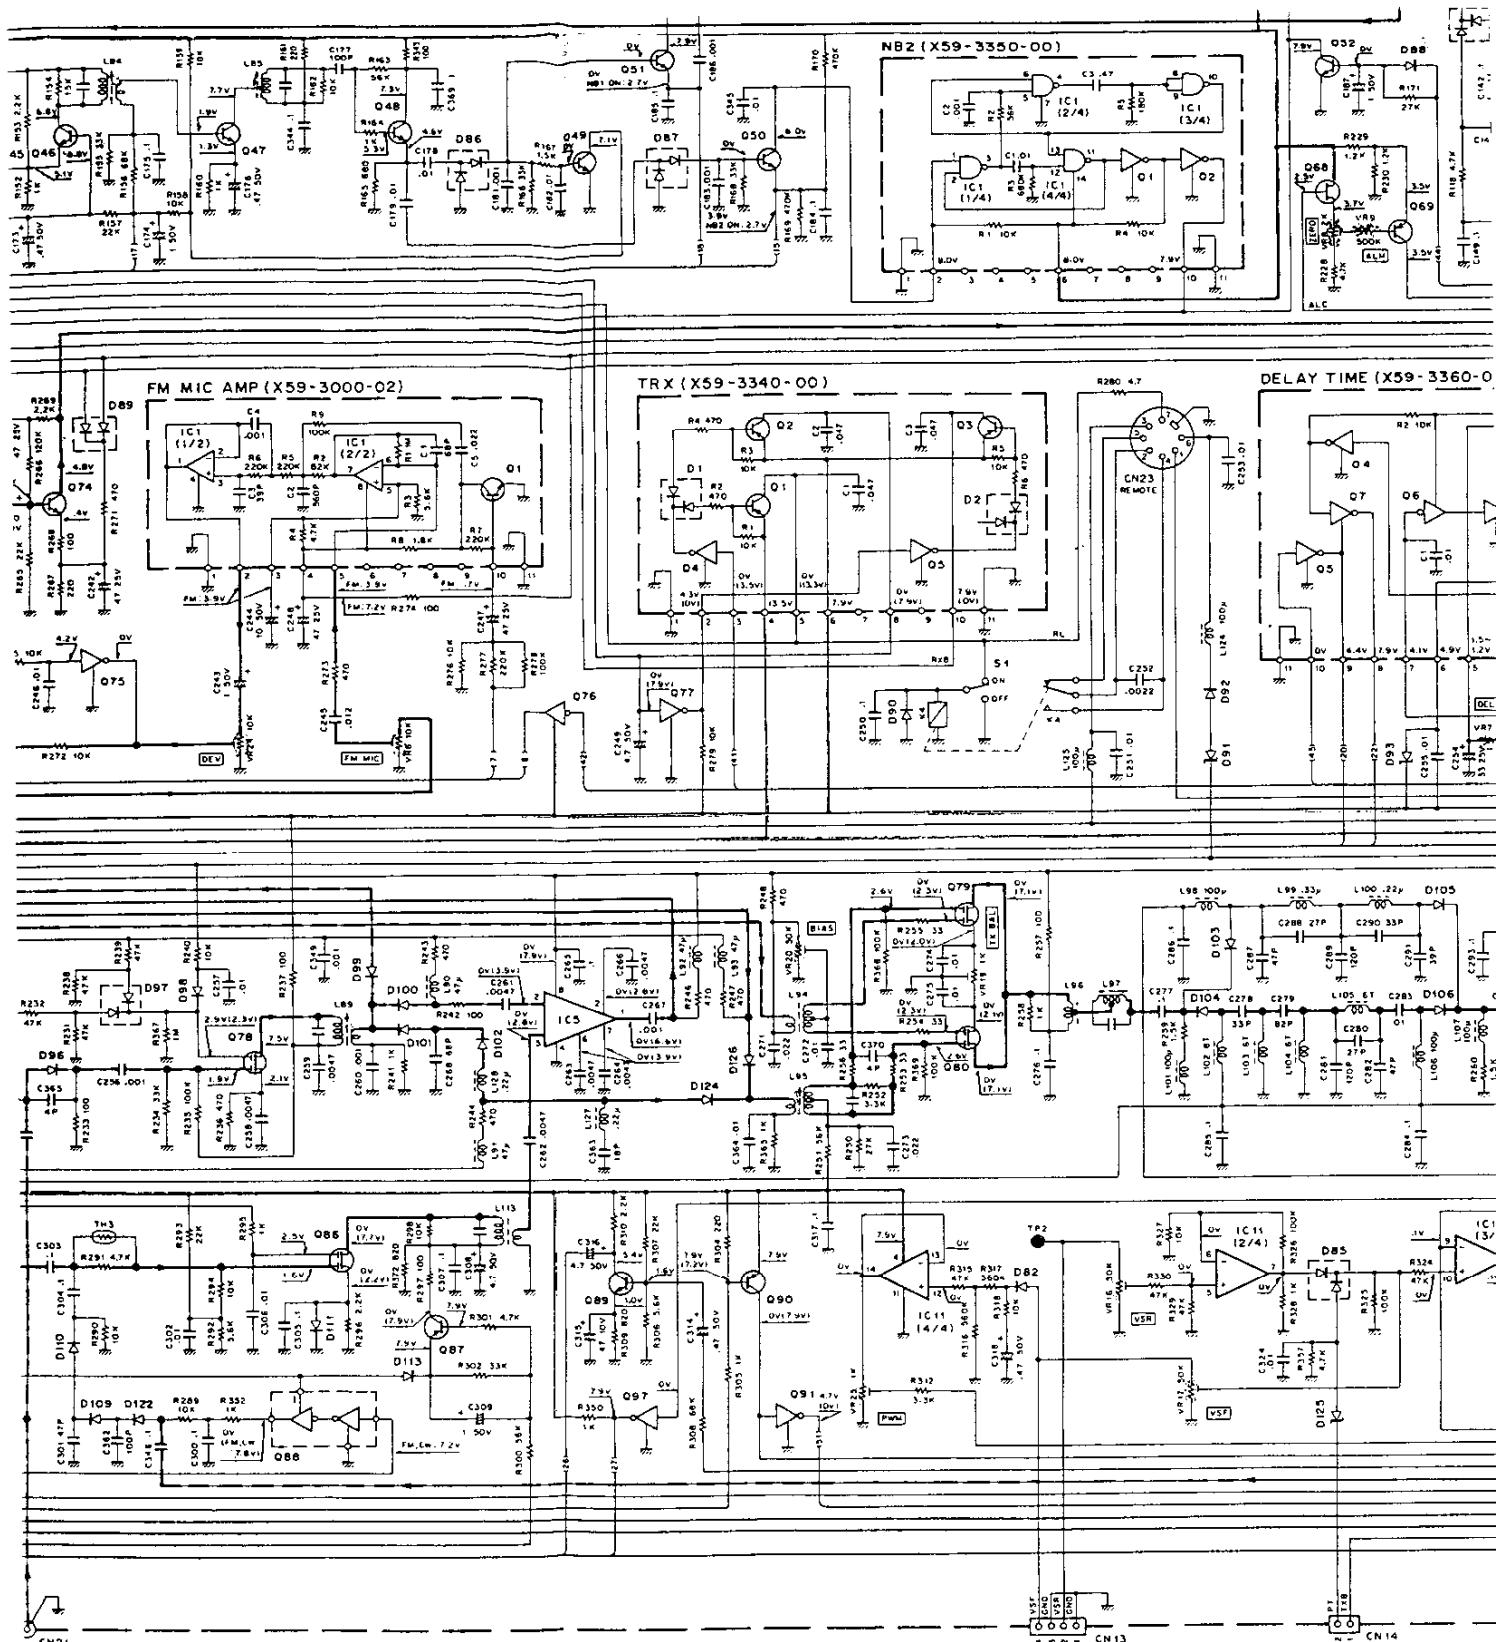


AN7808




AN612



TC4066BP




LM324N


2SA1162(Y)
2SA1182(Y)


2SC2712(Y)
DTA114EK
DTA143EK
DTC114EK
DTC114TK

2SC2053



2SC1907




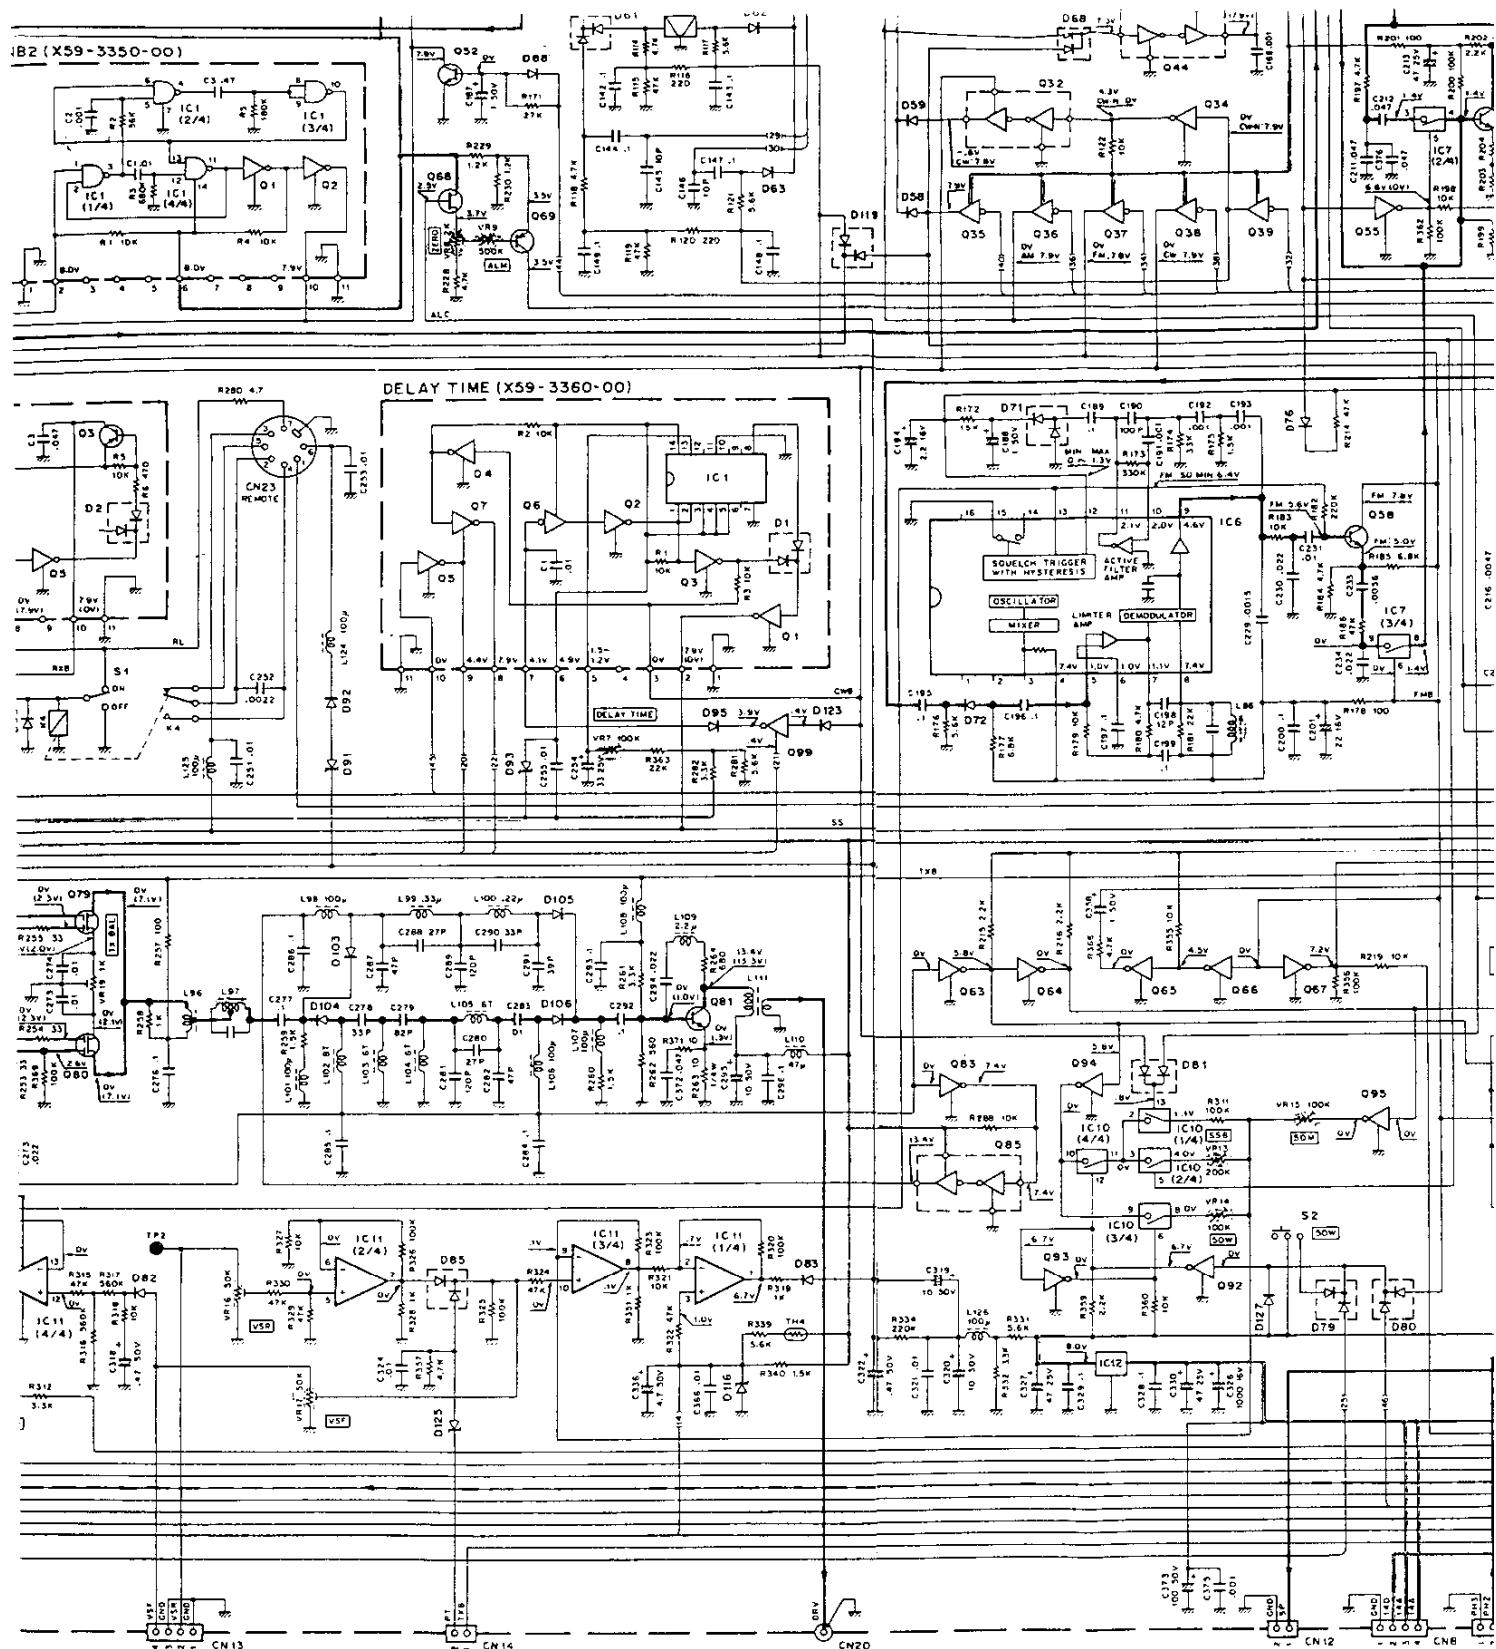


A1162(Y)
A1182(Y)
C2712(Y)
A114EK
A143EK
C114EK
C114TK




2SC2053




2SC1907




2SK125-5




FMC3




3SK122(L)



3SK73(GR)



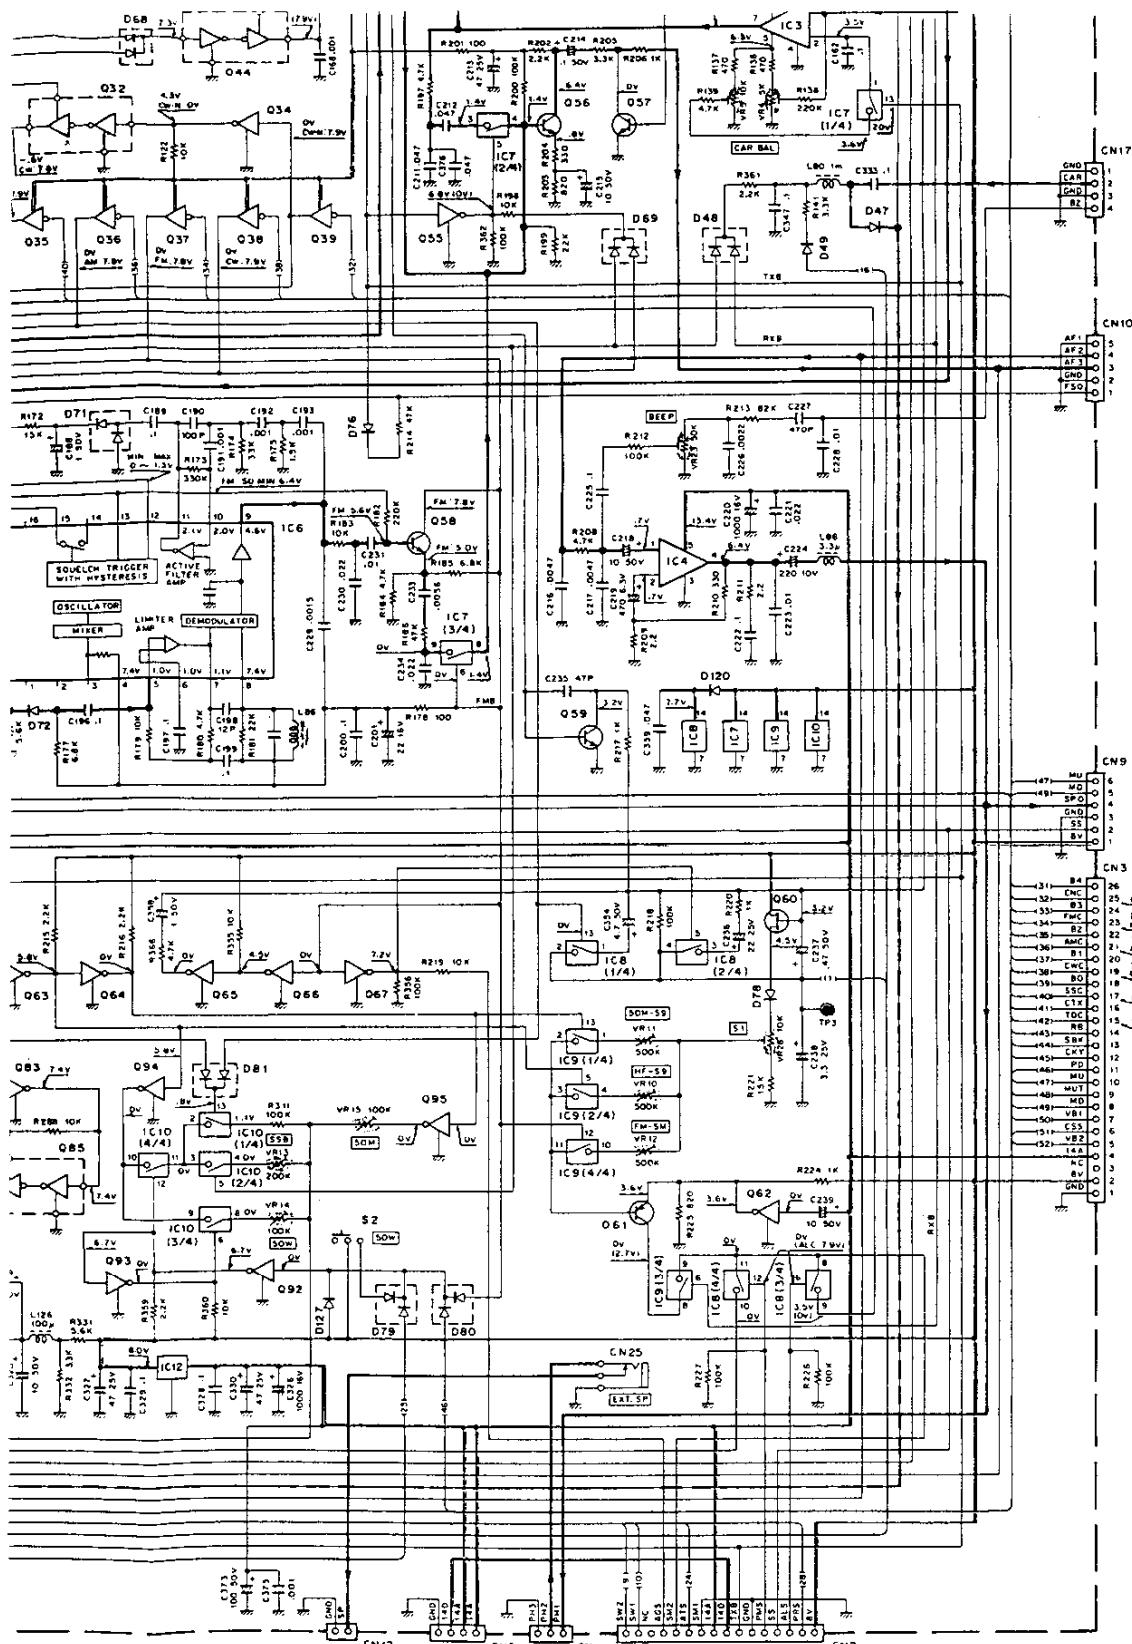

(X57-3190-00)
 Q1, 2, 26, 61, 69, 87, 90 : 2SA1162(Y)
 Q3, 4, 17, 34, 35, 63, 65~67, 73, 77,
 83, 84, 91, 92, 96, 97, 99 : 2SC114EK
 Q5~8, 35~39, 76 : 2SK1145K
 Q9~11, 13 : 2SC2668(Y)
 Q12 : 2SK192A(GR)+J
 Q14, 71, 73 : 2SC190T
 Q15, 81 : 2SC2053
 Q16 : DTA114EK
 Q18, 19, 22, 23, 70, 72 : 2SK125-5
 Q20, 32, 43, 44, 82, 85, 88 : FMC3
 Q21, 79, 80 : 3SK122(L)
 Q27, 30, 31, 78, 86 : 3SK73(GR)
 Q29, 40~42, 45~54, 56~59,
 74, 89, 98 : 2SC2712(Y)
 Q60, 68 : 2SK192A(Y)
 Q62, 64, 93~95 : DTC114TK

IC1 : M54581P
 IC2 : M74LS145P
 IC3 : AN612
 IC4 : APC2002V
 IC5 : SN16913P
 IC6 : MC3557P
 IC7~10 : TC4066BP
 IC11 : LM324N
 IC12 : AN7808

D1~3, 12 : DAN235K
 D5, 10 : US1090
 Q6, 9 : VOB (6)
 Q7, B, 11, 13~22, 38, 41, 44~46,
 50~53, 99~106, 109, 110, 116,
 122, 124, 126 : RLS133
 D23, 25, 90 : 151555
 D24, 48, 57, 61, 68, 69, 77,
 79~81, 85, 89, 97, 107, 119 : DAN202K
 D26, 28, 29, 31 : DAP202K
 D27, 33, 49, 54~56, 58~60,
 62~67, 70, 72~74, 76, 78, 83,
 86, 92, 95, 108, 112~15,
 117, 120, 123, 128, 129 : RL573
 D30, 93 : UZ-3.0B
 D34~37, 39, 40, 42, 43 : ITT310TE
 D47, 96 : M1204
 D71, 82, 86, 87 : HSM88AS
 D91 : MT291JB
 D111 : KB-369
 D116, 125 : RLZ3.6B
 D127 : IN60APSPA
 D127 : 155133
 TH1~4 : 112-502-2

(X59-1060-00)
 Q1 : 2SC2712(Y)

D1, 3 : DAN202K
 D2 : DAP202K

(X59-3000-02)
 Q1 : 2SC2712(Y)

IC1 : NJM4558M

(X59-3340-00)
 Q1, 2 : 2SA1204(Y)

Q3 : 2SA1162(Y)

Q4, 5 : DTC114EK

D1, 2 : DAN202(K)

(X59-3350-00)
 Q1, 2 : DTC114EK

IC1 : TC4011BF

(X59-3360-00)
 Q1~5 : DTC114EK


Q6 : DTA114EK

Q7 : DTC114TK


D1 : DAN202(K)

IC1 : MB74LS122



3SK122(L)




3SK73(GR)



2SC2668(Y)

2SK192A(Y)
2SK192A(GR)+J

NJM4558M



2SA1204(Y)



TERMINAL FUNCTION

Connector No.	Terminal No.	Terminal Name	Terminal Function
SWITCH UNIT (X41-3030-XX)			
CN1 (TS-140S)	1	GND	GND
	2	PPD	Packet power down
	3	RXB	RX power supply (+8V)
	4	PRS	Processor switch
	5	NC	Not connected
	6	MV3	Mic amp. output
CN2	1	SS	Standby switch
	2	8V	+8V
CN3	1	SS	Standby switch
	2	PKS	Packet standby
	3	GND	GND
	4	PDK	Packet data input
CN4 (TS-680S)	1	GND	GND
	2	VOX	VOX
CN5	1	MIC	Mic amp. input
	2	GND	GND
	3	BM	+8V (Mic)
	4	SS	Standby switch
CN6	1	AF1	AF GAIN GND
	2	AF2	AF GAIN volume
	3	AF3	AF GAIN input
	4	GND	GND
	5	FSQ	Squelch volume
	6	NC	Not connected
CN7	1	GND	GND
	2	RIT	RIT data
	3	RIB	RIT volume
	4	IFS	IF shift data
	5	IFB	IF shift volume
CN8	1	PH2	Phone output
	2	PH1	Phone input
	3	PH3	Phone GND
100W FINAL UNIT (X45-3100-XX)			
CN1	1	TXB	TX power supply (+8V)
	2	50B (NC)	50MHz power supply (TS-680S)
	3	PT	Not connected (TS-140S) Temperature protection signal
CN2	1	GND	GND
	2	14D	+14V (DC-DC converter)
	3	14A	+14V
	4	14A	+14V
CN3	1	5A	+5V (PLL)
	2	5B	+5V (Microprocessor)
	3	GND	GND
CN4 (TS-680S)	1	50T	50MHz TX power supply (+8V)
	2	14S	+14V
	3	14S	+14V
CN5	1	MOT +	Fan motor power supply +
	2	MOT -	Fan motor power supply -
		DRV	Drive input
		GND	GND
		PO	Power output
		GND	GND
(TS-680S)		50D	50MHz drive output
		GND	GND
		14S	+14V
		14	+14V
		GND	GND

Connector No.	Terminal No.	Terminal Name	Terminal Function
FILTER UNIT (X51-3040-XX)			
CN1 (TS-680S)	1	RL	Relay power supply (TX 1)
	2	RAT	RX antenna output
	3	GND	GND
CN2 (TS-680S)	1	50T	50MHz TX power supply
	2	14S	+14V
	3	14S	+14V
CN3	1	50F (NC)	50 ~ 54MHz (TS-680S)
	2	14F	Not connected (TS-140S)
	3	28F	7.5 ~ 14.5MHz
	4	7F	21.5 ~ 30MHz
	5	21F	4 ~ 7.5MHz
	6	4F	14.5 ~ 21.5MHz
	7	2F	2.5 ~ 4MHz
CN4	1	VSF	Forward wave voltage
	2	GND	GND
	3	VSR	Reflected wave voltage
	4	GND	GND
CN5		PO	Power input
		GND	GND
CN6 (TS-680S)		50D	50MHz drive input
		GND	GND
		ANT	Antenna
		GND	GND
CONTROL UNIT (X53-3100-XX)			
CN1	1	CAR	Carrier output (455kHz)
	2	GND	GND
CN2	1	5A	+5V (PLL)
	2	5B	+5V (Microprocessor)
	3	GND	GND
CN3		VCO	VCO input
		GND	GND
CN4	1	GND	GND
	2	VCV	VCO control voltage
	3	8D	+8V (Active low-pass filter)
CN5	1	FMM	FM modulation signal input
	2	GND	GND
CN6		HET	Heterodyne output
		GND	GND
CN7	1	BZ	Beep sound output
	2	NC	Not connected
CN8	1	5B	+5V (Interface)
	2	RDY	Ready
	3	CD	Control data
	4	CS	Chip select
	5	RD	Read enable
	6	WR	Write enable
	7	GND	GND
CN9	1	RES	Reset
	2	D0	
	3	D1	
	4	D2	
	5	D3	
	6	D4	
	7	D5	
	8	D6	
	9	D7	
IF-1C (Opti)			
IF-1C (Opti)			

TERMINAL FUNCTION

Terminal Function				
3030-XX)				
Power down Ir supply (+8V)	1	RL	Relay power supply (TX 13V)	
Ir switch selected output	2	RAT	RX antenna output	
	3	GND	GND	
switch	CN1	1	50T	50MHz TX power supply
		2	14S	+14V
		3	14S	+14V
switch andby	CN2	1	50F (NC)	50 ~ 54MHz (TS-680S) Not connected (TS-140S)
		2	14F	7.5 ~ 14.5MHz
		3	28F	21.5 ~ 30MHz
		4	7F	4 ~ 7.5MHz
		5	21F	14.5 ~ 21.5MHz
		6	4F	2.5 ~ 4MHz
		7	2F	~ 2.5MHz
ata input	CN3	1	VSF	Forward wave voltage
		2	GND	GND
		3	VSR	Reflected wave voltage
		4	GND	GND
input	CN4	1	PO	Power input
		2	GND	GND
:)	CN5	1	50D	50MHz drive input
		2	GND	GND
switch	CN6	1	ANT	Antenna
		2	GND	GND
↓ GND				
↓ volume				
↓ input				
volume ected				
me data volume				
input put ND				
5-3100-XX)				
Ir supply (+8V)	CN1	1	CAR	Carrier output (455kHz)
Power supply (TS-680S)		2	GND	GND
ected (TS-140S)	CN2	1	5A	+5V (PLL)
ture protection signal		2	5B	+5V (Microprocessor)
		3	GND	GND
C-DC converter)	CN3	1	VCO	VCO input
		2	GND	GND
L) microprocessor)	CN4	1	GND	GND
		2	VCV	VCO control voltage
		3	8D	+8V (Active low-pass filter)
-X power supply (+8V)	CN5	1	FMM	FM modulation signal input
		2	GND	GND
or power supply + or power supply -	CN6	1	HET	Heterodyne output
		2	GND	GND
out	CN7	1	BZ	Beep sound output
		2	NC	Not connected
input	CN8	1	5B	+5V (Interface)
		2	RDY	Ready
		3	CD	Control data
		4	CS	Chip select
		5	RD	Read enable
		6	WR	Write enable
		7	GND	GND
drive output	CN9	1	RES	Reset
		2	D0	
		3	D1	
		4	D2	
		5	D3	Microprocessor data bus 0 ~ 7
		6	D4	
		7	D5	
		8	D6	
		9	D7	

Connector No.	Terminal No.	Terminal Name	Terminal Function
FILTER UNIT (X51-3040-XX)			
CN1	1	RL	Relay power supply (TX 13V)
	2	RAT	RX antenna output
	3	GND	GND
CONTROL UNIT (X53-3100-XX)			
CN1	1	CAR	Carrier output (455kHz)
	2	GND	GND
CN2	1	5A	+5V (PLL)
	2	5B	+5V (Microprocessor)
	3	GND	GND
CN3	1	VCO	VCO input
	2	GND	GND
CN4	1	GND	GND
	2	VCV	VCO control voltage
	3	8D	+8V (Active low-pass filter)
CN5	1	FMM	FM modulation signal input
	2	GND	GND
CN6	1	HET	Heterodyne output
	2	GND	GND
CN7	1	BZ	Beep sound output
	2	NC	Not connected
CN8	1	5B	+5V (Interface)
	2	RDY	Ready
	3	CD	Control data
	4	CS	Chip select
	5	RD	Read enable
	6	WR	Write enable
	7	GND	GND
CN9	1	RES	Reset
	2	D0	
	3	D1	
	4	D2	
	5	D3	Microprocessor data bus 0 ~ 7
	6	D4	
	7	D5	
	8	D6	
	9	D7	

Connector No.	Terminal No.	Terminal Name	Terminal Function
CN10	1	B4	Band data
	2	CNC	CW narrow mode
	3	B3	Band data
	4	FMC	FM mode data
	5	B2	Band data
	6	AMC	AM mode data
	7	B1	Band data
	8	CWC	CW mode data
	9	B0	Band data
	10	SSC	SSB mode data
	11	CTX	Transmit timing
	12	TOC	Sub-tone control
	13	RB	Receive timing
	14	SBK	Blanking signal
	15	CKY	Keying control
	16	PD	Power down signal
	17	MU	Mic up data
	18	MUT	Mute signal
	19	MD	Mic down data
	20	VBI	VCO switching
	21	CSS	Standby control
	22	VBS	VCO switching
	23	14A	+14V
	24	NC	Not connected
	25	8V	+8V
	26	GND	GND
CN11	1	CK4	Sub-encoder pulse
	2	CK3	Sub-encoder pulse
	3	5C	+5V (Display)
	4	L1	LED (1MHz)
	5	K0	Key scan input
	6	LF	LED (F, LOCK)
	7	K1	Key scan input
	8	LM	LED (M, SCR)
	9	K2	Key scan input
	10	XP	Display function
	11	K3	Key scan input
	12	SLH	Display serial data
	13	S0	Key scan output
	14	SDA	Display serial data
	15	S1	Key scan output
	16	SCK	Display serial clock
	17	S2	Key scan output
	18	S3	Key scan output
CN12	1	GND	GND
	2	CK2	Main encoder pulse
	3	CK1	Main encoder pulse
	4	5B	+5V (Main encoder)
CN13	1	IFB	IF shift volume
	2	RIB	RIT volume
	3	RIT	RIT data
	4	IFS	IF shift data
	5	GND	GND
CN14	1	HFL	HF low
	2	HFH	HF high
	3	50M	50MHz
		CAL	Ar

30S TS-140S/680S

TS-140S/680S

TERMINAL FUNCTION

Connector No.	Terminal No.	Terminal Name	Terminal Function
CN10	1	B4	Band data
	2	CNC	CW narrow mode data
	3	B3	Band data
	4	FMC	FM mode data
	5	B2	Band data
	6	AMC	AM mode data
	7	B1	Band data
	8	CWC	CW mode data
	9	BO	Band data
	10	SSC	SSB mode data
	11	CTX	Transmit timing control signal
	12	TOC	Sub-tone control signal
	13	RB	Receive timing control signal
	14	SBK	Blanking signal
	15	CKY	Keying control signal
	16	PD	Power down signal
	17	MU	Mic up data
	18	MUT	Mute signal
	19	MD	Mic down data
	20	VB1	VCO switching signal
	21	CSS	Standby control data
	22	VB2	VCO switching signal
	23	14A	+14V
	24	NC	Not connected
	25	8V	+8V
	26	GND	GND
CN11	1	CK4	Sub-encoder pulse input
	2	CK3	Sub-encoder pulse input
	3	5C	+5V (Display)
	4	L1	LED (1MHz)
	5	K0	Key scan input
	6	LF	LED (F. LOCK)
	7	K1	Key scan input
	8	LM	LED (M.SCR)
	9	K2	Key scan input
	10	XP	Display function signal
	11	K3	Key scan input
	12	SLH	Display serial data (Latch signal)
	13	S0	Key scan output
	14	SDA	Display serial data
	15	S1	Key scan output
	16	SCK	Display serial clock
	17	S2	Key scan output
	18	S3	Key scan output
CN12	1	GND	GND
	2	CK2	Main encoder pulse input
	3	CK1	Main encoder pulse input
	4	5B	+5V (Main encoder)
CN13	1	IFB	If shift volume
	2	RIB	RIT volume
	3	RIT	RIT data
	4	IFS	IF shift data
	5	GND	GND
CN14	1	HFL	HF low
	2	HFH	HF high
	3	50M	50MHz
		CAL	Antenna select signal

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

Connector No.	Terminal No.	Terminal Name	Terminal Function
DISPLAY UNIT (X54-3050-XX)			
CN1	1	SM1	S meter –
	2	SM2	S meter +
CN2	1	BV	+8V
	2	PRS	Processor switch
	3	ALS	ALC meter switch
	4	SS	Standby switch
	5	PMS	Power meter switch
	6	GND	GND
	7	TXB	TX power supply (+8V)
	8	14D	+14V (DC-DC converter)
	9	14A	+14V
	10	SM1	S meter –
	11	ATS	RF ATT switch
	12	SM2	S meter +
	13	AGS	AGC switch
	14	NC	Not connected
	15	SW1	RF amplifier signal (TS-680S)
	16	SW2	VOX signal (TS-140S)
CN3	1	COM	Break in input
	2	SEM	Semi-break in signal
	3	FUL	Full break in signal
	4	KEY	Key signal
	5	NB1	Noise blower 1 switch
	6	SS	Standby signal
	7	NBC	NB time constant
	8	CV	Carrier volume
	9	NB2	Noise blower 2 switch
	10	PC1	Power control volume
	11	RFB	RF GAIN input
	12	PC2	Power control volume
	13	RFG	RF GAIN volume output
	14	MV1	Mic volume GND
	15	MV2	Mic volume output
	16	MV3	Mic volume input
CN4	1	S3	Key scan input
	2	S2	Key scan input
	3	SCK	Display serial clock
	4	S1	Key scan input
	5	SDA	Display serial data
	6	S0	Key scan input
	7	SLH	Display serial data (Latch signal)
	8	K3	Key scan output
	9	XP	Display function signal
	10	K2	Key scan output
	11	LM	LED (M.SCR)
	12	K1	Key scan output
	13	LF	LED (F. LOCK)
	14	K0	Key scan output
	15	L1	LED (1MHz)
	16	5C	+5V (Display)
	17	CK3	Sub-encoder pulse output
	18	CK4	Sub-encoder pulse output
CN5	1	SPO	Speaker output
	2	8M	+8V
	3	GND	GND
	4	MU	Mic up data
	5	MD	Mic down data
	6	SS	Standby switch
	7	MIC	Microphone
	8	GND	GND (Mic)

TS-140S/680S

TS-140S/680S

TERMINAL FUNCTION

Connector No.	Terminal No.	Terminal Name	Terminal Function
SIGNAL UNIT (X57-3190-00) : TS-680S			
SIGNAL UNIT (X57-3200-XX) : TS-140S			
CN1	1	MV3	Mic volume output
	2	MV2	Mic volume input
	3	MV1	Mic volume GND
	4	RFG	RF GAIN volume input
	5	PC2	Power control volume
	6	RFB	RF GAIN output
	7	PC1	Power control volume
	8	NB2	Noise blanker 2 switch
	9	CV	Carrier volume
	10	NBC	NB time constant
	11	SS	Standby switch
	12	NB1	Noise blanker 1 switch
	13	KEY	Key signal
	14	FUL	Full break in signal
	15	SEM	Semi-break in signal
	16	COM	Full break in output
CN2	1	SW2	RF amplifier signal (TS-680S)
	2	SW1	VDX signal (TS-140S)
	3	NC	Not connected
	4	AGS	AGC switch
	5	SM2	S meter +
	6	ATS	RF ATT switch
	7	SM1	S meter –
	8	14A	+14V
	9	14D	+14V (DC-DC converter)
	10	TXB	TX power supply (+8V)
	11	GND	GND
	12	PMS	Power meter switch
	13	SS	Standby switch
	14	ALS	ALC meter switch
	15	PRS	Processor switch
	16	8V	+8V
CN3	1	GND	GND
	2	8V	+8V
	3	NC	Not connected
	4	14A	+14V
	5	VB2	VCO switching signal
	6	CSS	Standby control data
	7	VB1	VCO switching signal
	8	MD	Mic down data
	9	MUT	Mute signal
	10	MU	Mic up data
	11	PD	Power down signal
	12	CKY	Keying control signal
	13	SBK	Blanking signal
	14	RB	Receive timing control signal
	15	TOC	Sub-tone control signal
	16	CTX	Transmit timing control signal
	17	SSC	SSB mode data
	18	B0	Band data
	19	CWC	CW mode data
	20	B1	Band data
	21	AMC	AM mode data
	22	B2	Band data
	23	FMC	FM mode data
	24	B3	Band data
	25	CNC	CW narrow mode data
	26	B4	Band data
CN4	1	RAT	RX antenna input
	2	GND	GND
	3	RL	Relay power supply (TX 13V)

Connector No.	Terminal No.	Terminal Name	Terminal Function
CN5	1	50F (NC)	50 ~ 54MHz (TS-680S) Not connected (TS-140S)
	2	28F	21.5 ~ 30MHz
	3	21F	14.5 ~ 21.5MHz
	4	14F	7.5 ~ 14.5MHz
	5	7F	4 ~ 7.5MHz
	6	4F	2.5 ~ 4MHz
	7	2F	~ 2.5MHz
CN6	1	8D	+8V (Active low-pass filter)
	2	VCV	VCO control voltage
	3	GND	GND
CN7 (TS-680S)	1	NC	Not connected
	2	50B	50MHz power supply
CN8	1	GND	GND
	2	14D	+14V (DC-DC converter)
	3	14A	+14V (DC-DC converter)
	4	14A	+14V (DC-DC converter)
CN9	1	8V	+8V
	2	SS	Standby switch
	3	GND	GND
	4	SPO	Speaker output
	5	MD	Mic down data
	6	MU	Mic up data
CN10	1	FSQ	Squelch volume
	2	GND	GND
	3	AF3	AF GAIN output
	4	AF2	AF GAIN volume
	5	AF1	AF GAIN GND
CN11	1	PH3	Phone GND
	2	PH2	Phone input
	3	PH1	Phone output
CN12	1	SP	Speaker output
	2	GND	GND
CN13	1	GND	GND
	2	VSR	Reflected wave voltage
	3	GND	GND
	4	VSF	Forward wave voltage
CN14	1	TXB	TX power supply (+8V)
	2	PT	Temperature protection signal
CN15	1	PPD	Packet power down
	2	ANO	RX audio output
	3	GND	GND
	4	PSQ	Packet squelch
	5	GND	GND
	6	MV3	Mic amp. output
	7	GND	GND
	8	PRS	Processor switch
	9	RXB	RX power supply (+8V)
	10	GND	GND
CN16	1	FMM	FM modulation signal
	2	GND	GND
CN17	1	GND	GND
	2	CAR	Carrier input (455kHz)
	3	GND	GND
	4	BZ	Beep sound input
CN18	1	CF1	Option filter output
	2	GND	GND
CN19	1	CF2	Option filter input
	2	GND	GND
CN20		DRV	Drive output
		GND	GND

TERMINAL FUNCTION

Terminal Function			
I) : TS-680S			
X) : TS-140S			
The output			
The input			
The GND			
Volume input			
Control volume			
Output			
Control volume			
Speaker 2 switch			
Volume			
Constant			
Switch			
Speaker 1 switch			
In signal			
Mic signal			
In output			
Identifier signal (TS-680S)			
Identifier (TS-140S)			
Control			
Antenna			
Switch			
DC converter supply (+8V)			
Power switch			
Mic switch			
Speaker switch			
Controlled			
Ring signal control data			
Ring signal data			
I			
A			
In signal			
Control signal			
Signal			
Ring control signal			
Control signal			
Ring control signal			
Data			
ATA			
ATA			
ATA			
Mode data			
Input			
Power supply (TX 13V)			

Connector No.	Terminal No.	Terminal Name	Terminal Function
CN5	1	50F (NC)	50 ~ 54MHz (TS-680S) Not connected (TS-140S)
	2	28F	21.5 ~ 30MHz
	3	21F	14.5 ~ 21.5MHz
	4	14F	7.5 ~ 14.5MHz
	5	7F	4 ~ 7.5MHz
	6	4F	2.5 ~ 4MHz
	7	2F	~ 2.5MHz
CN6	1	8D	+8V (Active low-pass filter)
	2	VCV	VCO control voltage
	3	GND	GND
CN7 (TS-680S)	1	NC	Not connected
	2	50B	50MHz power supply
CN8	1	GND	GND
	2	14D	+14V (DC-DC converter)
	3	14A	+14V (DC-DC converter)
	4	14A	+14V (DC-DC converter)
CN9	1	8V	+8V
	2	SS	Standby switch
	3	GND	GND
	4	SPO	Speaker output
	5	MD	Mic down data
	6	MU	Mic up data
CN10	1	FSQ	Squelch volume
	2	GND	GND
	3	AF3	AF GAIN output
	4	AF2	AF GAIN volume
	5	AF1	AF GAIN GND
CN11	1	PH3	Phone GND
	2	PH2	Phone input
	3	PH1	Phone output
CN12	1	SP	Speaker output
	2	GND	GND
CN13	1	GND	GND
	2	VSR	Reflected wave voltage
	3	GND	GND
	4	VSF	Forward wave voltage
CN14	1	TXB	TX power supply (+8V)
	2	PT	Temperature protection signal
CN15	1	PPD	Packet power down
	2	ANO	RX audio output
	3	GND	GND
	4	PSQ	Packet squelch
	5	GND	GND
	6	MV3	Mic amp. output
	7	GND	GND
	8	PRS	Processor switch
	9	RXB	RX power supply (+8V)
	10	GND	GND
CN16	1	FMM	FM modulation signal
	2	GND	GND
CN17	1	GND	GND
	2	CAR	Carrier input (455kHz)
	3	GND	GND
	4	BZ	Beep sound input
CN18	1	CF1	Option filter output
	2	GND	GND
CN19	1	CF2	Option filter input
	2	GNO	GND
CN20		DRV	Drive output
		GND	GND

Connector No.	Terminal No.	Terminal Name	Terminal
CN21		HET	Heterodyne input
		GND	GND
CN22		VCO	VCO output
		GND	GND
CN501 (TS-140S)	1	GND	GND
	2	VOX	VOX
CN27	1	GND	GND
	2	PKD	Packet data
	3	SS	Standby switch
	4	PKS	Packet standby
	5	PSQ	Packet squelch
	6	ANO	RX audio output
	7	GND	GND
	8	GND	GND
CN28	1	NC	Not connected
	2	NC	Not connected
	3	ANO	RX audio output
	4	GND	GND
	5	PSQ	Packet squelch
	6	NC	Not connected
	7	NC	Not connected
	8	GND	GND
	9	PKS	Packet standby
	10	NC	Not connected
	11	PKD	Packet power down
	12	GND	GND
	13	SS	Standby switch
CN29	1	TQN	Sub-tone input
	2	TOG	Sub-tone GND
		TOB	Sub-tone power su
		CAL	


OS TS-140S/680S**TERMINAL FUNCTION**

Connector No.	Terminal No.	Terminal Name	Terminal Function
CN21		HET GND	Heterodyne input (39.6MHz) GND
CN22		VCO GND	VCO output GND
CN501 (TS-140S)	1 2	GND VOX	GND VOX
CN27	1 2 3 4 5 6 7 8	GND PKD SS PKS PSQ ANO GND GND	GND Packet data Standby switch Packet standby Packet squelch RX audio output GND GND
CN28	1 2 3 4 5 6 7 8 9 10 11 12 13	NC NC ANO GND PSQ NC NC GND PKS NC PKD GND SS	Not connected Not connected RX audio output GND Packet squelch Not connected Not connected GND Packet standby Not connected Packet power down GND Standby switch
CN29	1 2	TON TOG	Sub-tone input Sub-tone GND
		TOB	Sub-tone power supply (+8V)
		CAL	

TS-140S/680S PC BOARD VIEWS (TS-140S)


SIDE TONE (X59-1060-00)

Component side view

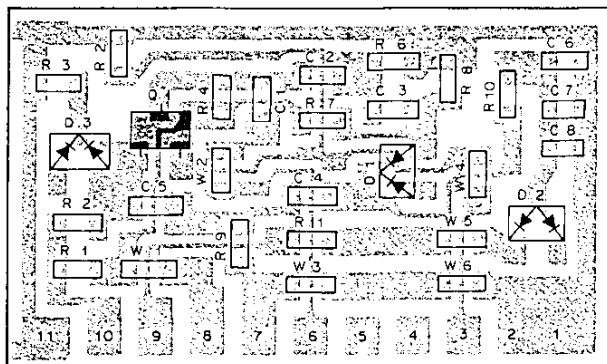


VOX (X59-1080-00)

Component side view

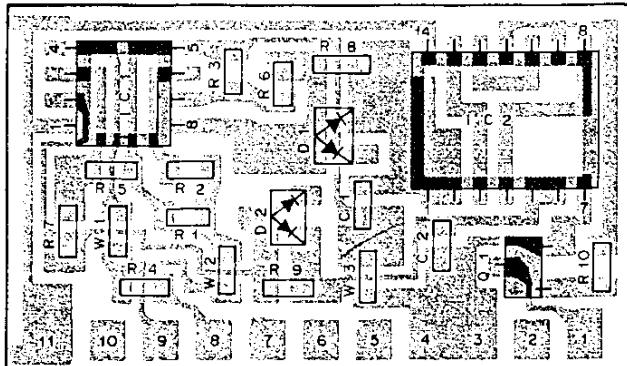


FM MIC AMP. (X59-3000-02)

Component side view

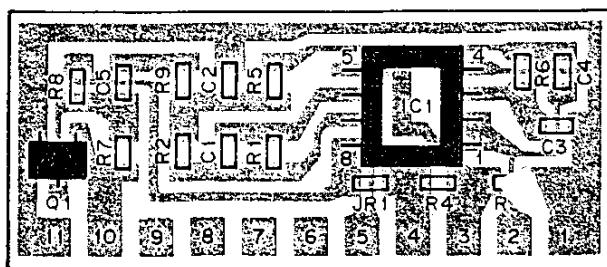


TRX (X59-3340-00)

Component side view

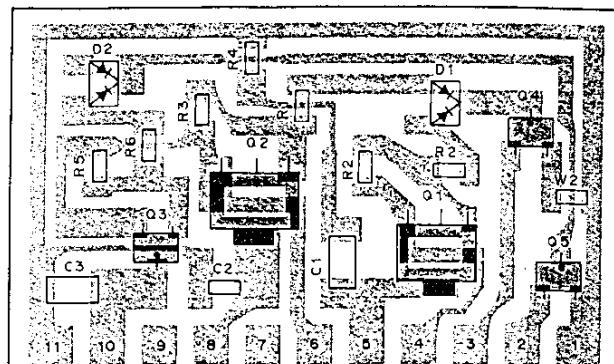


NB2 (X59-3350-00)

Component side view

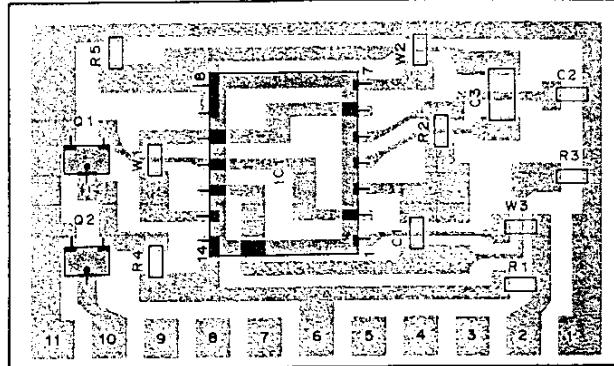

DELAY TIME (X59-3360-00)

Component side view

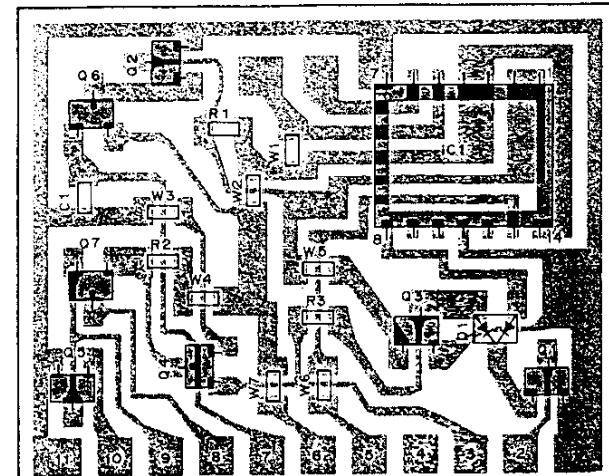

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694


FAX: 01844 - 352554

ARD VIEWS (TS-140S)

SIGNAL UNIT (X57-3200-XX) -10 : K, M, T -61 : V


TRX (X59-3340-00)

Component side view

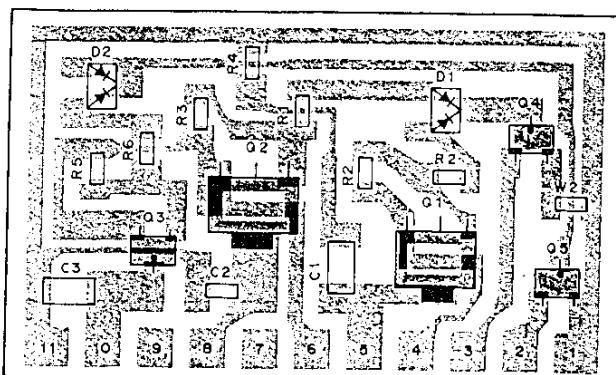



NB2 (X59-3350-00)

Component side view

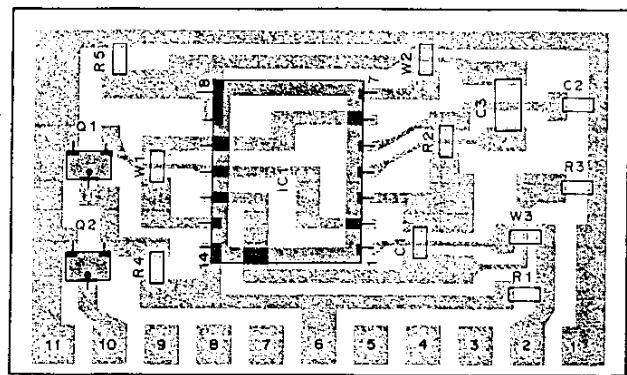



DELAY TIME (X59-3360-00)

Component side view

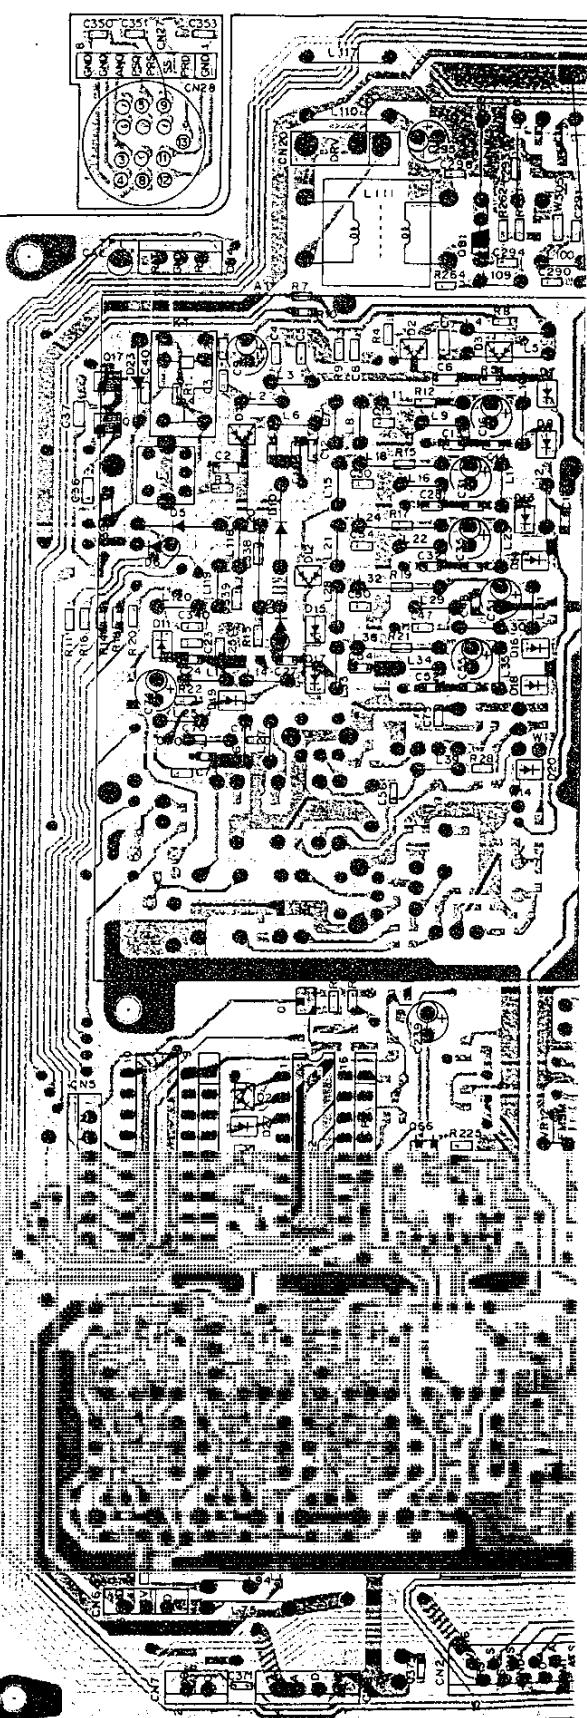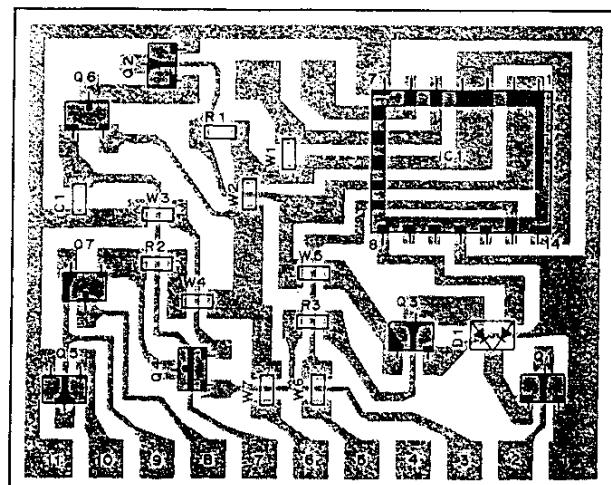

SIGNAL UNIT (X57-3200-XX) -10 : K, M, T -61 : W Component side view

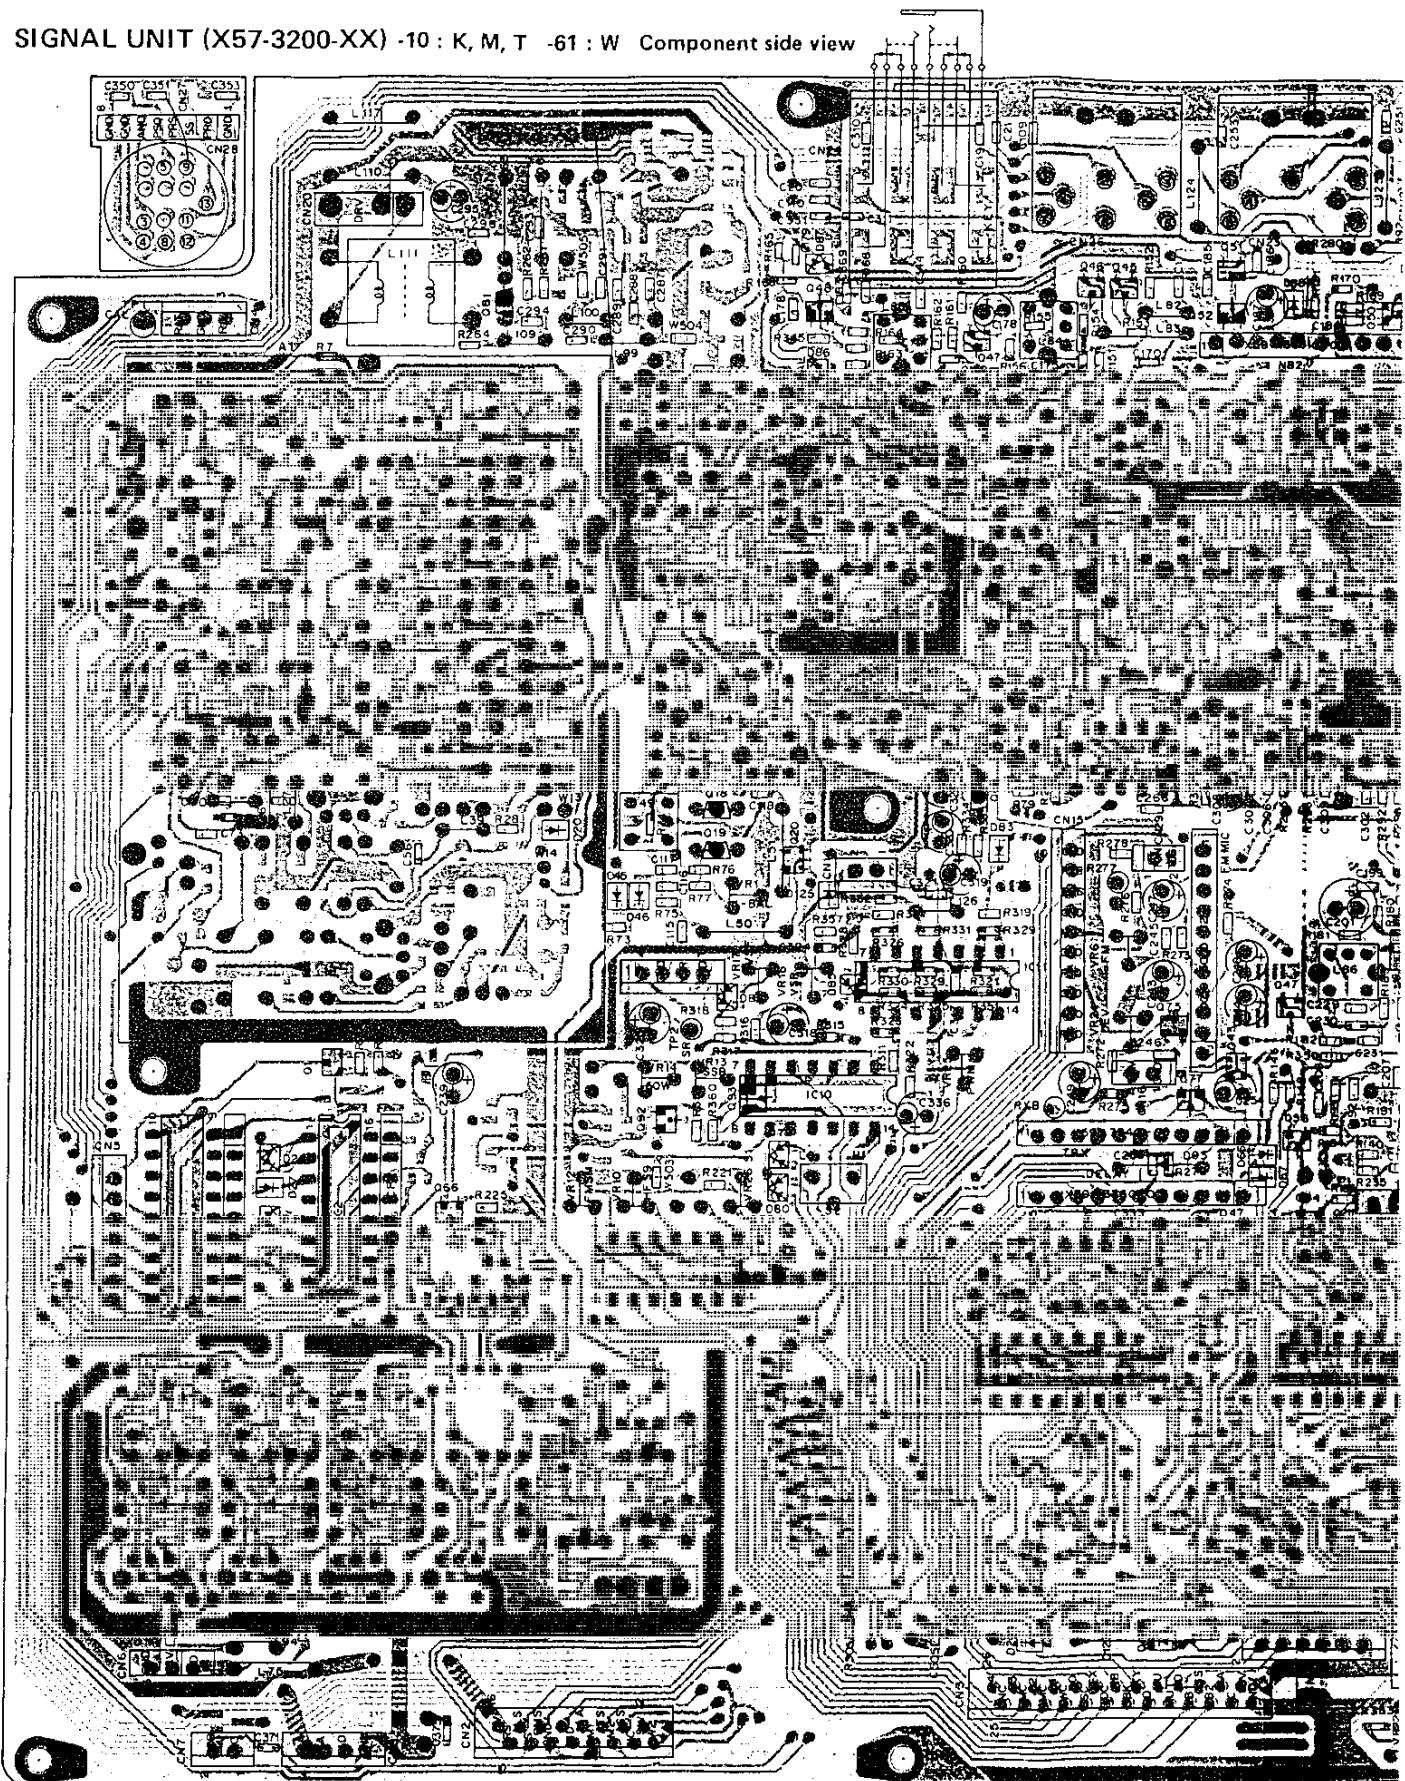

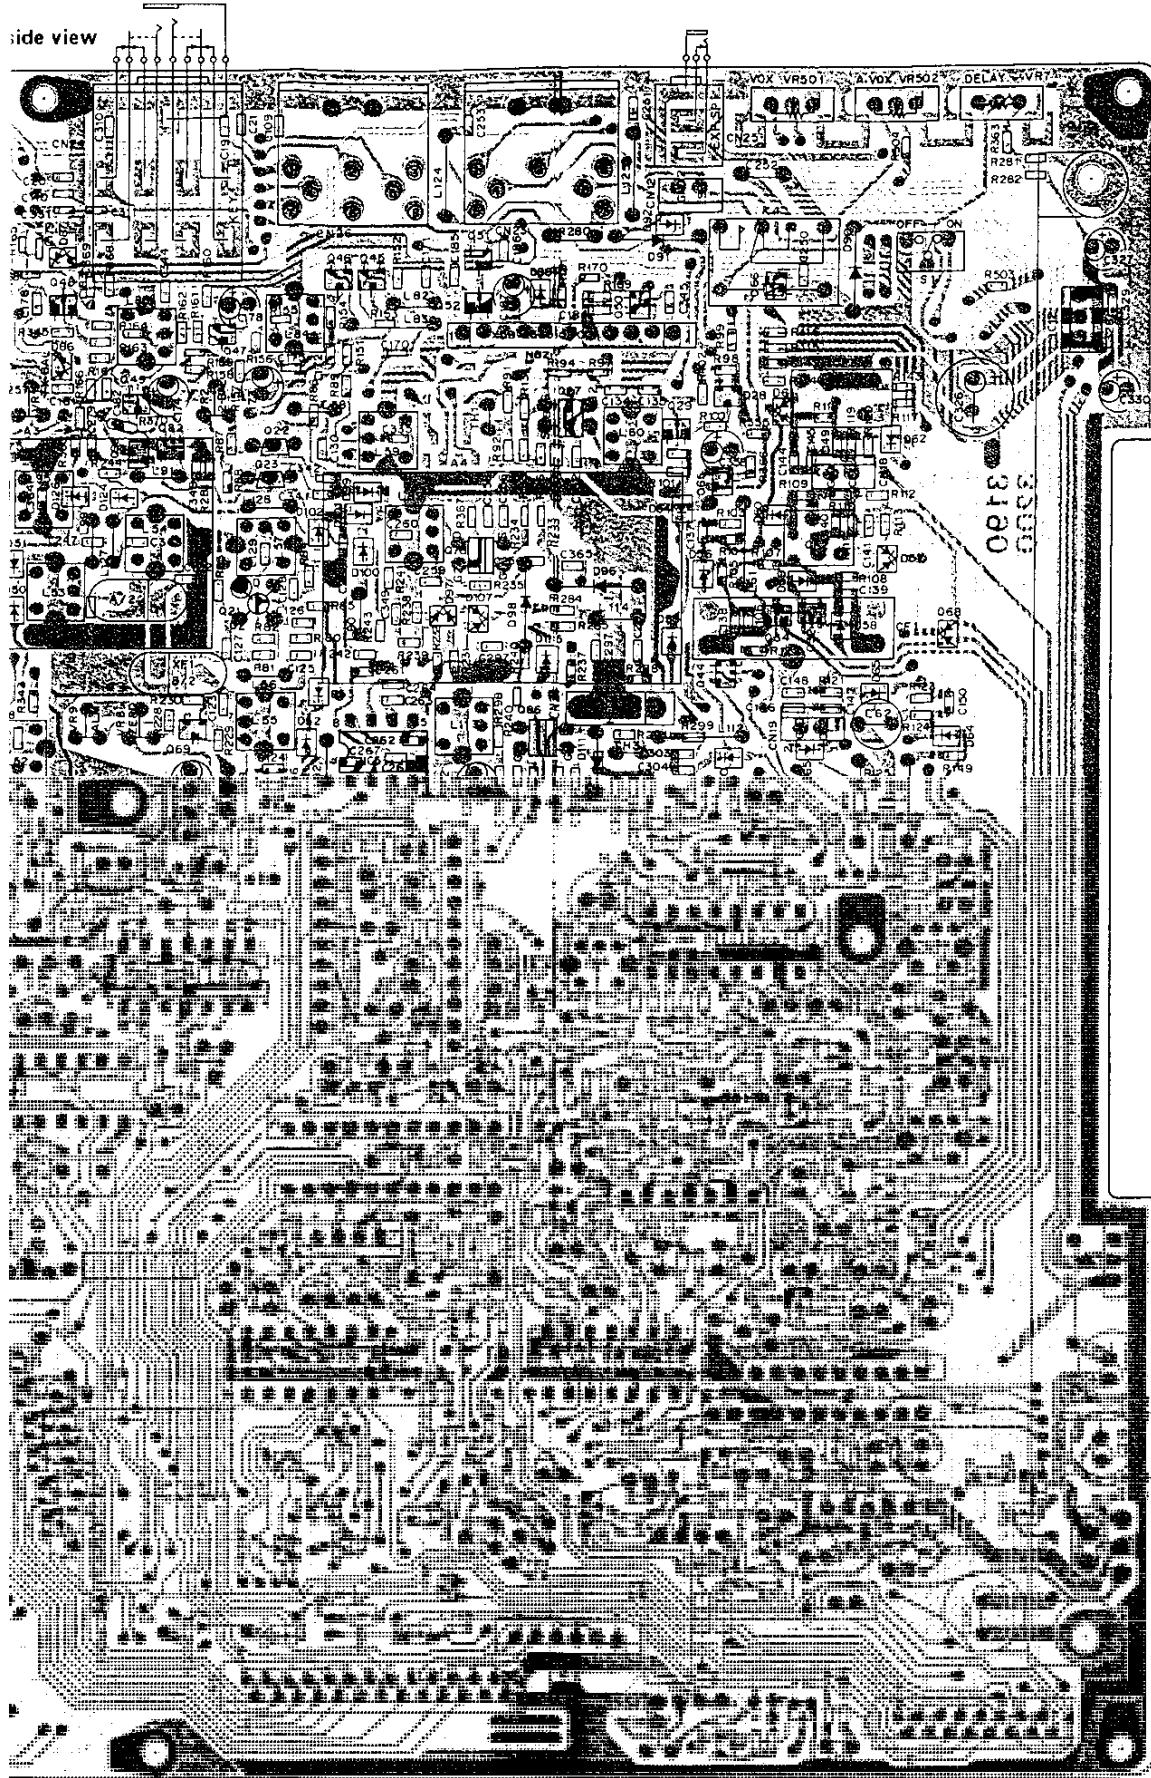

SIGN/

FOR SERVICE MANUALS
CONTACT:


MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk


TEL: 01844 - 351694

FAX: 01844 - 352554

SIGNAL UNIT (X57-3200-XX) -10 : K, M, T -61 : W Foil side view

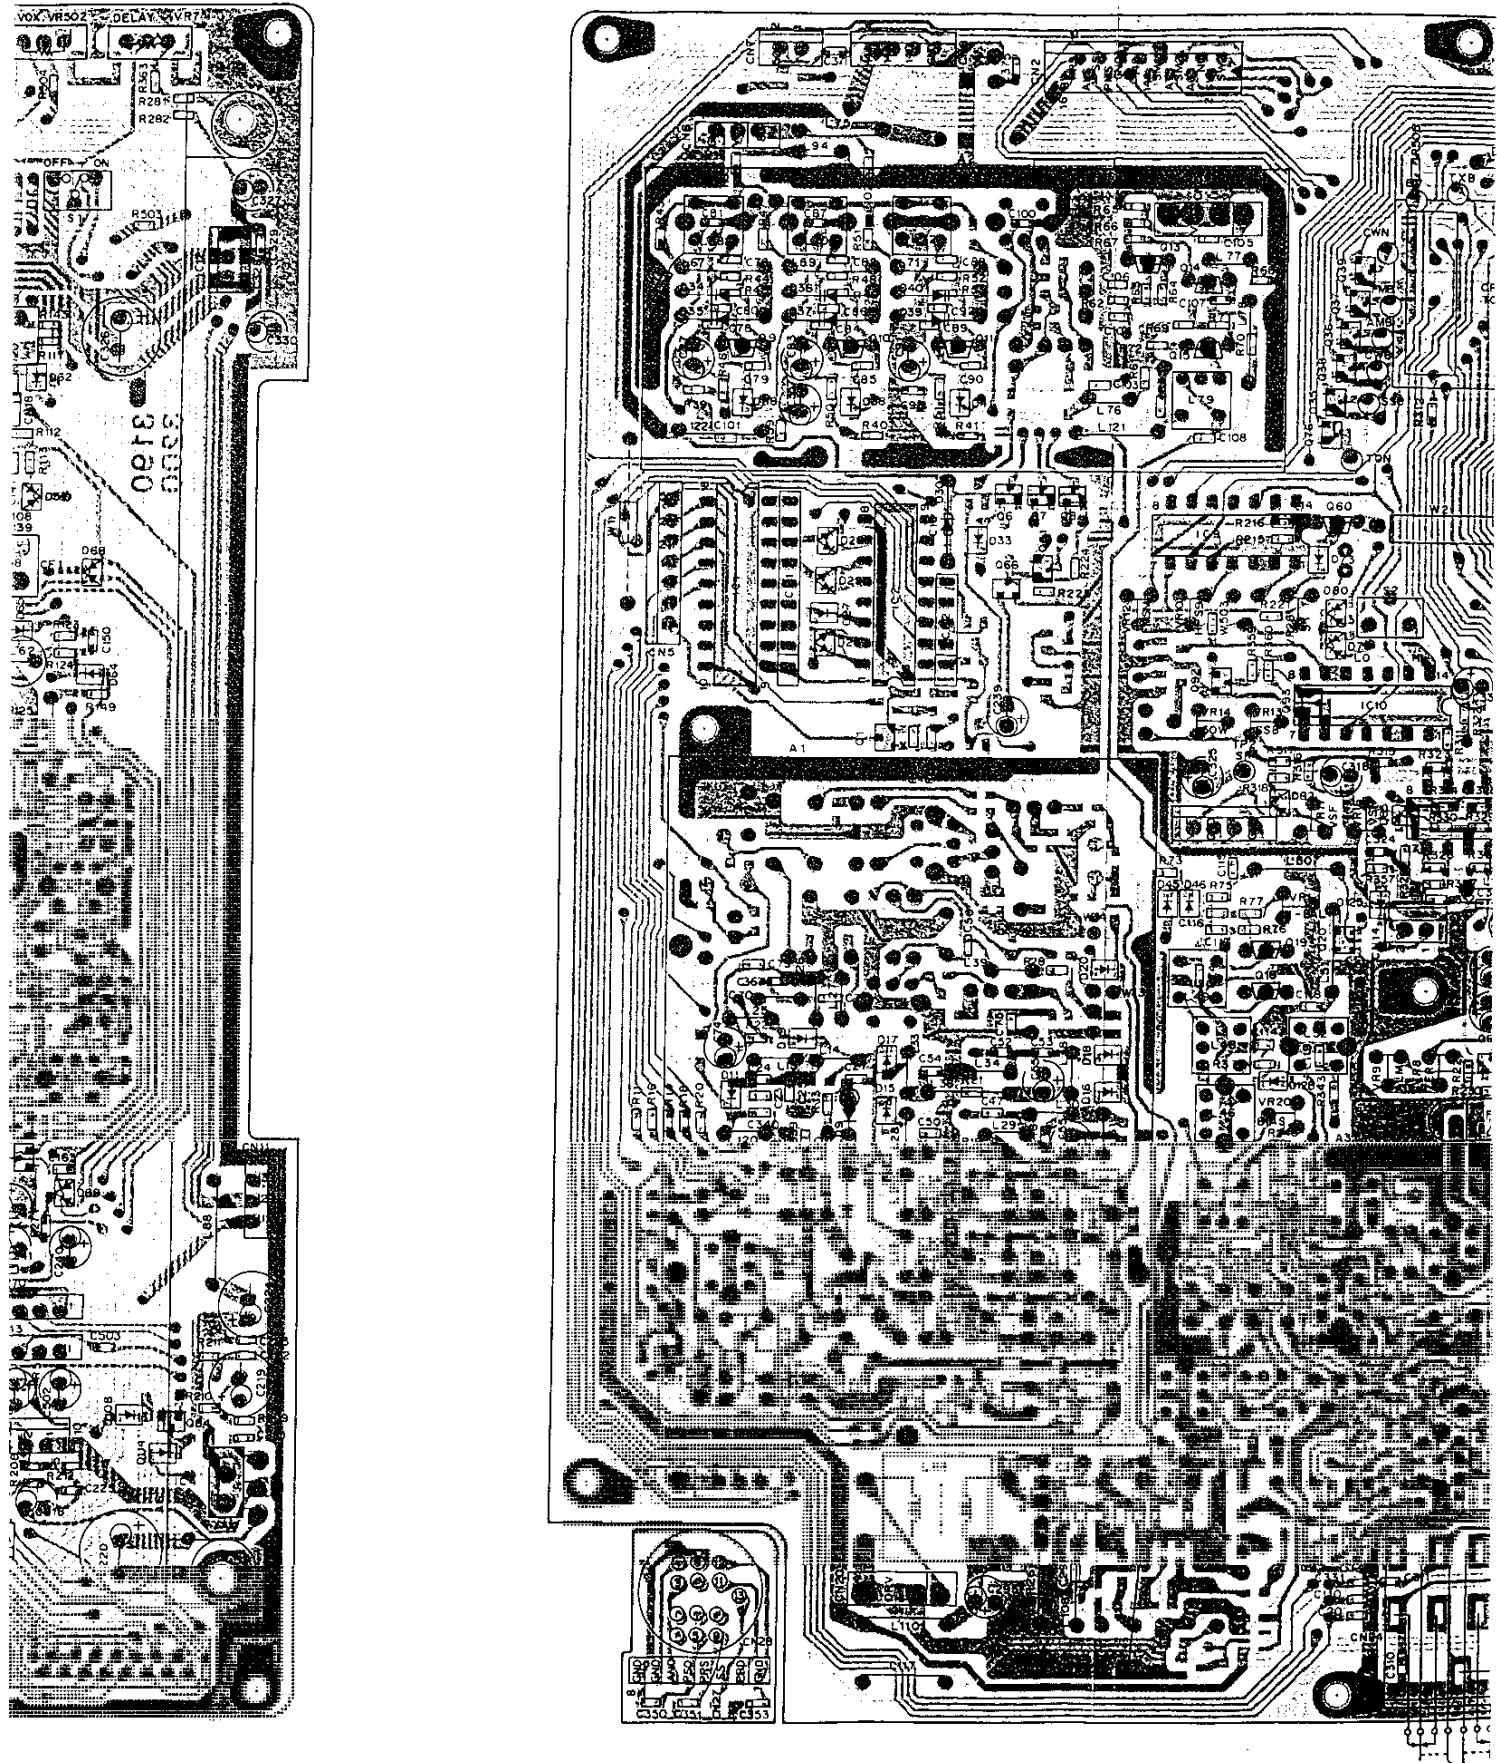



M, T -61 : W Foil side view

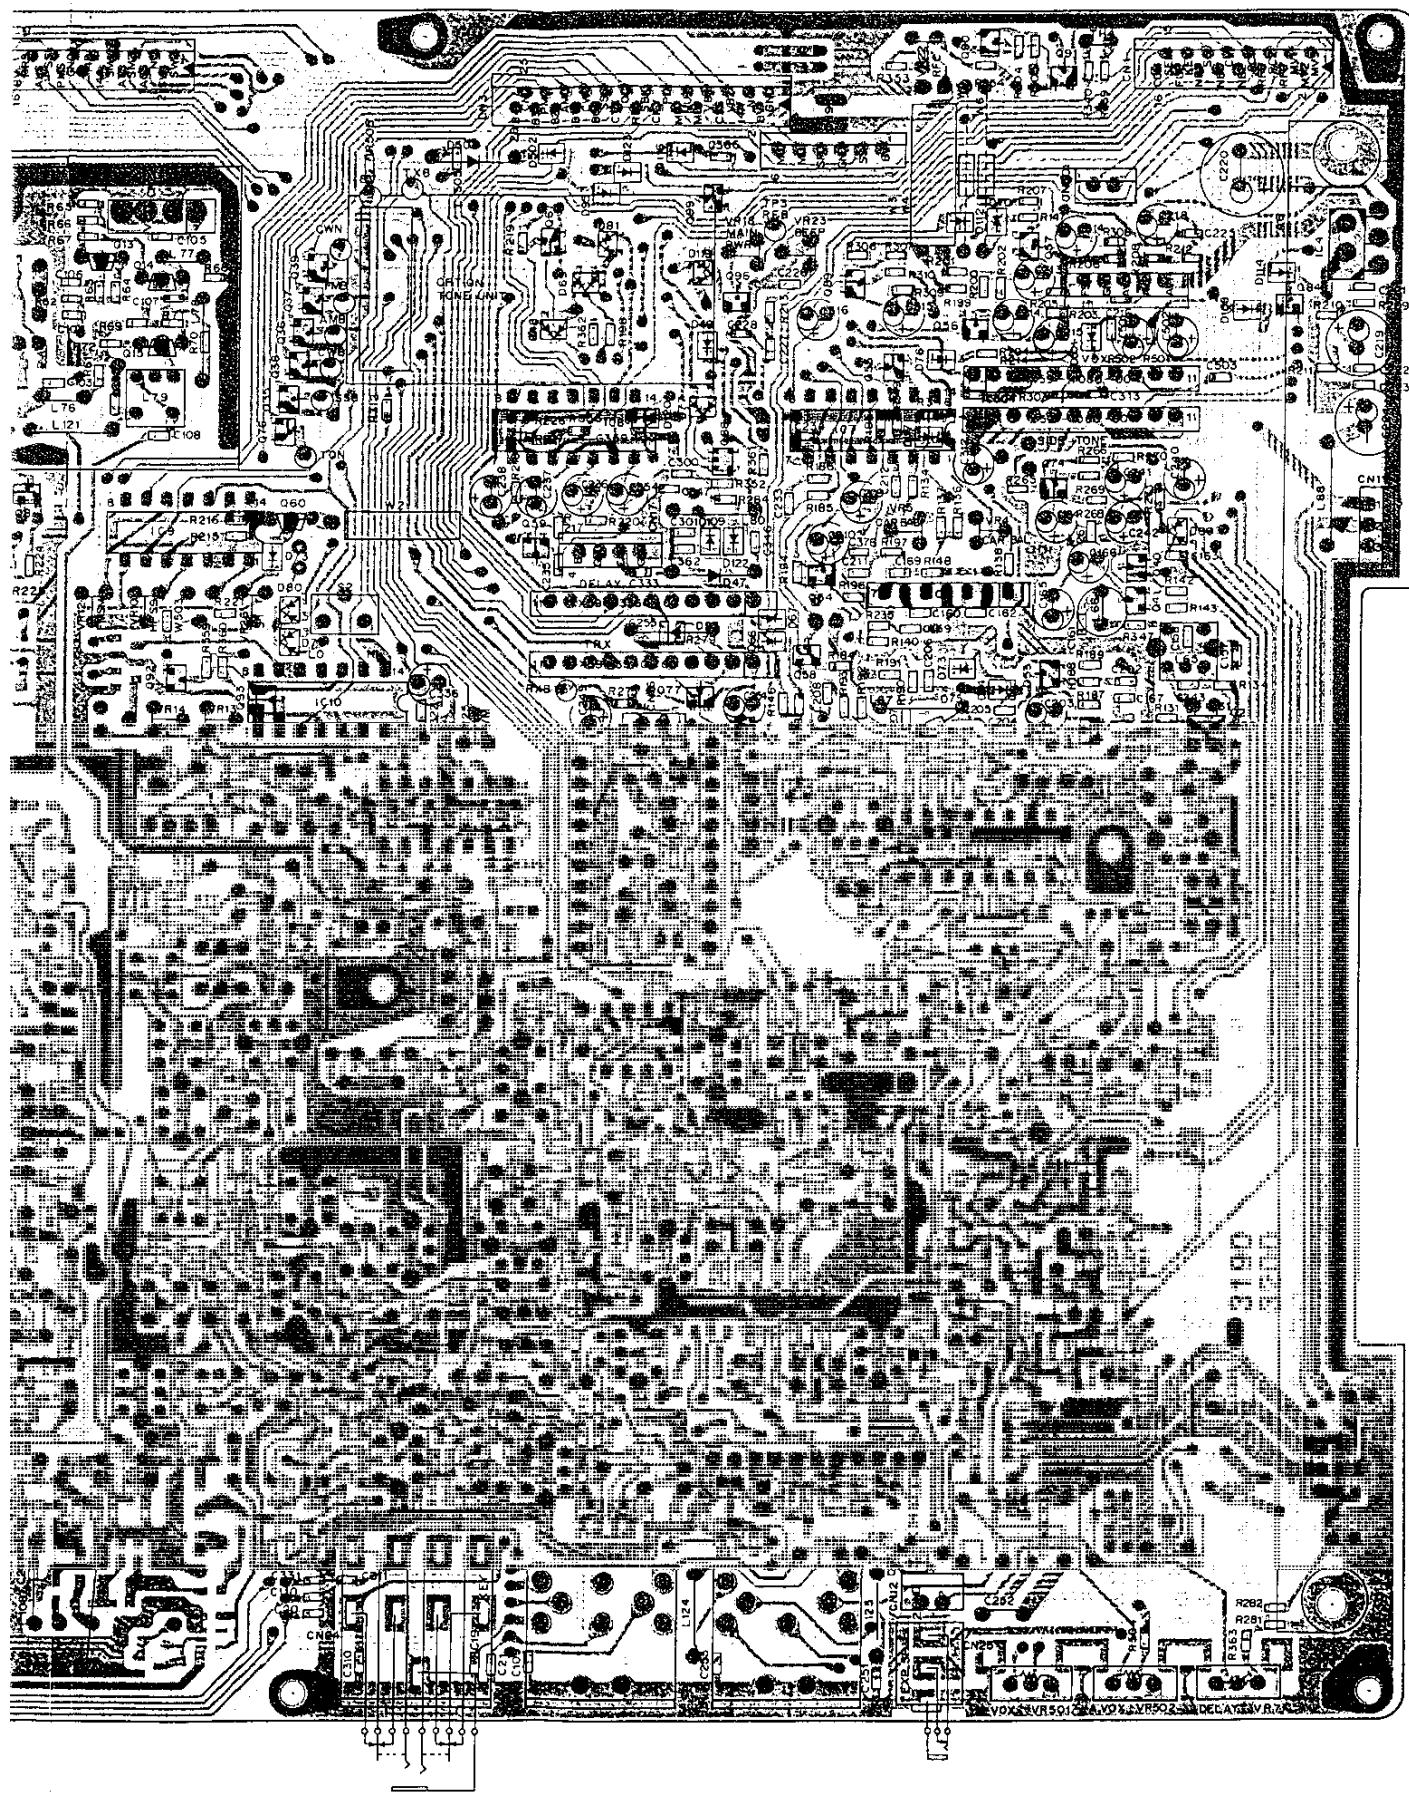

SIGNAL UNIT (X57-3200-XX)


SIGNAL UNIT (X57-3200-XX) -10[K,M,T] -61[W]

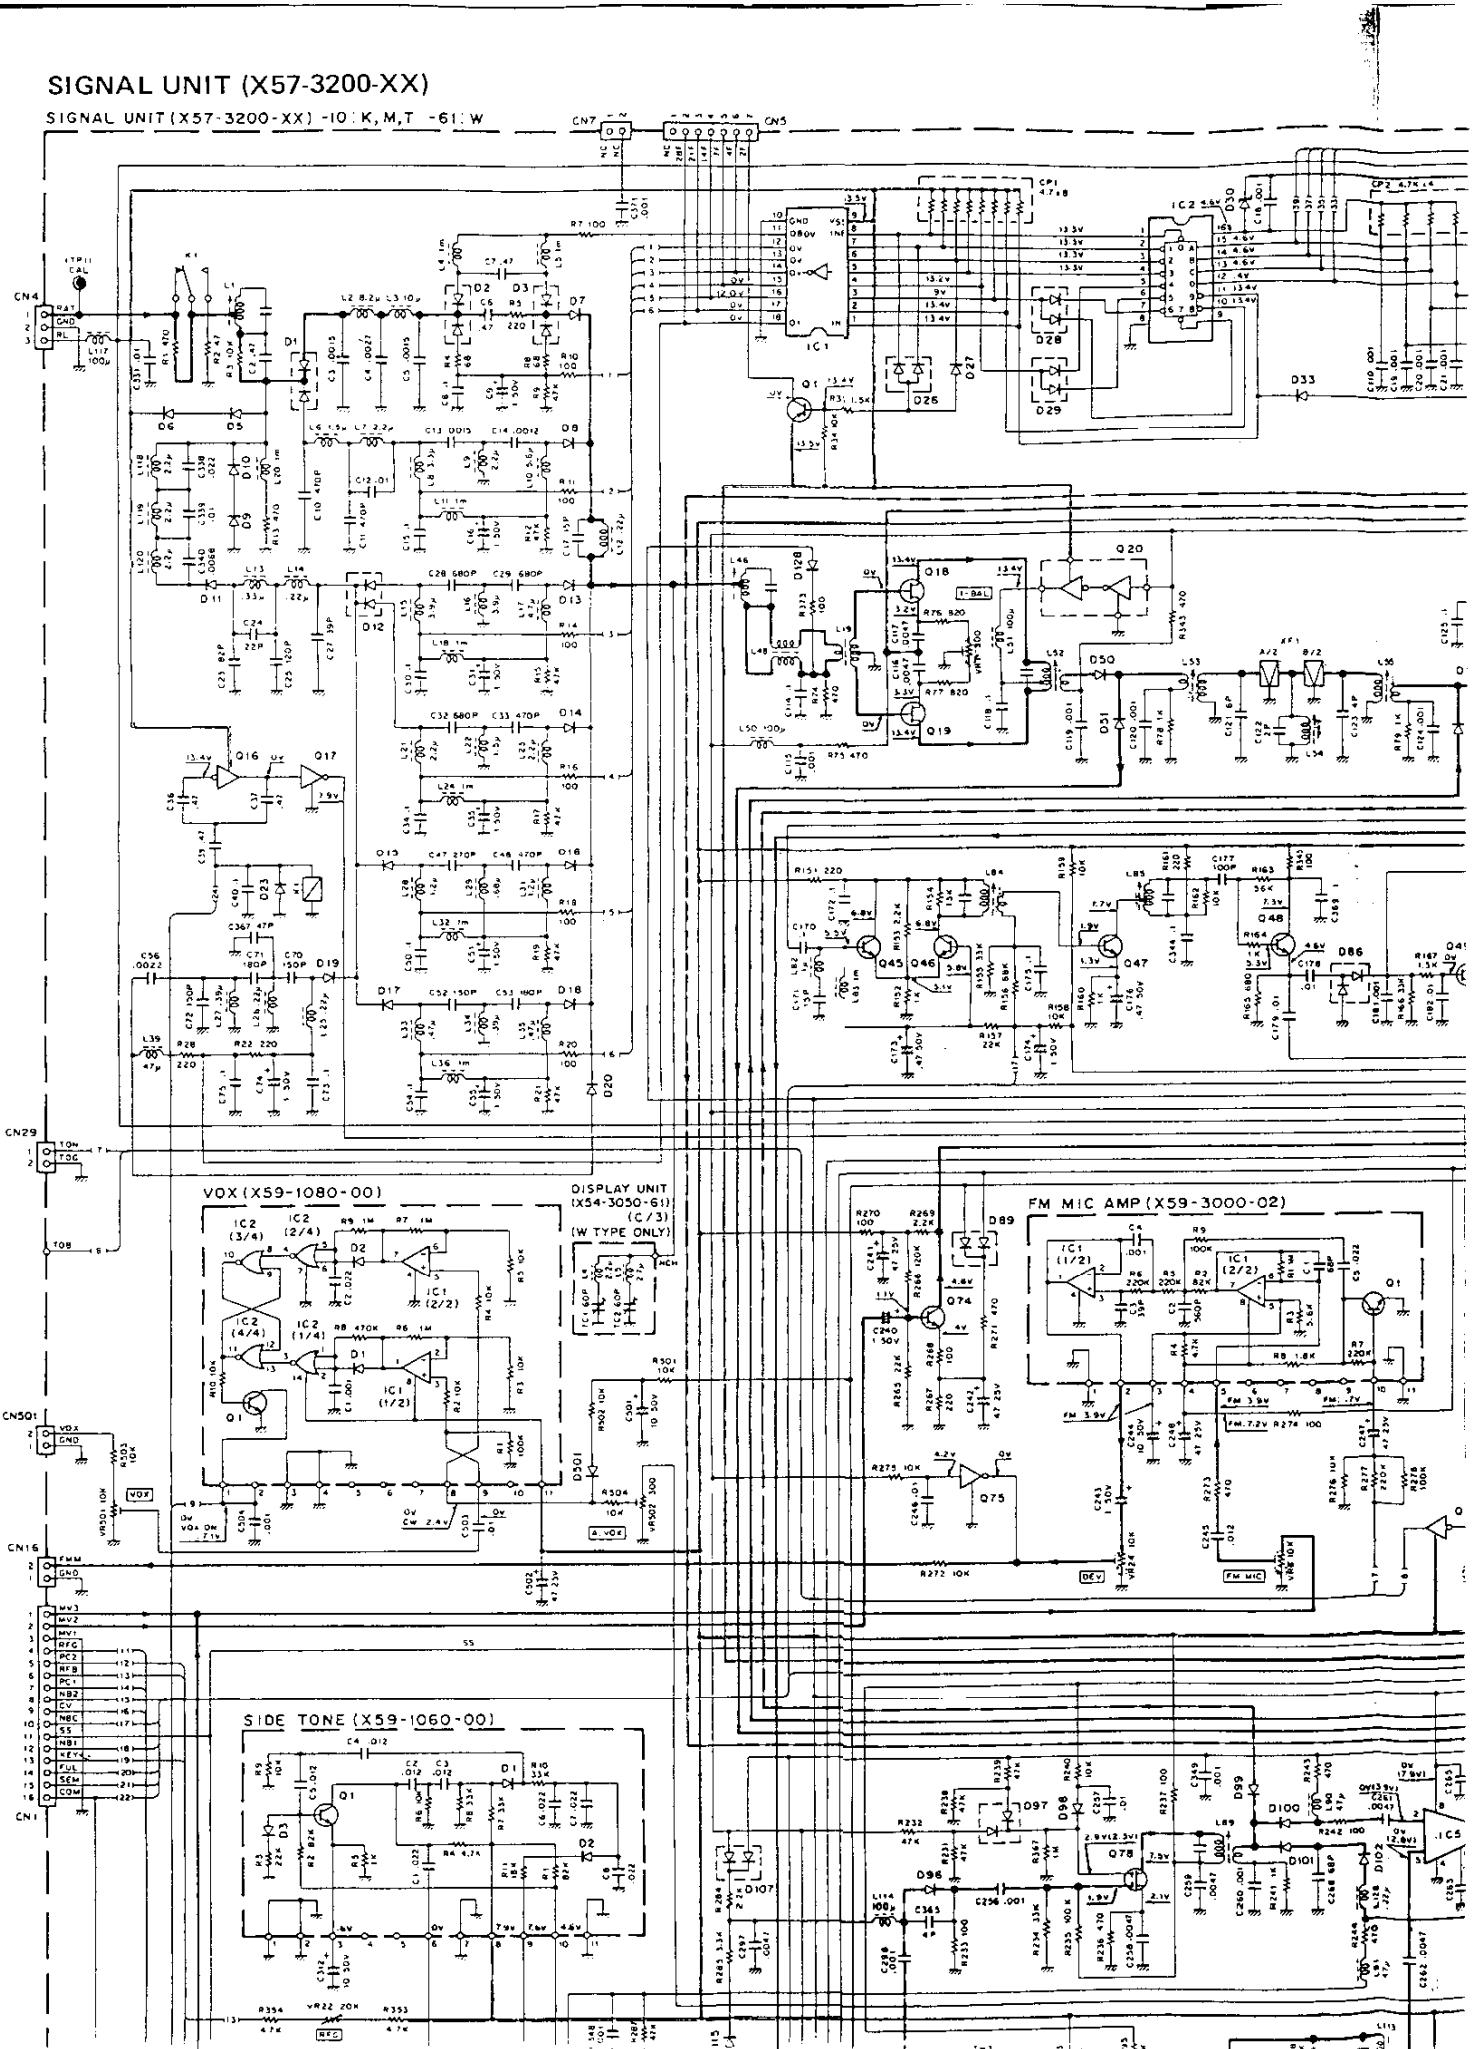

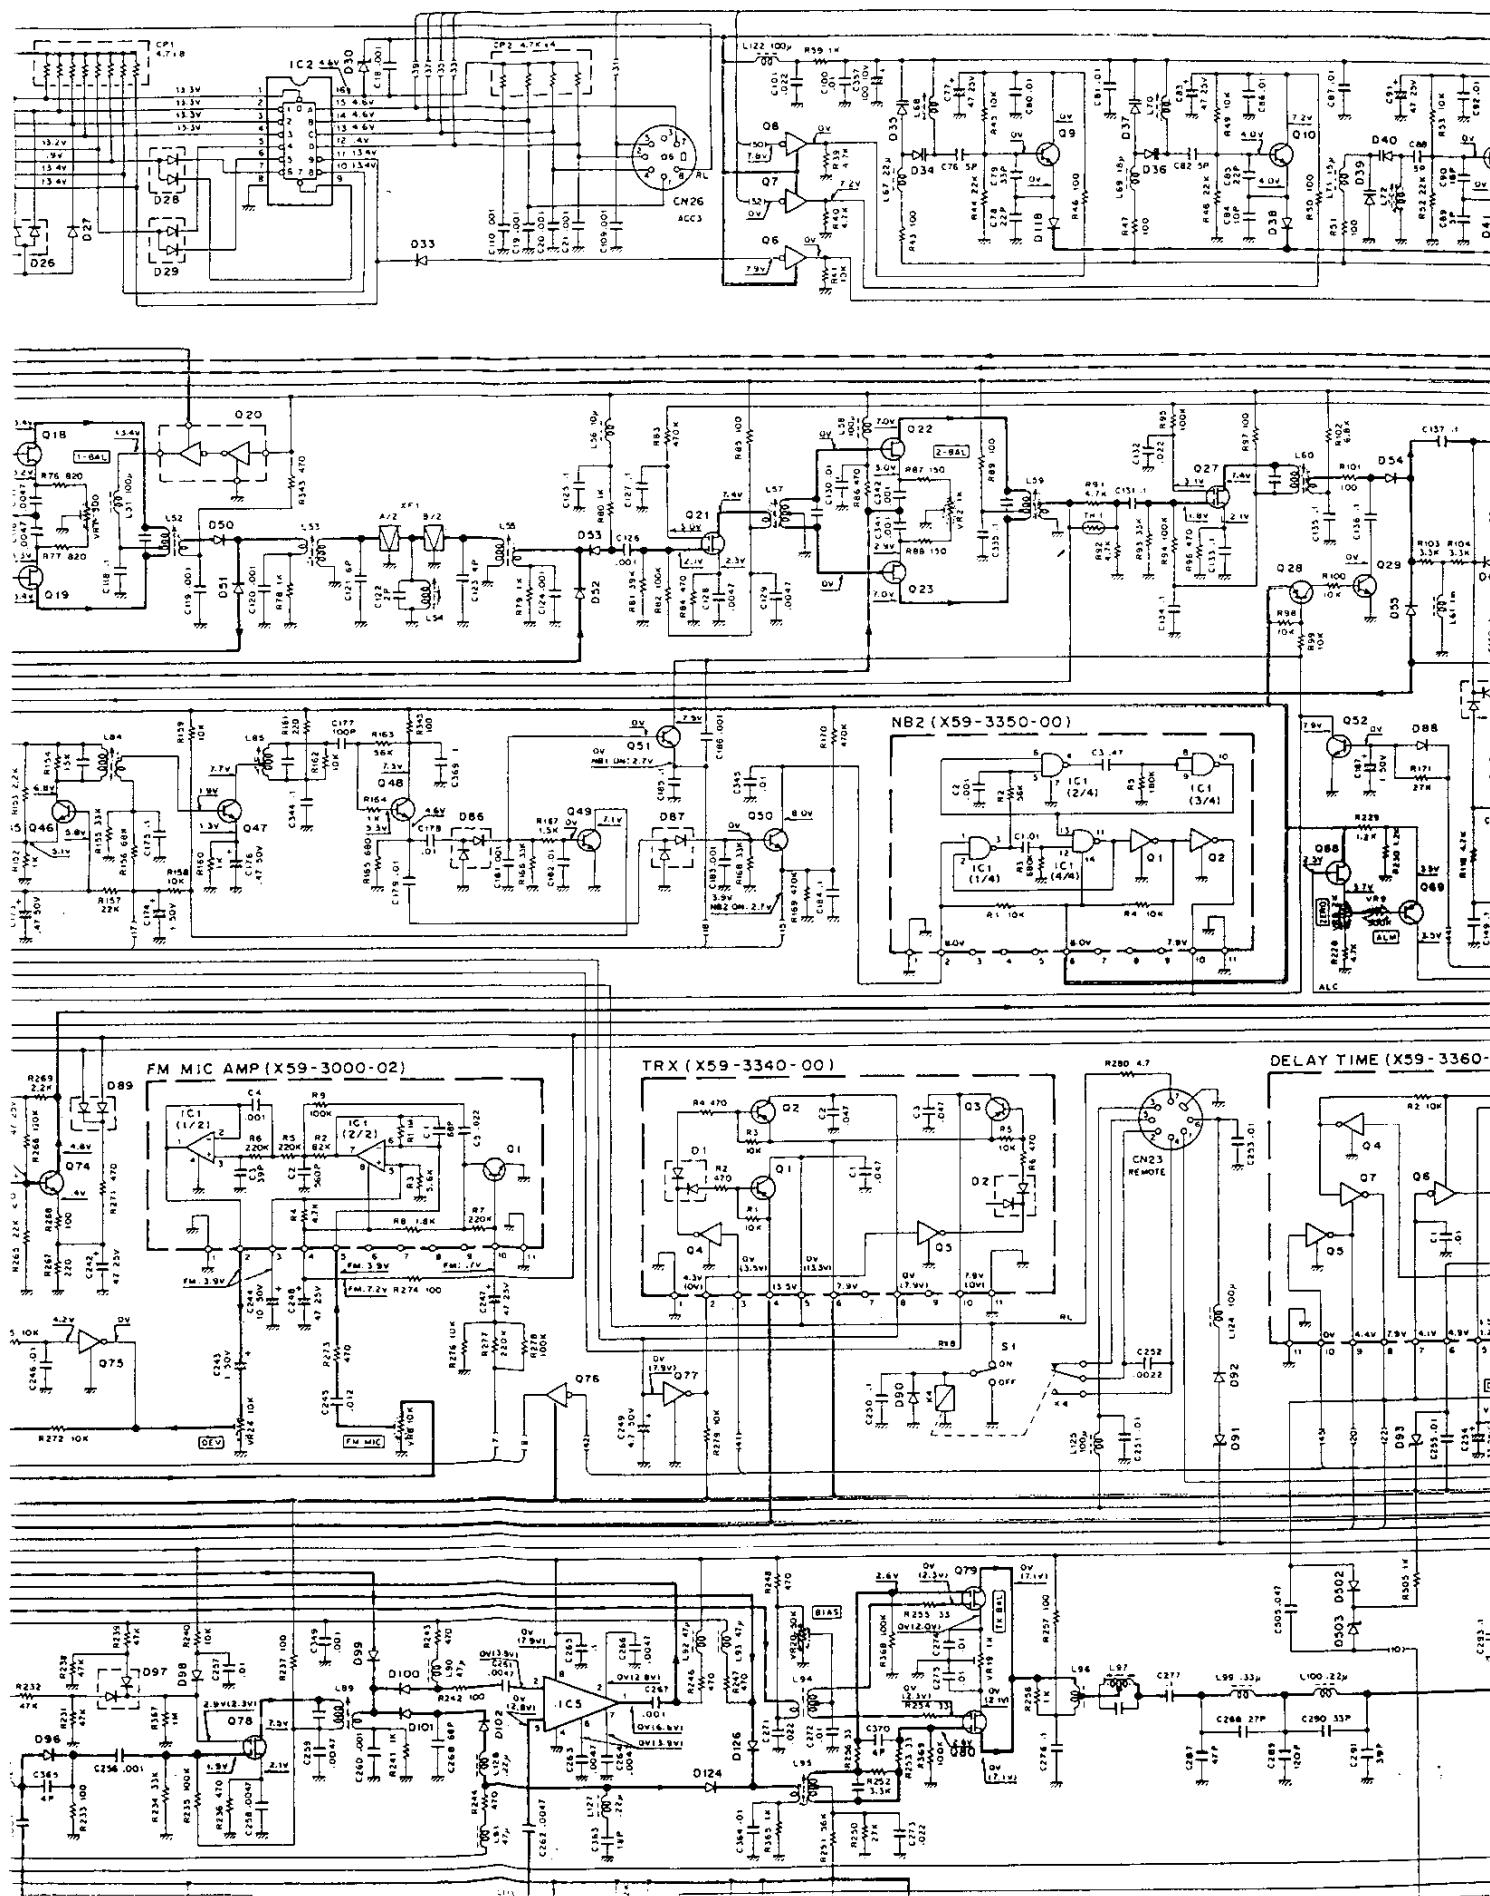


Voltage measurement condition $f = 14\text{MHz}$, Mode : USB, () : TX.

CIRCUIT

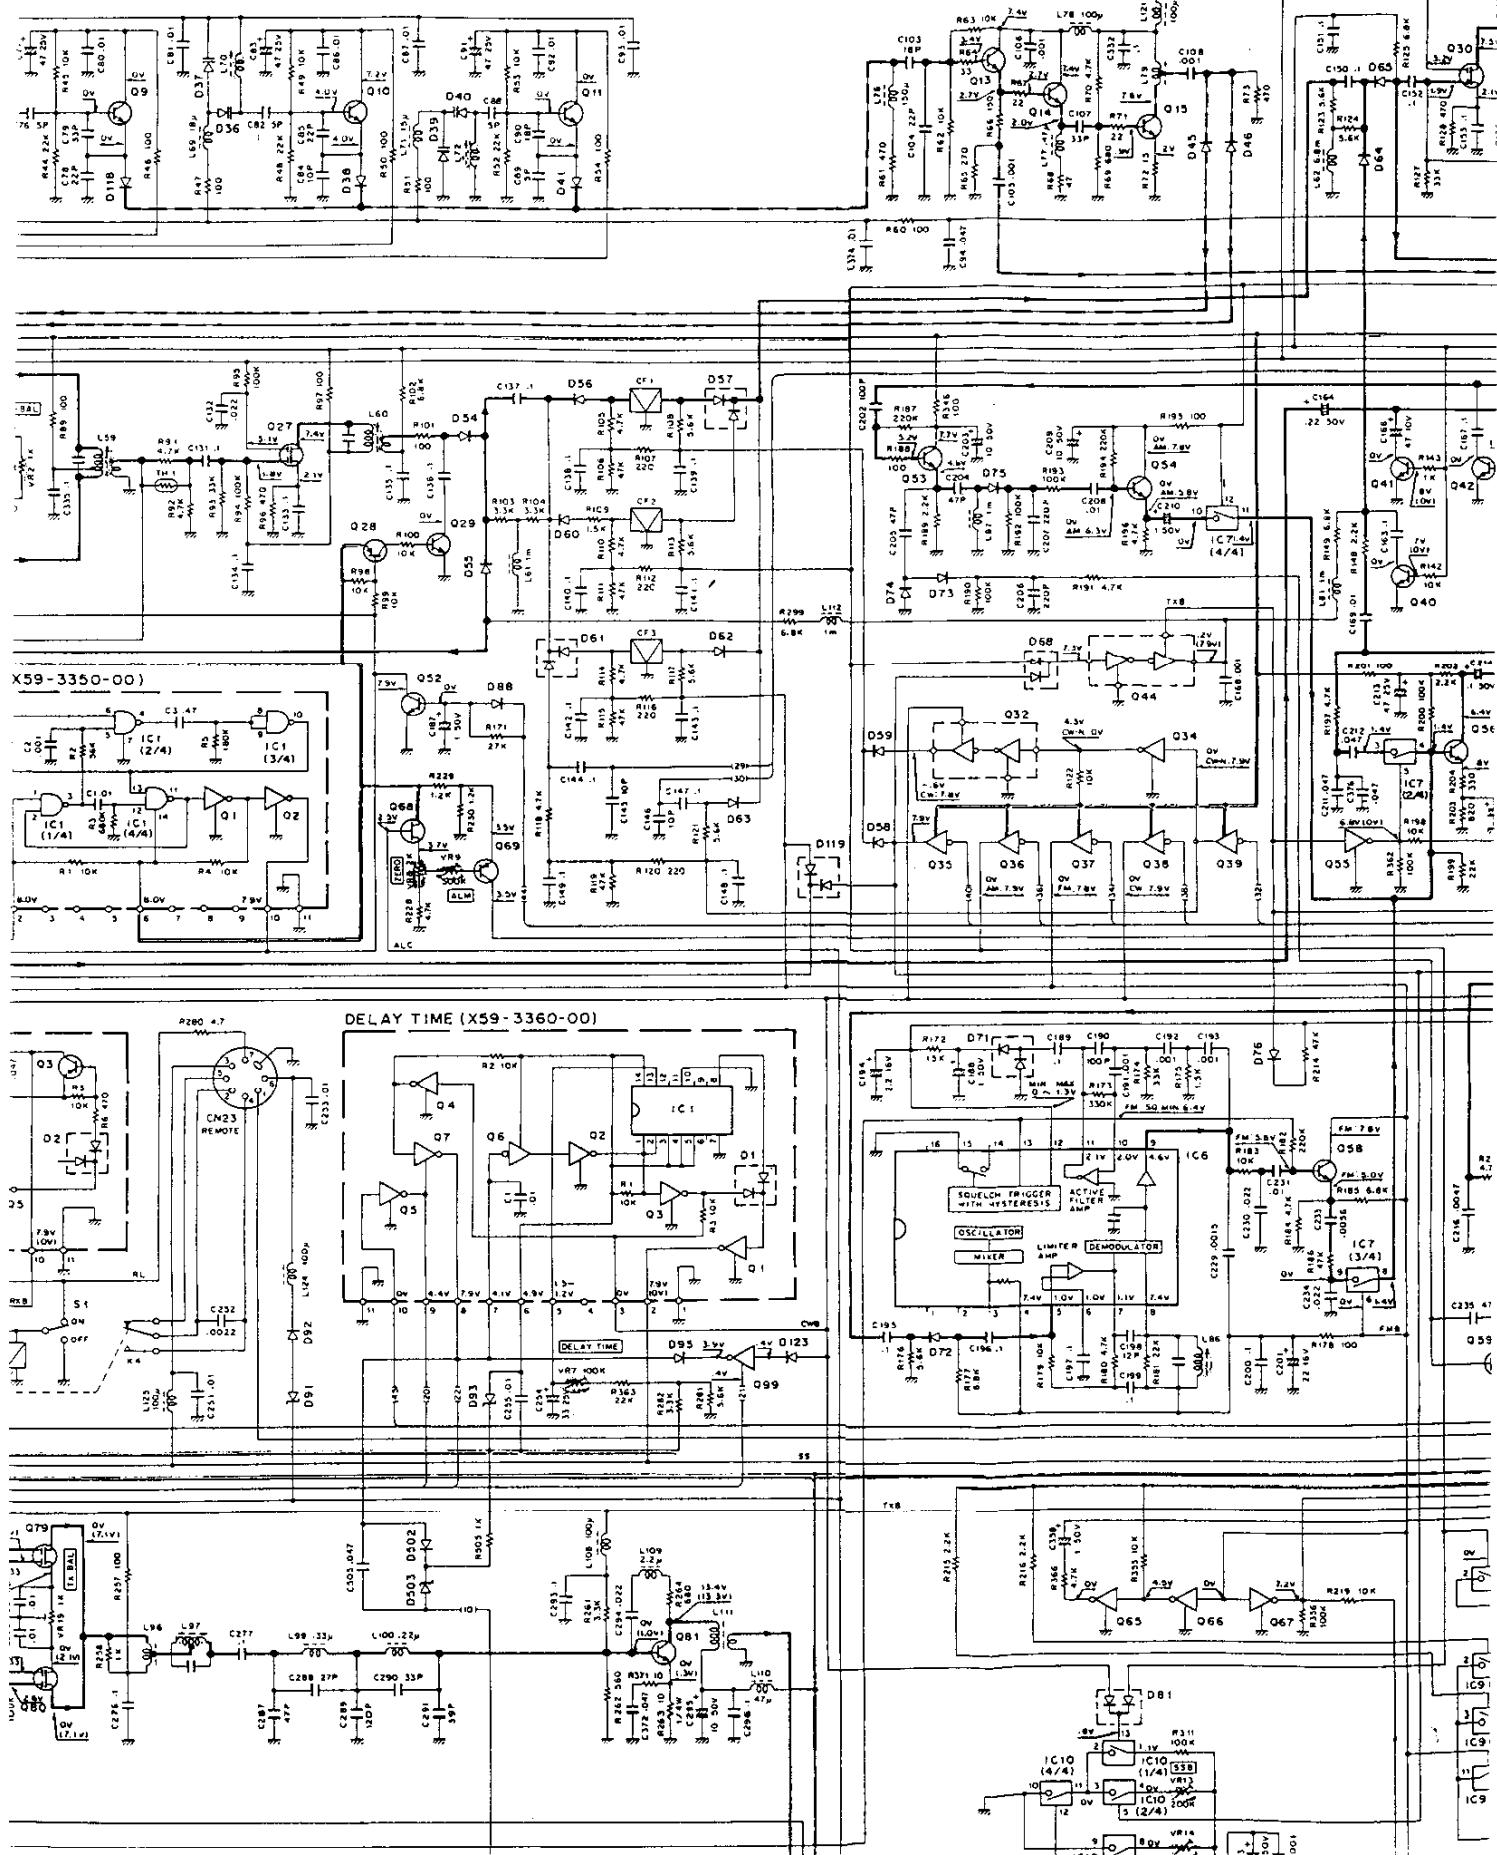

CIRCUIT DIAGRAM (TS-140S) TS-140S/680S

ion f = 14MHz, Mode : USB. () : TX.

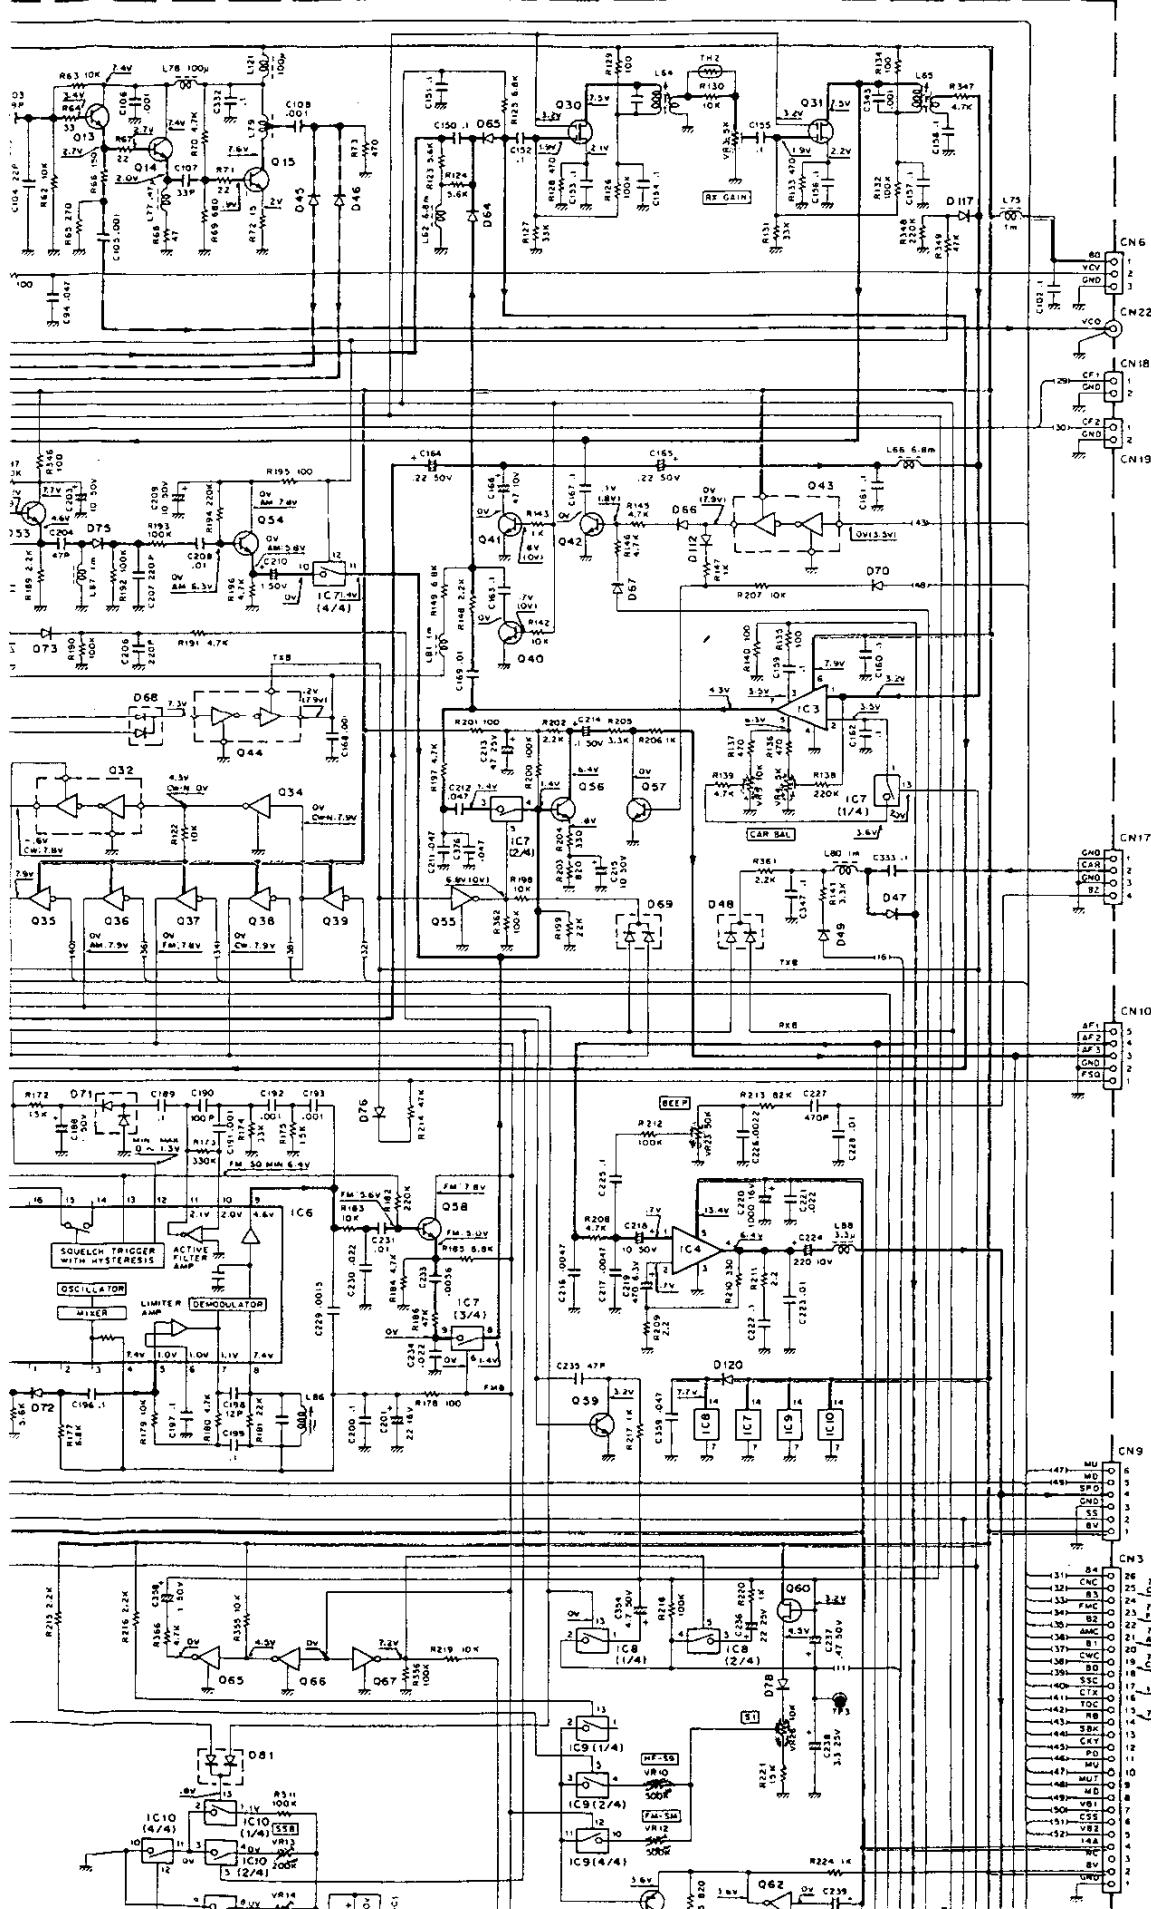

MAURITRON TECHNICAL SERVICES

TEL: 01844 - 351694
FAX: 01844 - 352554

**FOR SERVICE MANUALS
CONTACT:**

[X57-3200-XX]	
Q1,28,61,69,87,90	: 25A1162(Y)
Q17,34,55,65~67,75,77,84,	
91,92,96,97,99,	: DTC114EK
Q6~8,35~39,76	: DTA143EK
Q9~11,13	: ZSC2668(Y)
Q14	: 2SC1907
Q15,81	: 2SC2053
Q16	: DTA114EK
Q18,19,22,23	: 2SK125-5
Q20,32,43,44,82,88	: FMC3
Q21,79,80	: 3SK122(L)
Q27,30,31,78,86	: 3SK733(R)
Q29,40~42,43~44,58~59,	
74,89,98	: 2SC2712(Y)
Q60,68	: 2SK192(Y)
Q62,93	: DTC114TK

IC 1	: M54581P
IC 2	: M74LS14SP
IC 3	: AN612
IC 4	: μPC2002V
IC 5	: SN76513P
IC 6	: MC3357P
IC 7 ~ 10	: TC4066BP
IC 11	: LM324N
IC 12	: AN7808

D 1 ~ 3, 12	: D4H235K
D 5, 10	: US1090
D 6, 9	: VOB(G)
D 7, 8, 11, 13 ~ 20, 38, 41, 45, 46, 50 ~ 53, 99 ~ 102, 109, 110, 118, 122, 124, 126	: RLS135
D 23, 90	: 151355
D 48, 57, 61, 68, 69, 77, 79 ~ 81, 85, 89, 97, 107, 119	

O 26, 28, 29	: DAN202K
O 27, 33, 49, 54~56, 58~60,	: DAP202K
62, 67, 70, 72~74, 76, 78, 83,	
88, 92, 93, 108, 112~15, 117, 120,	
125, 128, 501, 502	: RLST3
D 30, 93, 503	: UZ-3.08
D 34~37, 39, 40	: ITT310TE
O 47, 96	: MW204
D 71, 82, 86, 87	: HSM88AS
D 91	: MT29.1JB
O 111	: KB-369
D 116, 125	: RLZ3.6B
D 75, 98	: IN60PSPA


(X59-1069-00)
Q1 : ZSC2712(Y)

D1,3 : DAN202K
D2 : DAP202K


(X59-1080-00)
Q1 : 25C2712(Y)

IC1 : NJM2904M
IC2 : TC4001BF


01.2 : DAP 202K

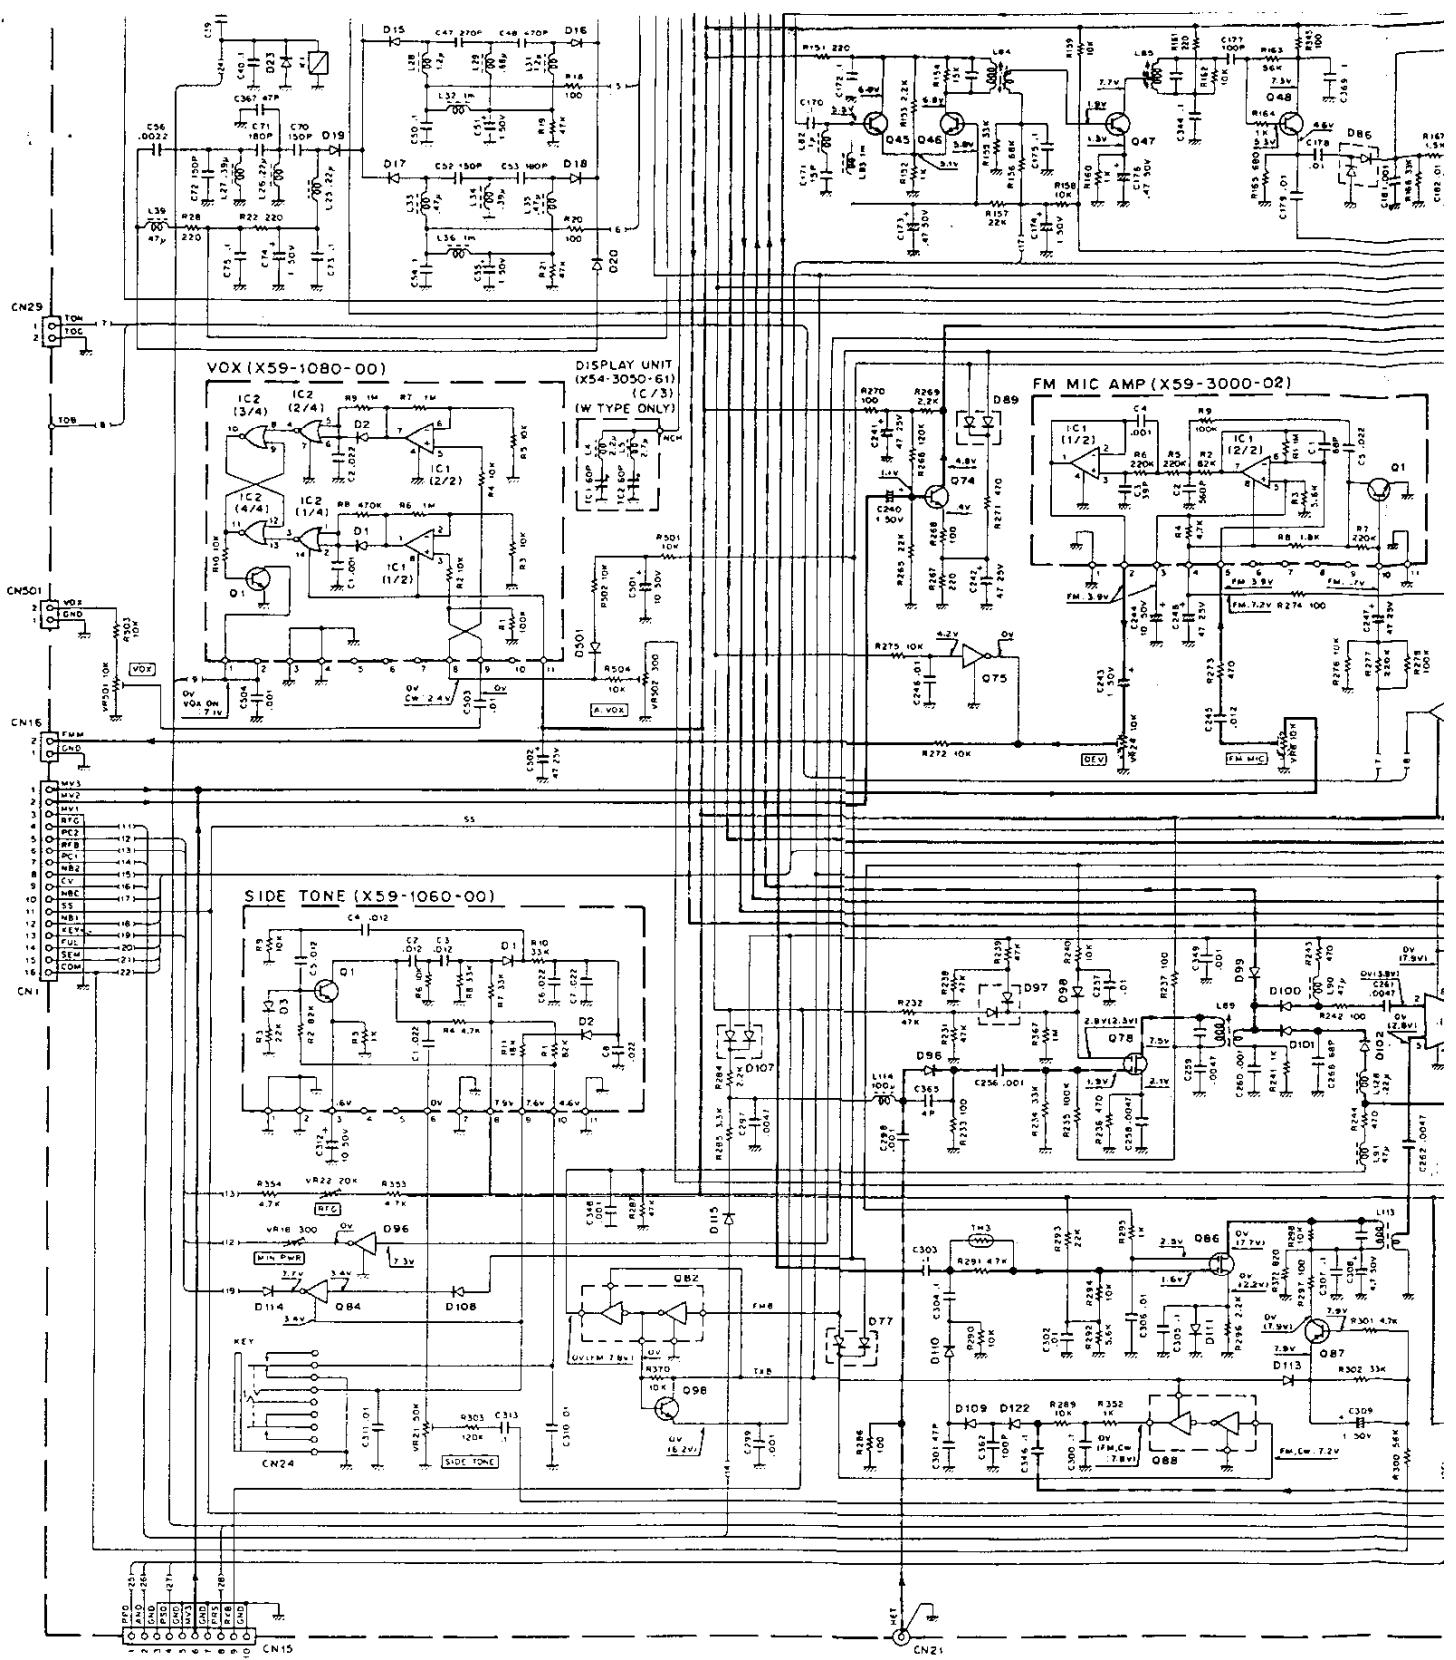


M74LS145P




μPC2002V




SN16913P




MC3357P




AN7808



AN612



TC4066B




**FOR SERVICE MANUALS
CONTACT:**

TRON TECHNICAL SECTION


www.mauritron.co.uk

TEL: 01844 - 351694


TC4001BF
TC4011BF





MB74LS122



M54581P



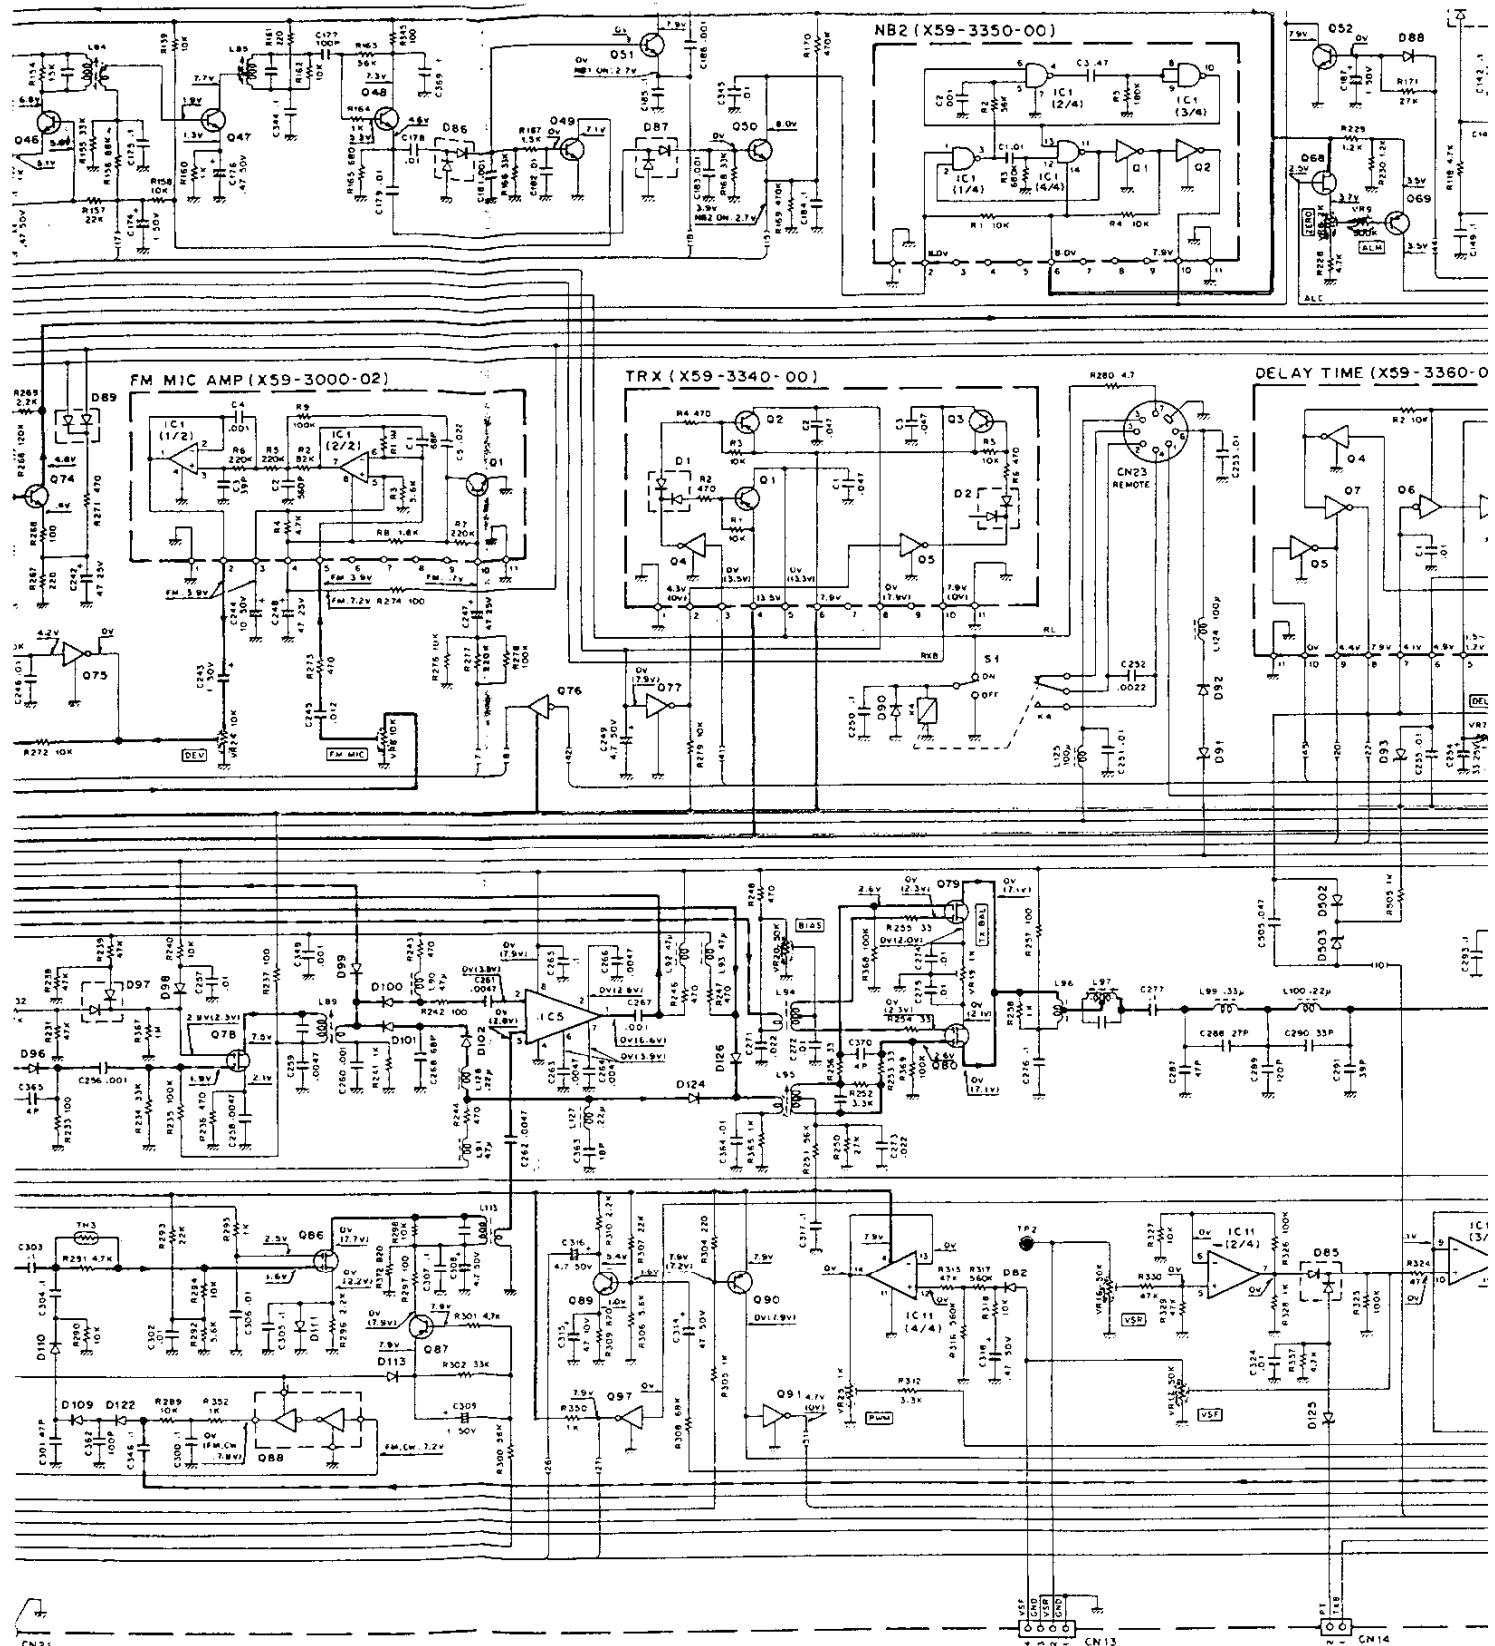


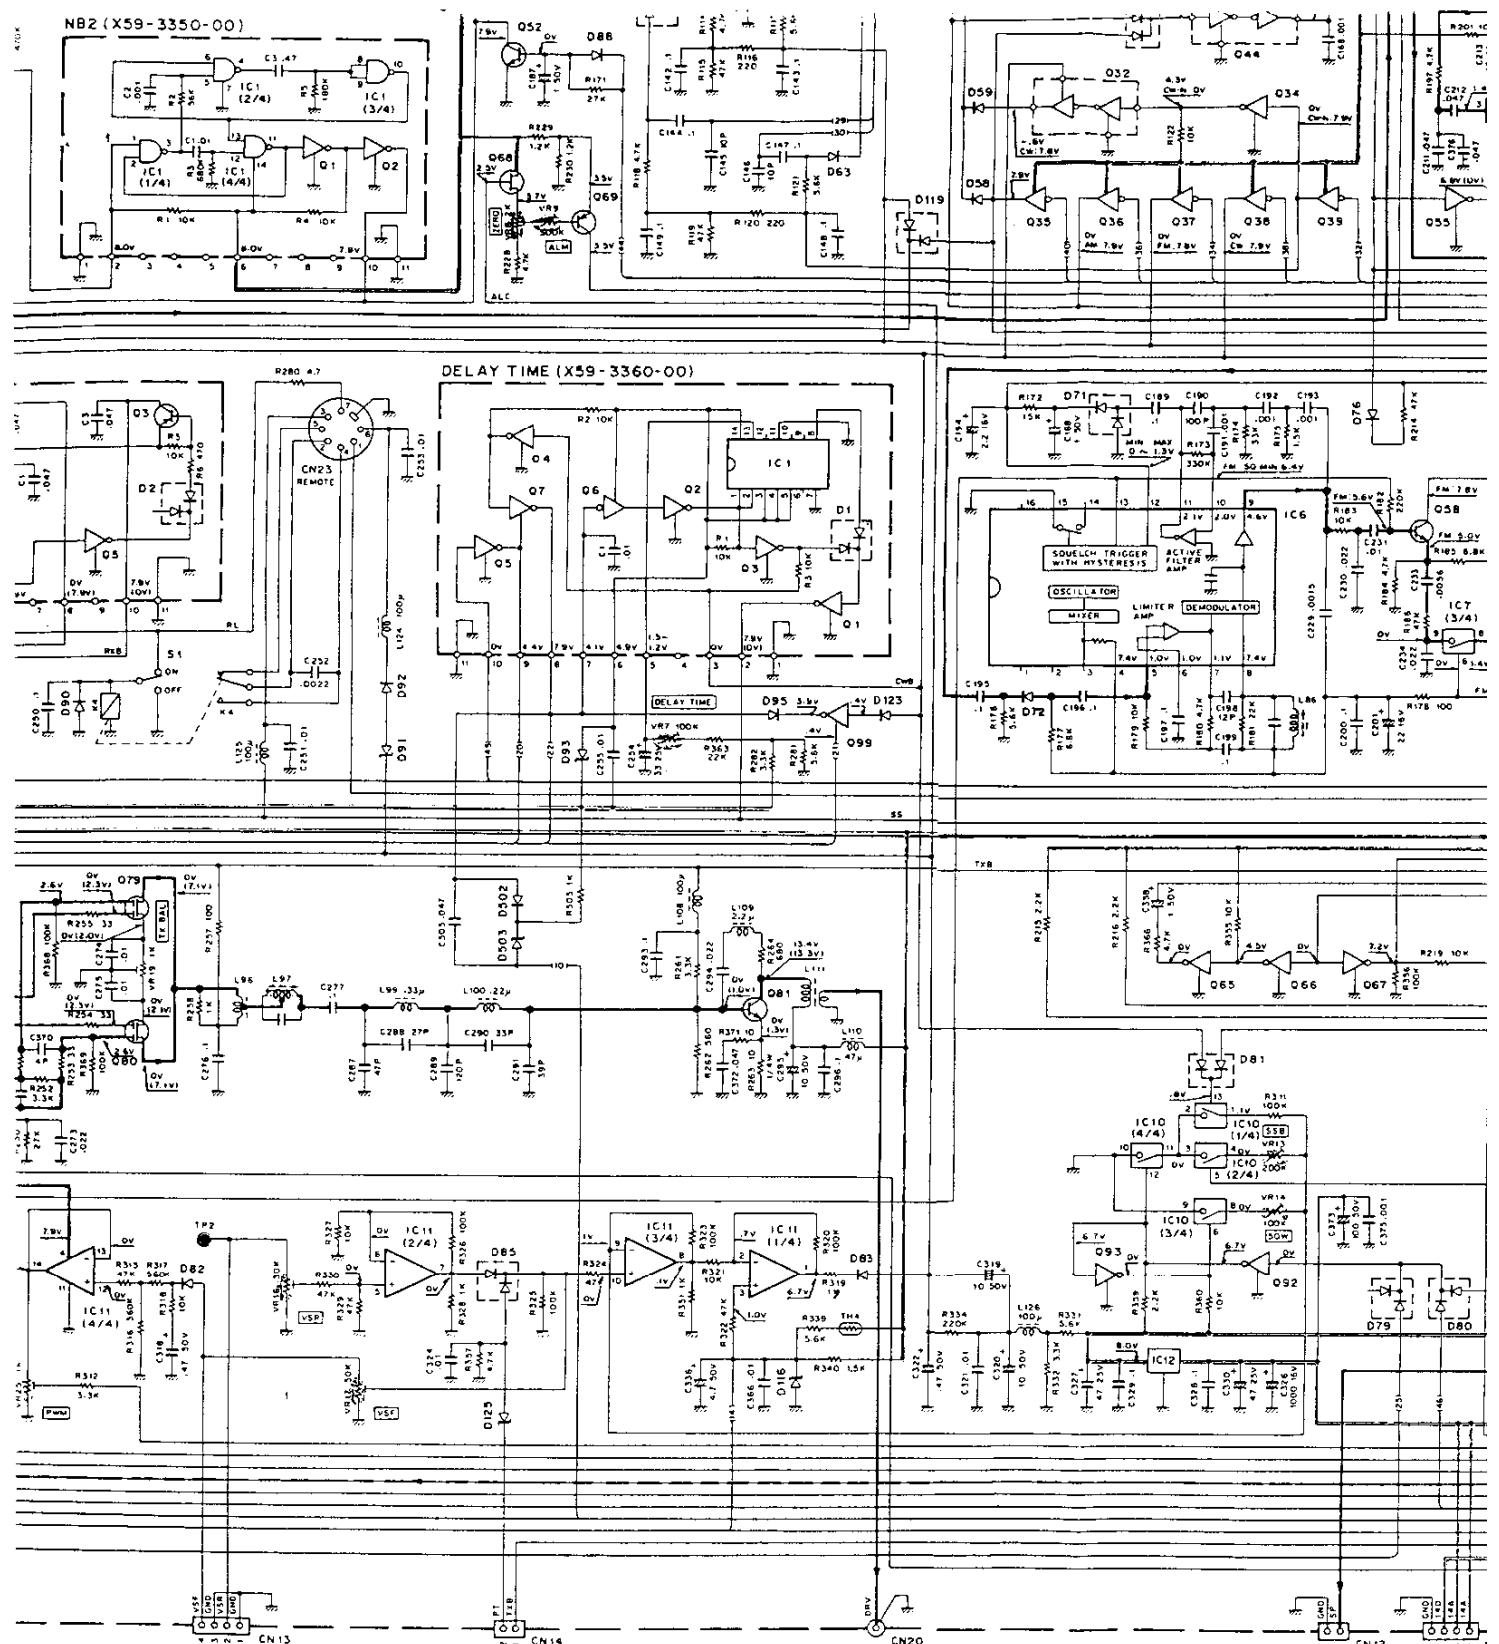

2SA1162(Y)
2SA1182(Y)
2SC2712(Y)
DTA114EK
DTA143EK
DTC114EK
DTC114TK



2SC2053



2SC1907

2SK125-5

FMC3

35K122(L)



3SK73(GR)


**FOR SERVICE MANUALS
CONTACT:**

TRON TECHNICAL SER

www.mauritron.co.uk

TEL: 01944 - 351694




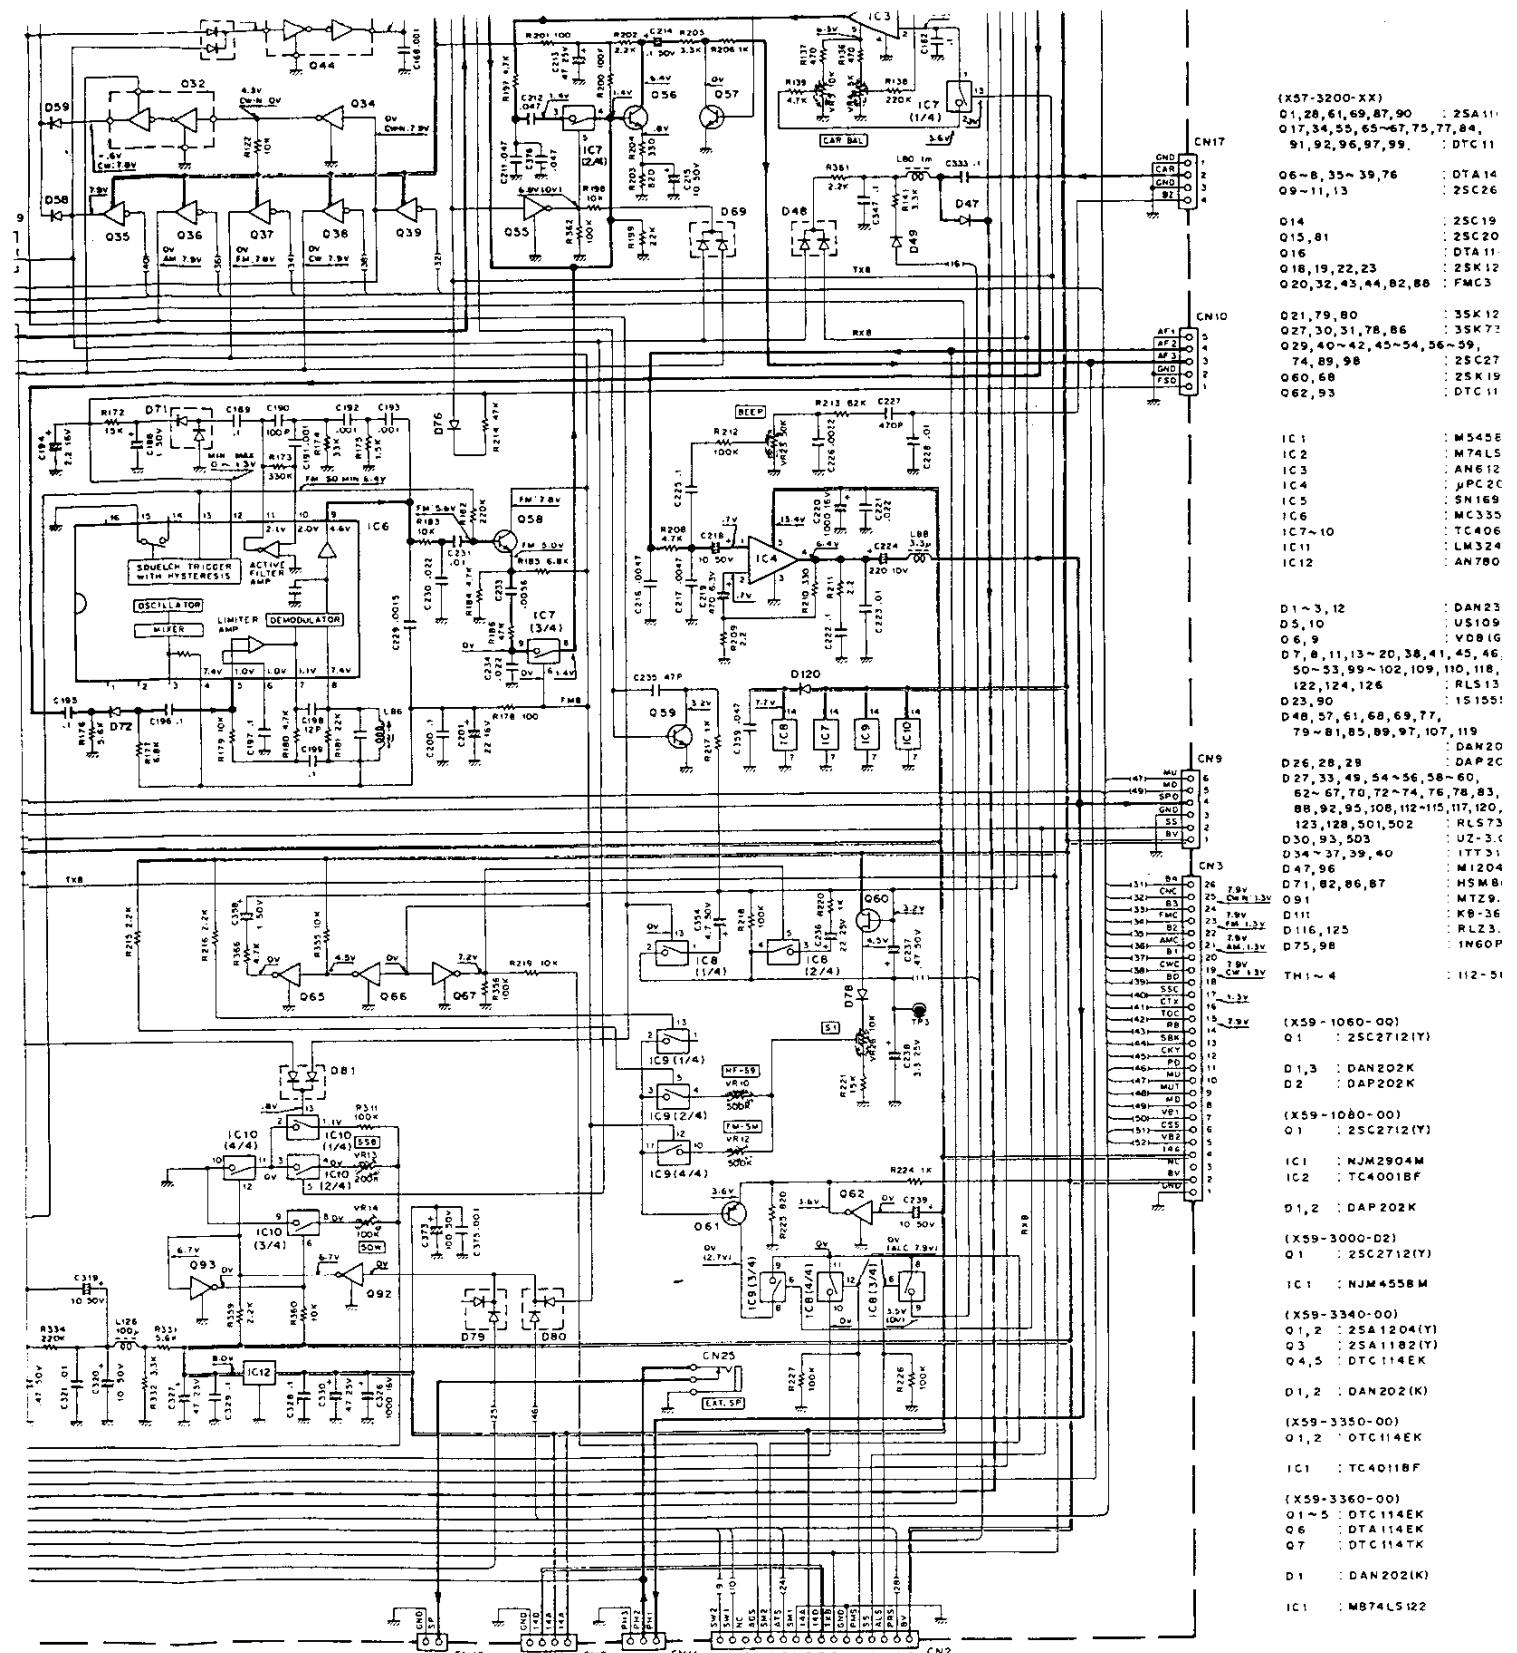


EMC3




3SK122(L)




3SK73(GR)




2SC2668(Y)



2SK192A(Y)
2SK192A(GR)*J



NJM2904M
NJM4558M





2SA1204(Y)




PC BOARD VIEWS TS-140S/680S

SWITCH UNIT (X41-3030-XX) -00 : TS-680S -11 : TS-140S Component side view

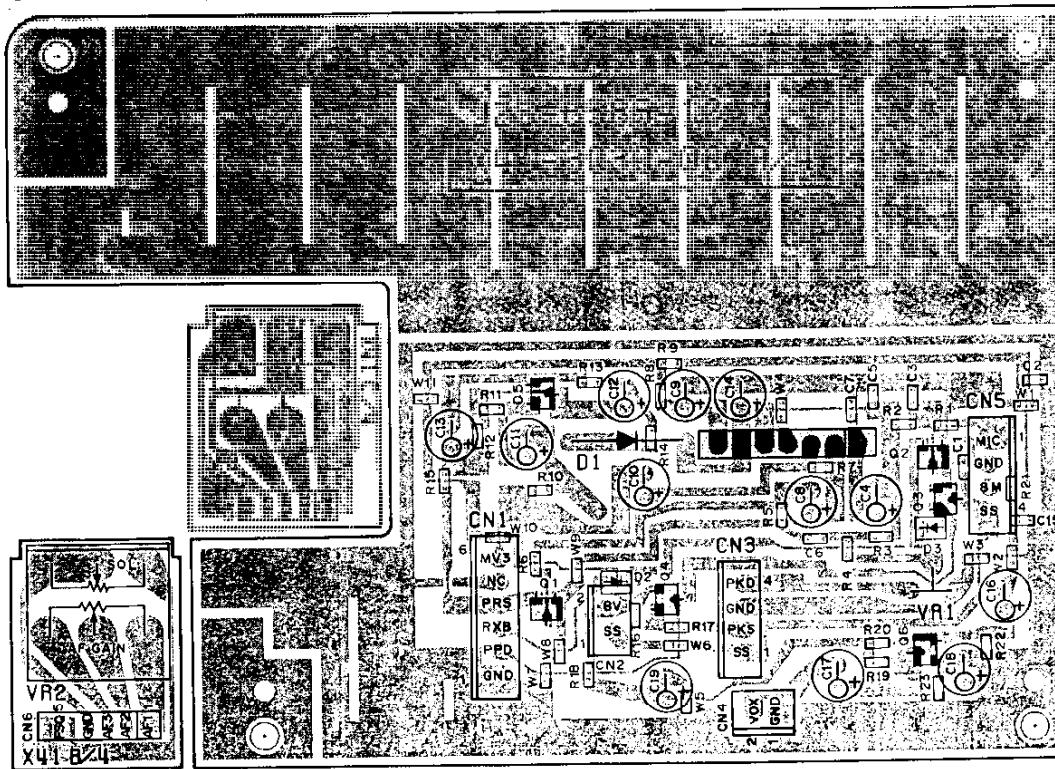

SWITCH UNIT (X41-3030-XX) -00 : TS-680S -11 : TS-140S Foil side view

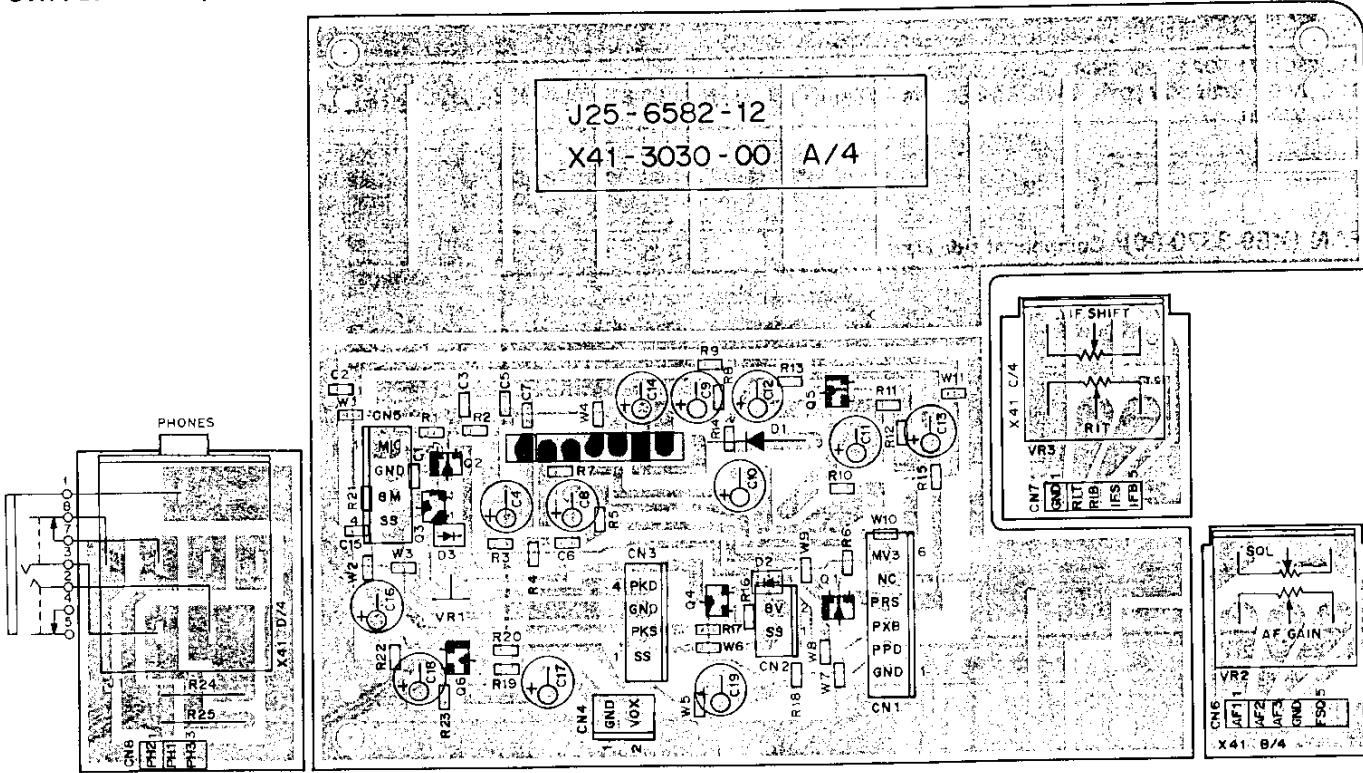


Q1~3 : DTC114EK Q4 : 2SA1162(Y) Q5,6 : 2SC2712(Y)
IC1 : μPC1158H2
D1 : 1N60 D2,3 : BLS73

CN4,Q6 }
C16--C19 } TS-140S only
B18--B23 }

μPC1158H2


2SA1162(Y)
2SC2712(Y)
RTG114EK




8

TS-140S/680S PC BOARD VIEWS

FINAL UNIT (X45-3100-XX) -00 : TS-680S -11 : TS-140S Component side view

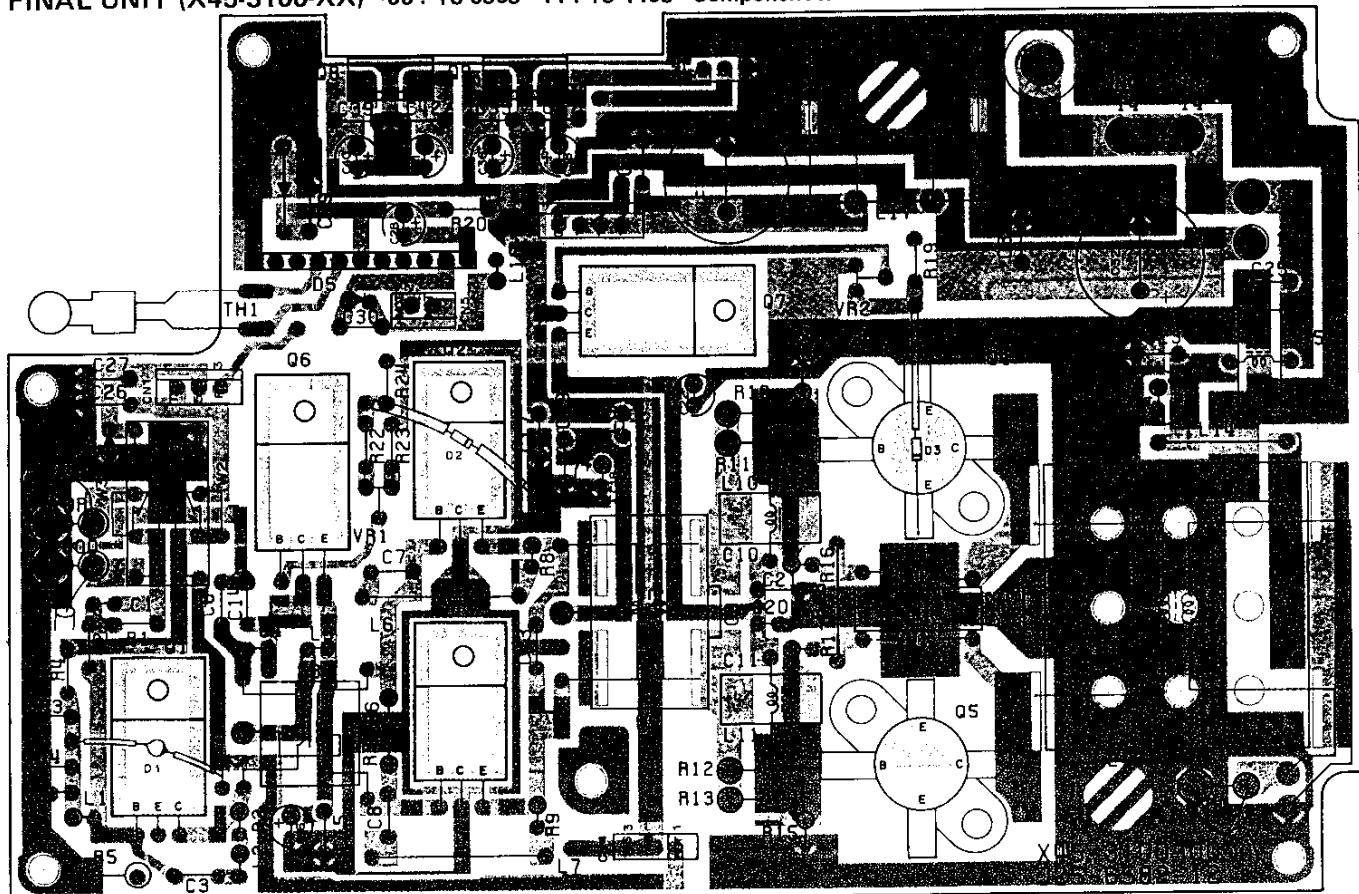

FILTER UNIT (X51-3040-00) : TS-680S Component side view

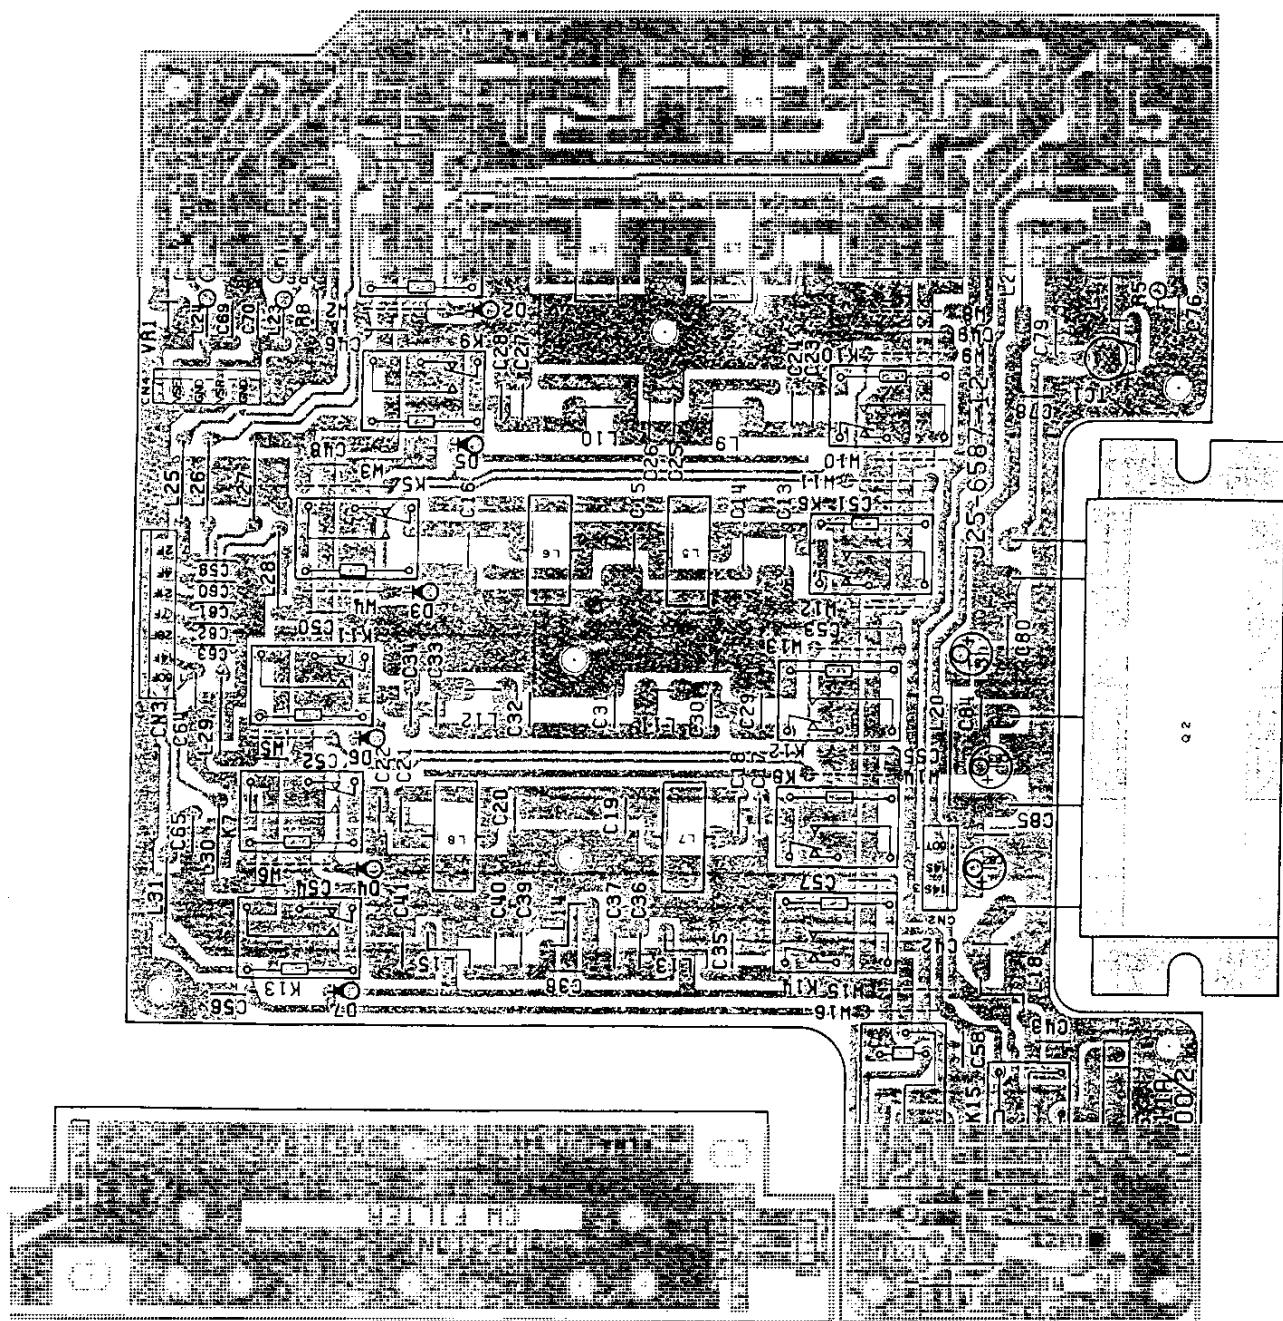

: 2SC2538-22-A Q2 : M57735 Q3 : 2SC2459(BL)
-8 : 1S1555 D9,10 : 1SS101 D11 : DSP301N

F


G

H

J

PC BOARD VIEWS TS-140S/680S

FILTER UNIT (X51-3040-11) : TS-140S Component side view

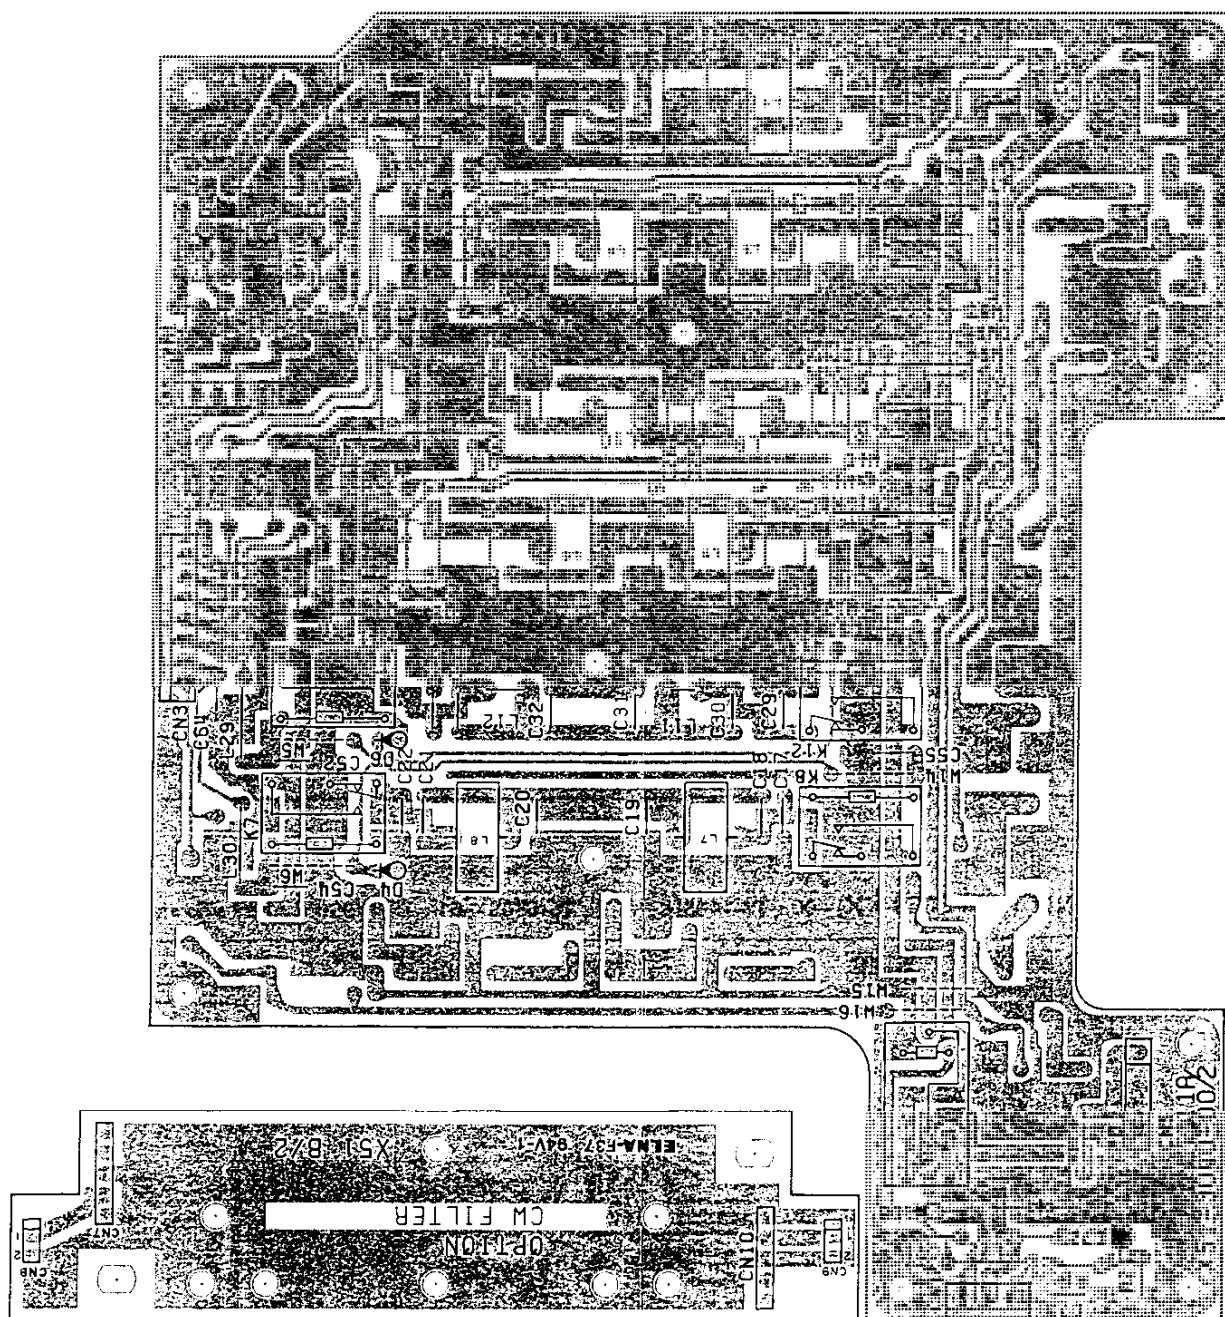

Q3 : 2SC2459(BL)
D1-6,8 : 1S1555 D9,10 : 1SS101 D11 : DSP301N

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICES


www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554


TS-140S/680S PC BOARD VIEWS

DISPLAY UNIT (X54-3050-XX) -00 : TS-140S(K, M, T), TS-680S -61 : TS-140S(W) Component side

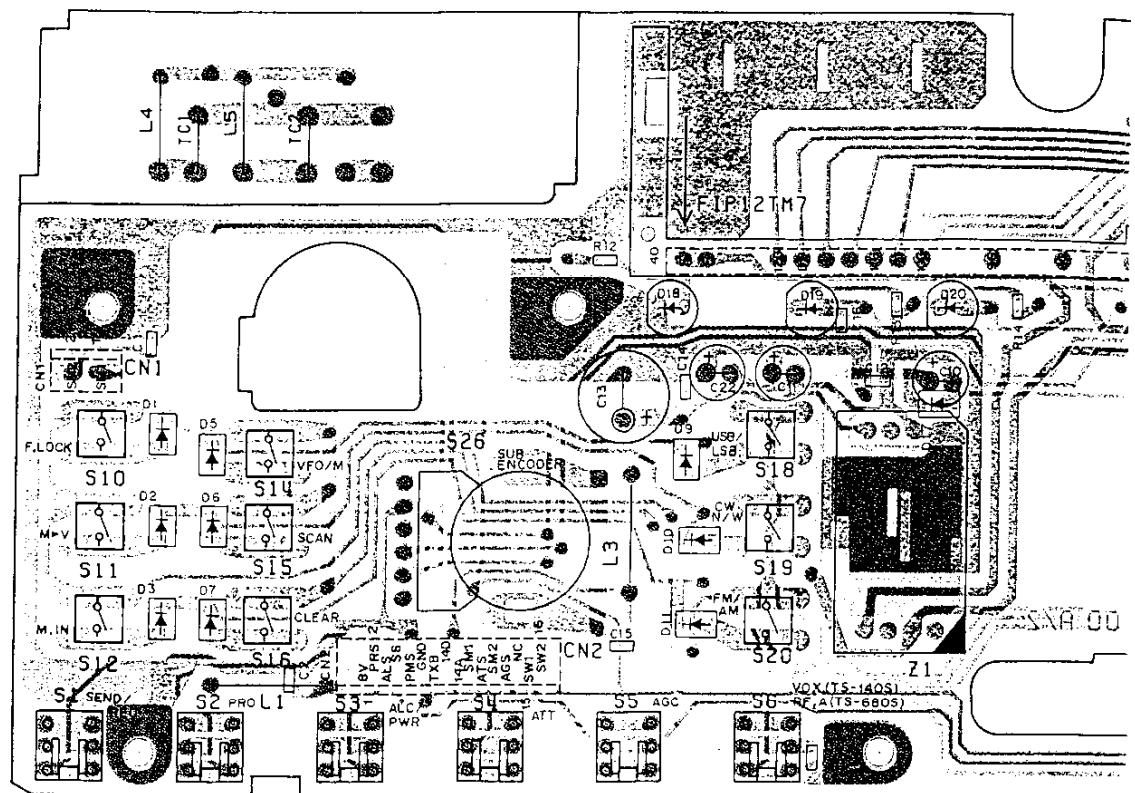

4


DISPLAY UNIT (X54-3050-XX) -00 : TS-140S(K, M, T), TS-680S -61 : TS-140S(W) Foil side view

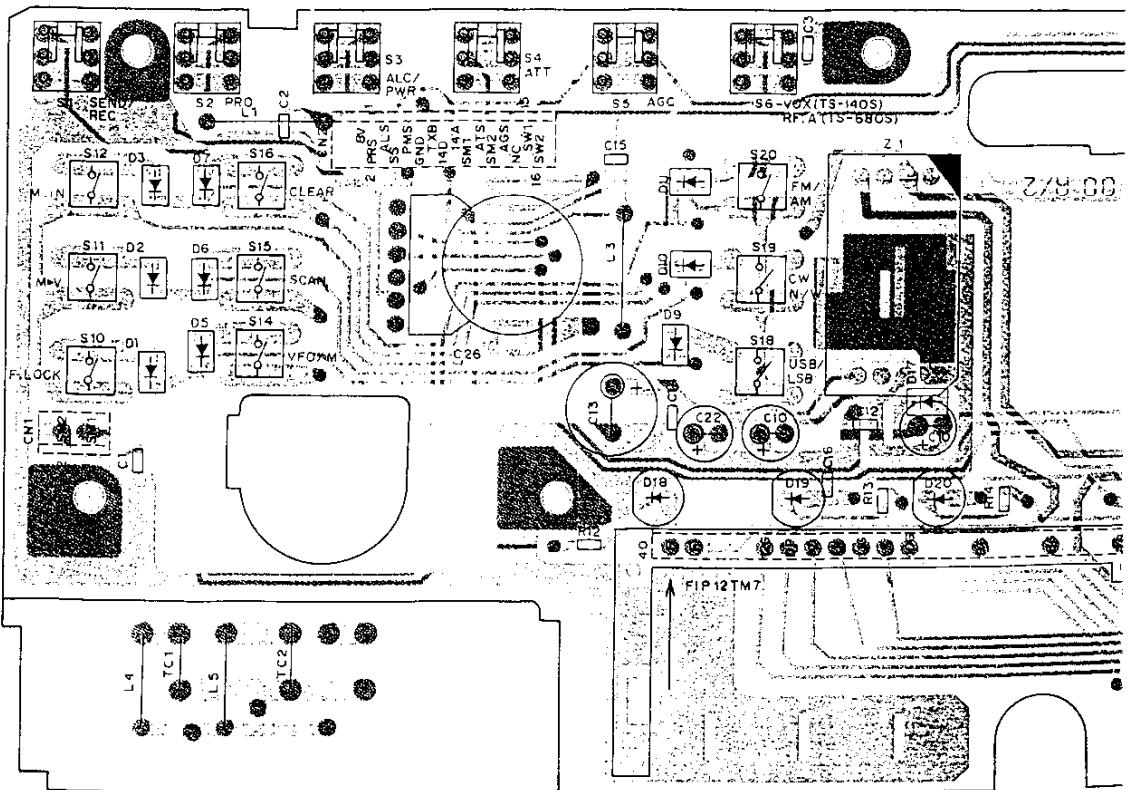

119

10S PC BOARD VIEWS

-3050-XX) -00 : TS-140S(K, M, T), TS-680S -61 : TS-140S(W) Component side view

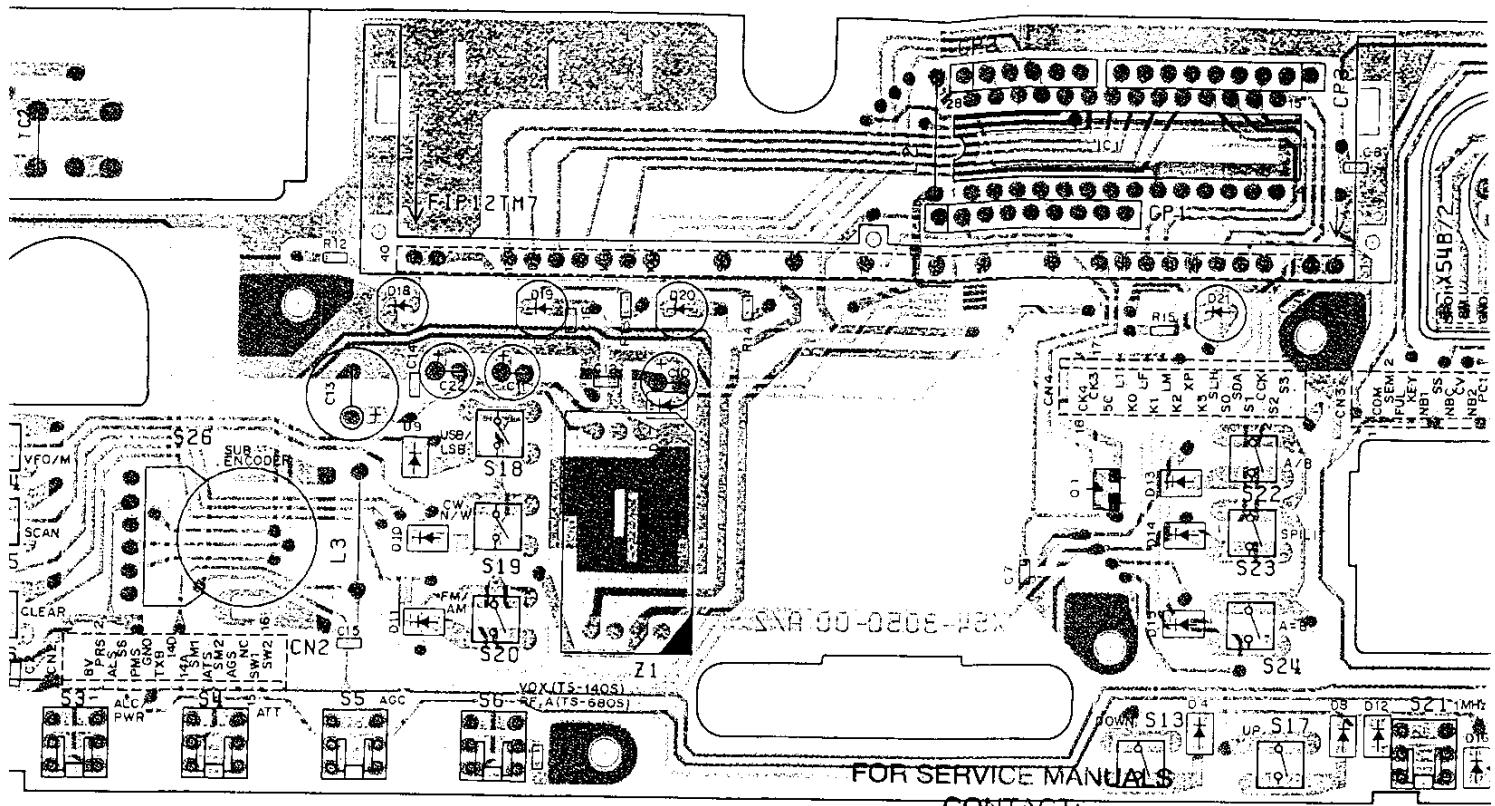

FOR SERVICE MANUALS

CONTACT:


MAURITRON TECHNICAL SERVICES



www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 352554

3050-XX) -00 : TS-140S(K, M, T), TS-680S -61 : TS-140S(W) Foil side view

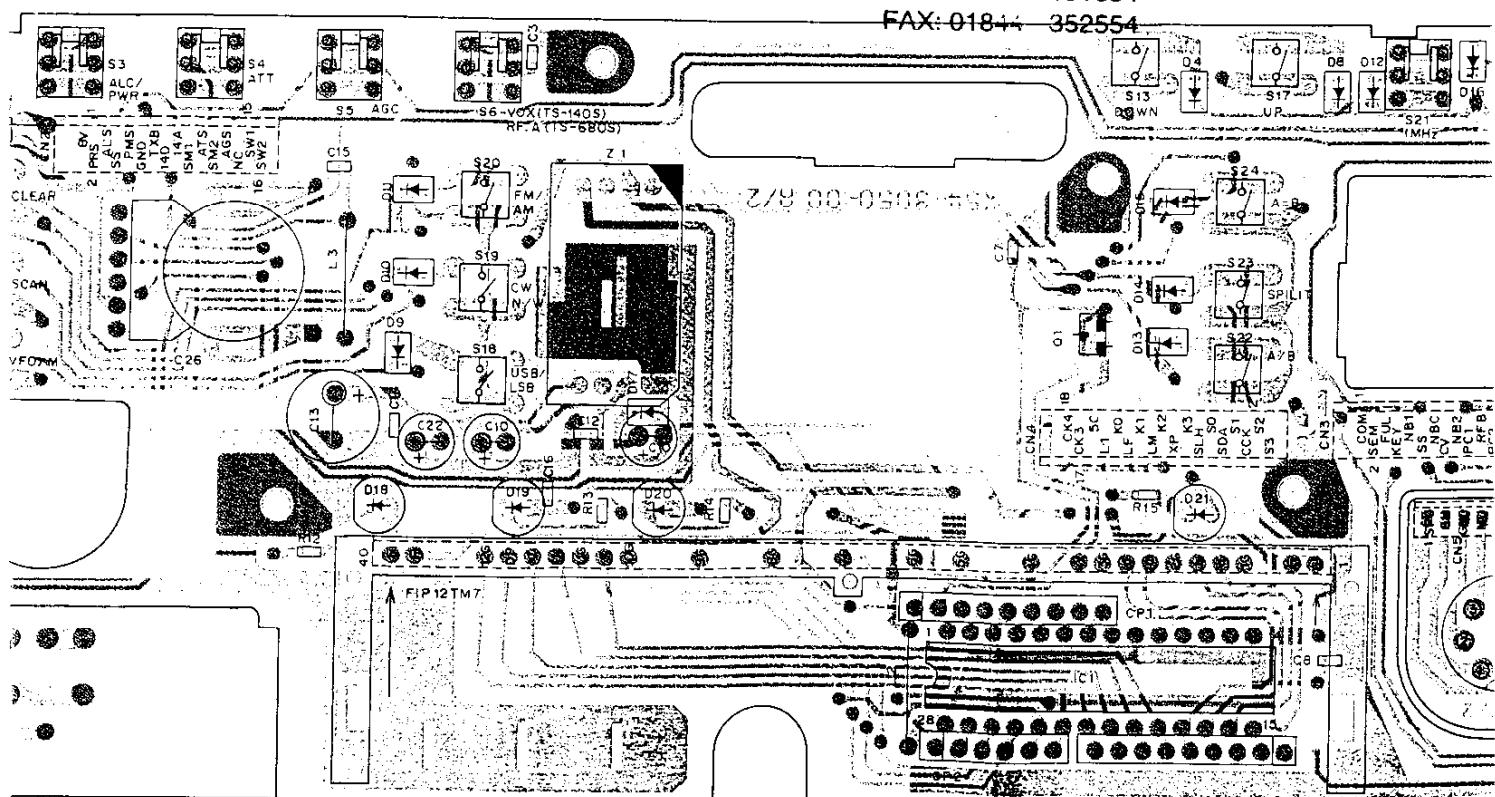


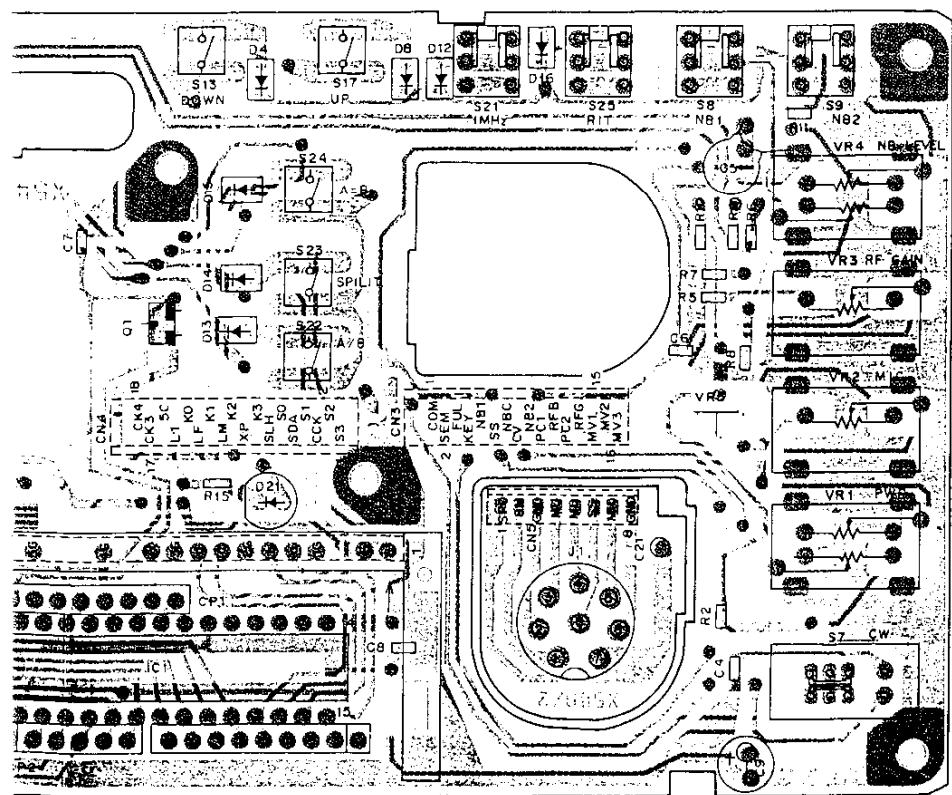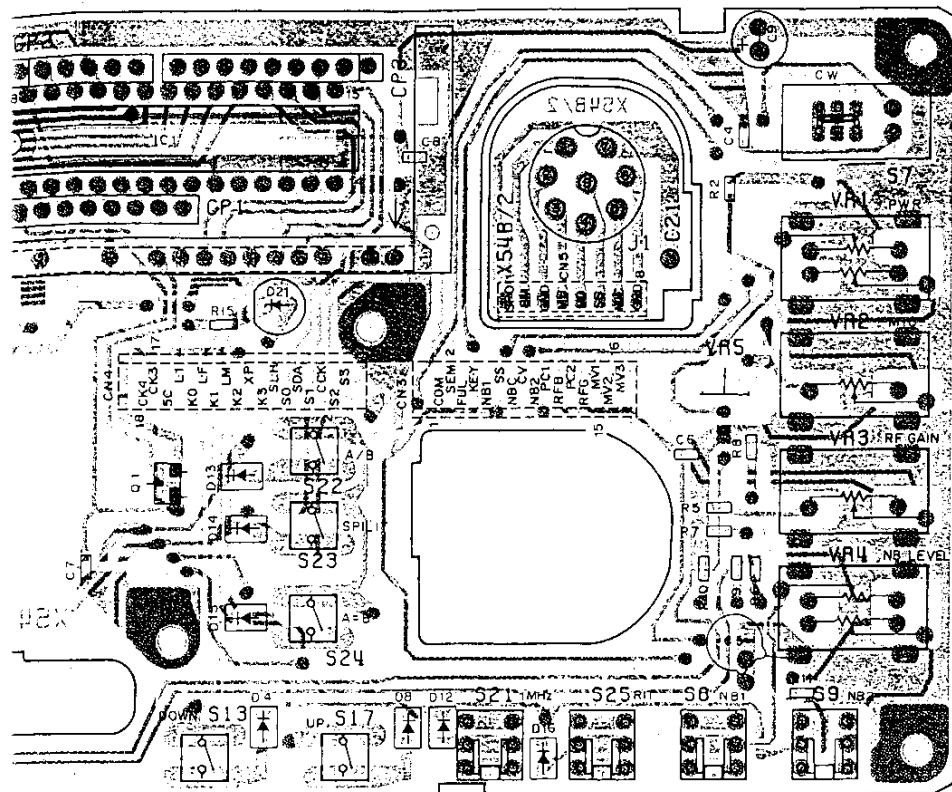


DTA114EK



μPD6300C



Signal line ——— Control line ————— Common DC line

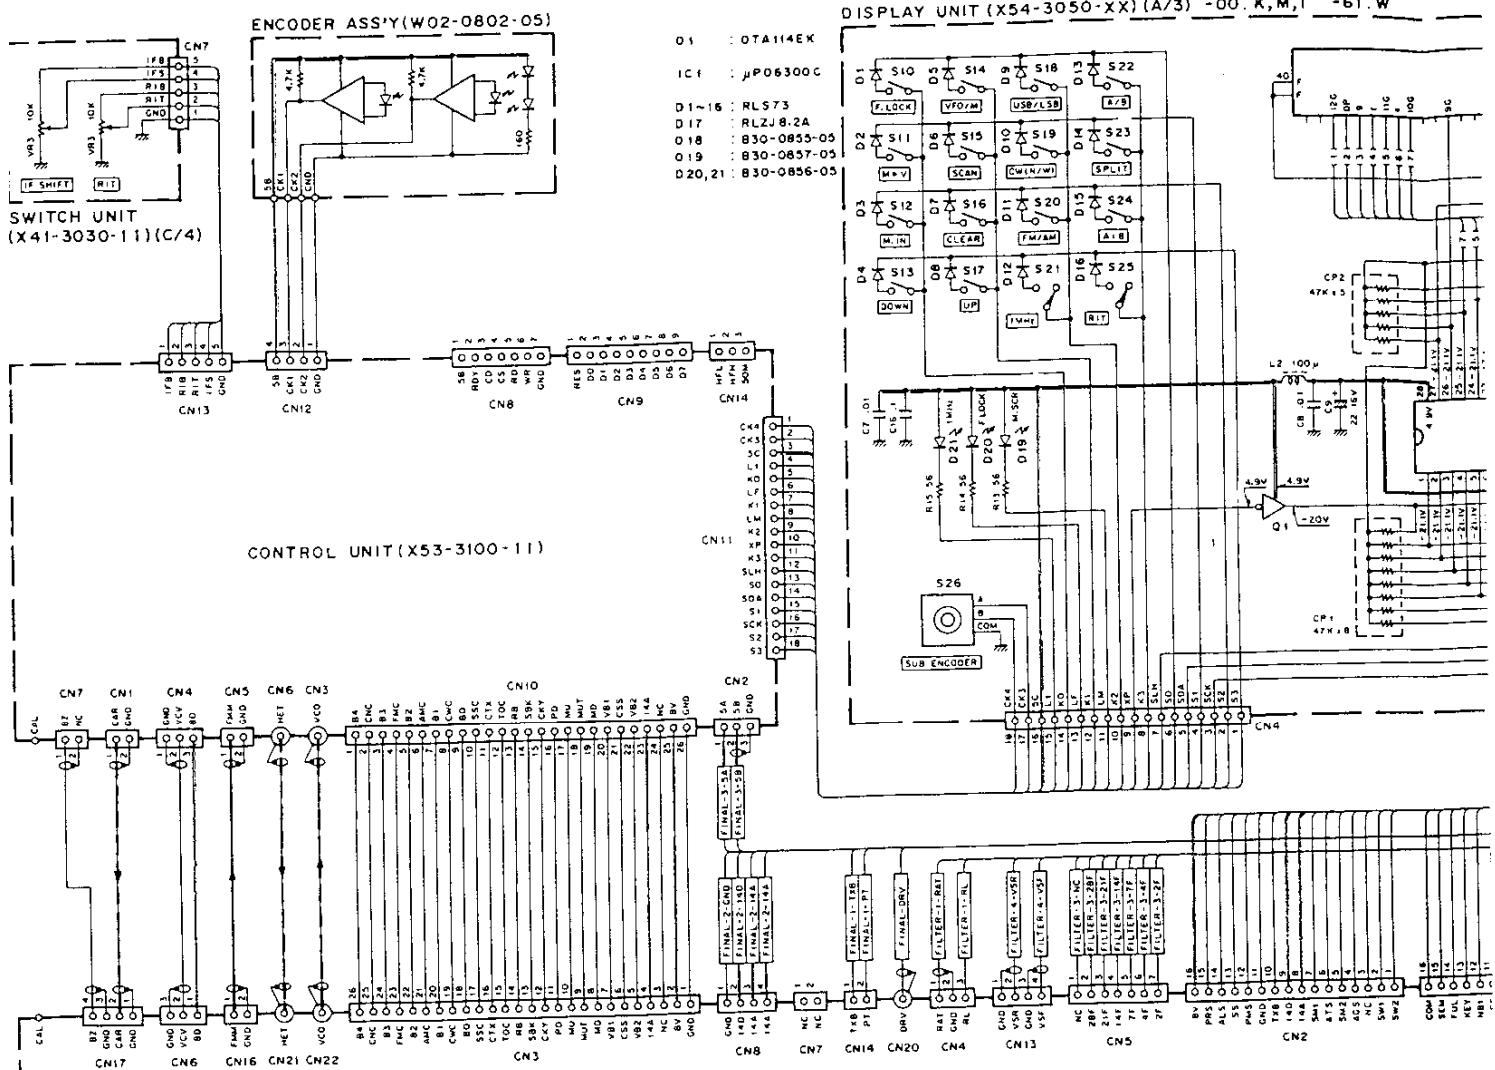

FOR SERVICE MANUALS

CONTACT:

MAURITRON TECHNICAL SERVICES


www.mauritron.co.uk

TEL: 01844 - 351694

FAX: 01844 - 352554


SIGNAL UNIT (X57-3200-XX) (A/2)

-10 : K,M,T - 61 : W

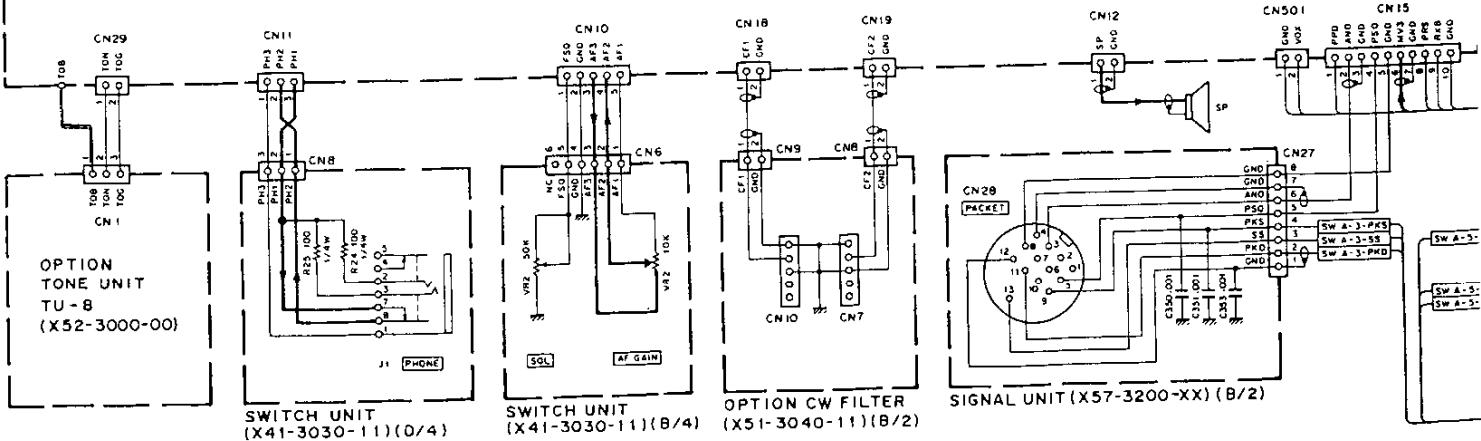


SCHEMATIC DIAGRAM (TS-1)

DC line

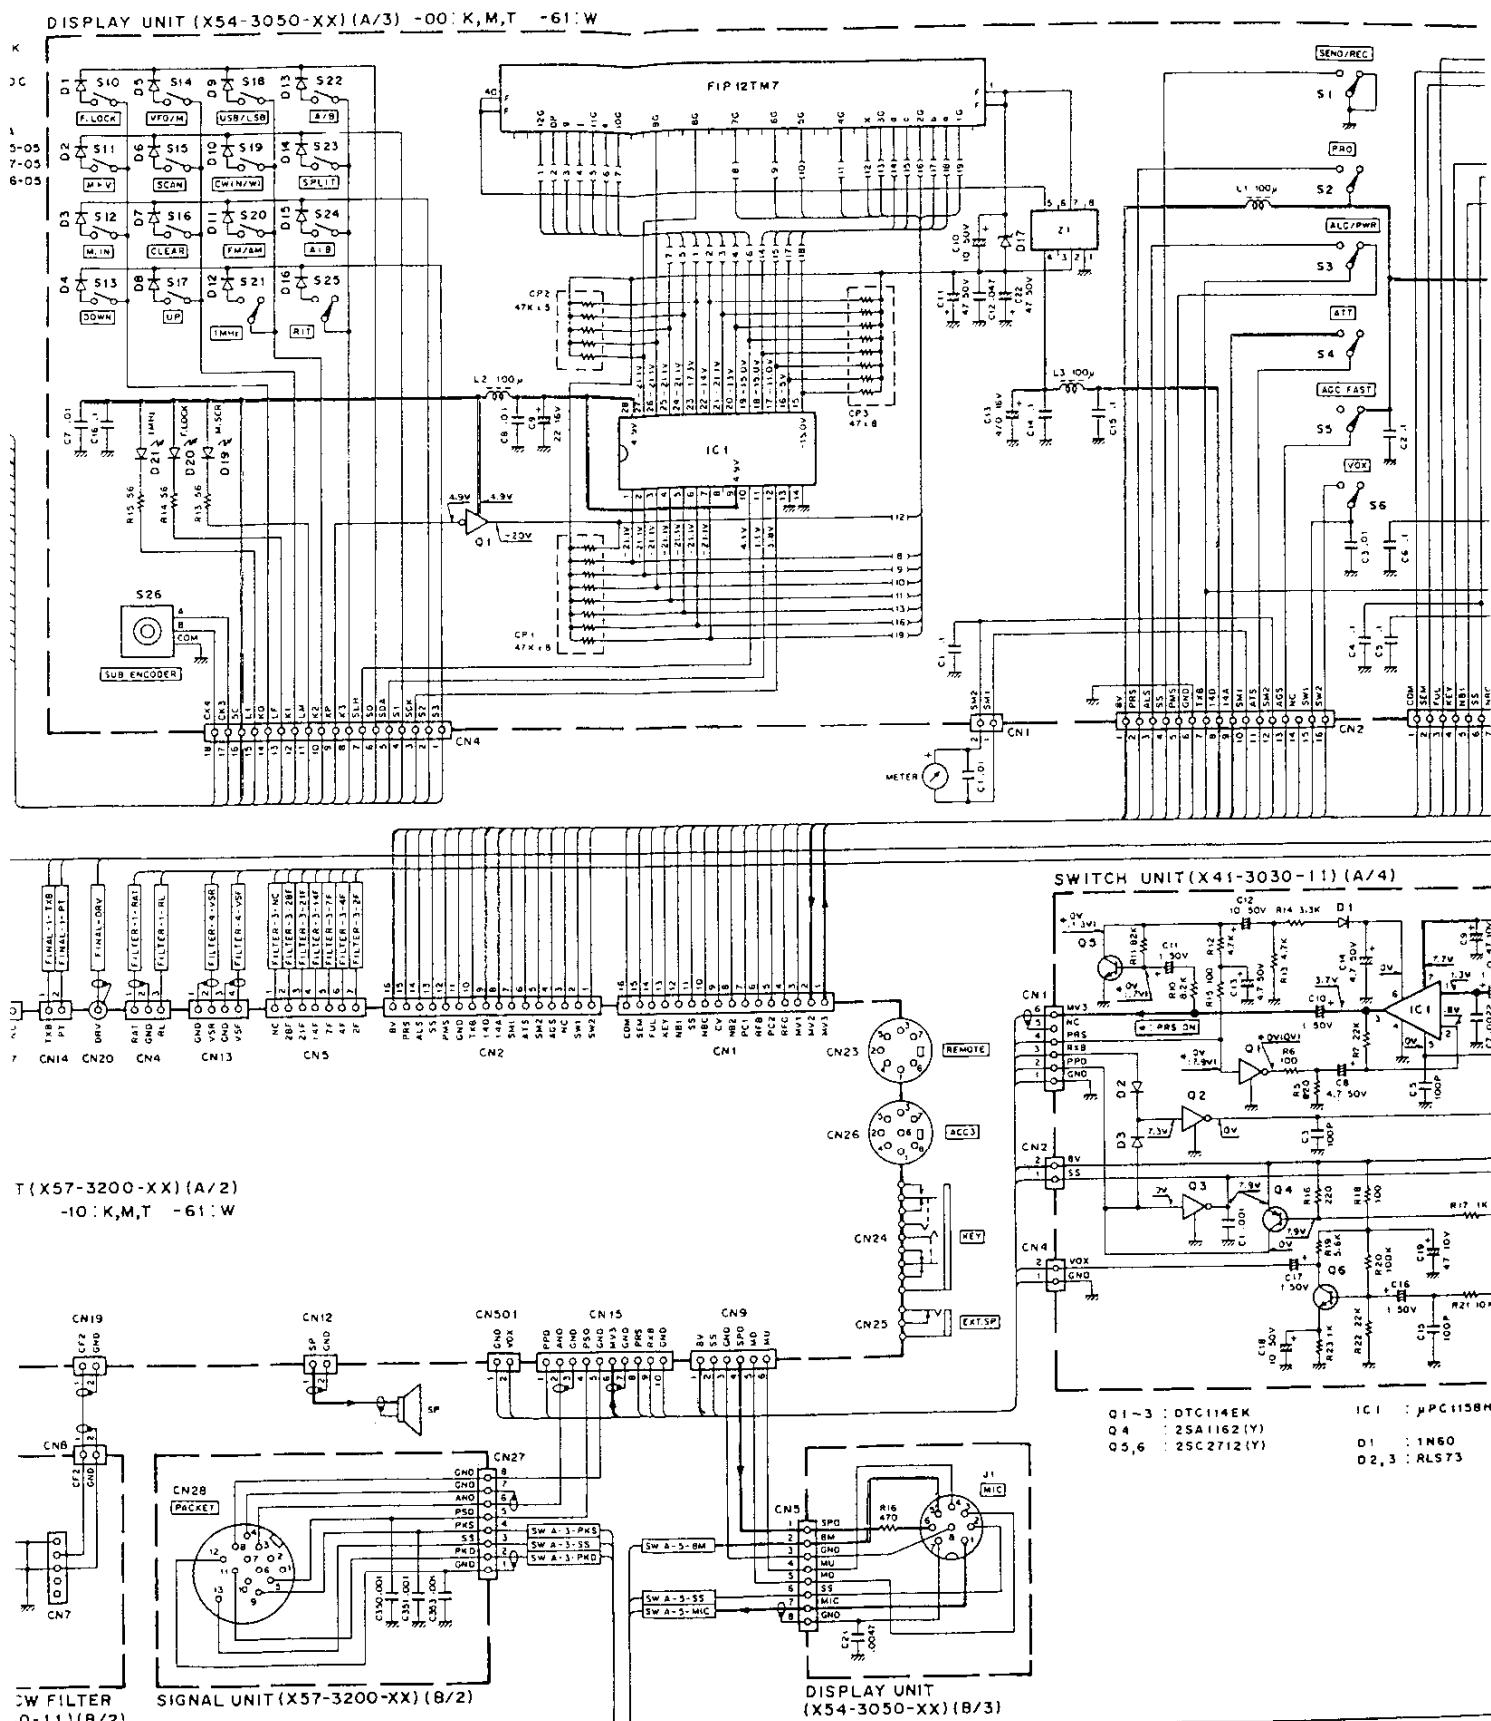


SCHEMATIC DIAGRAM (TS-140S)


Voltage measure

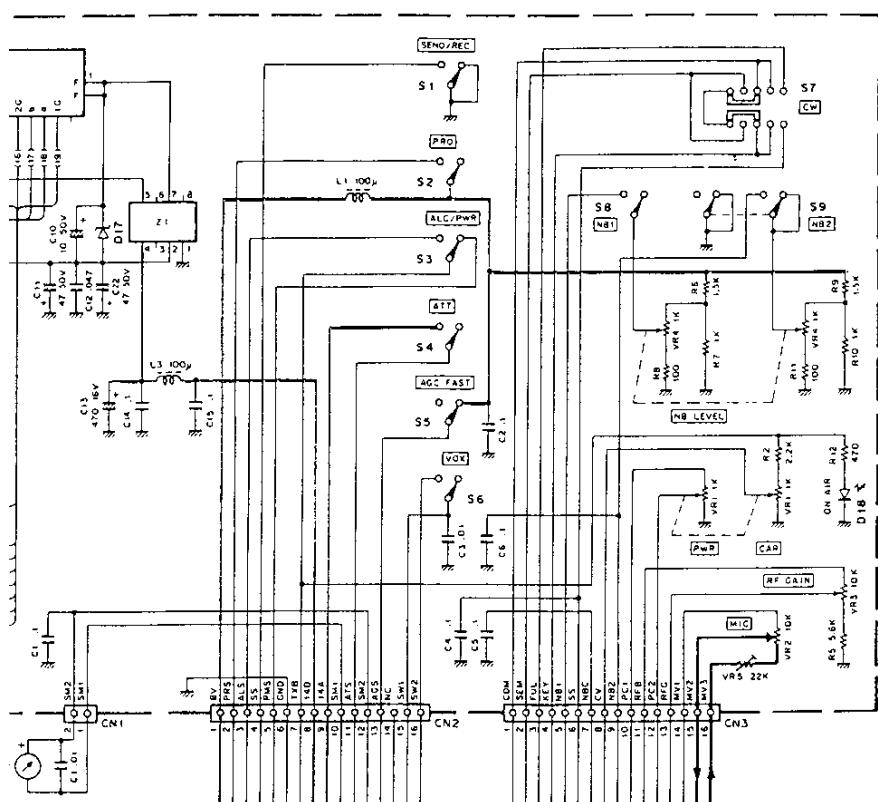

FILTER UNIT (X51-3040-1 t) (A/2)

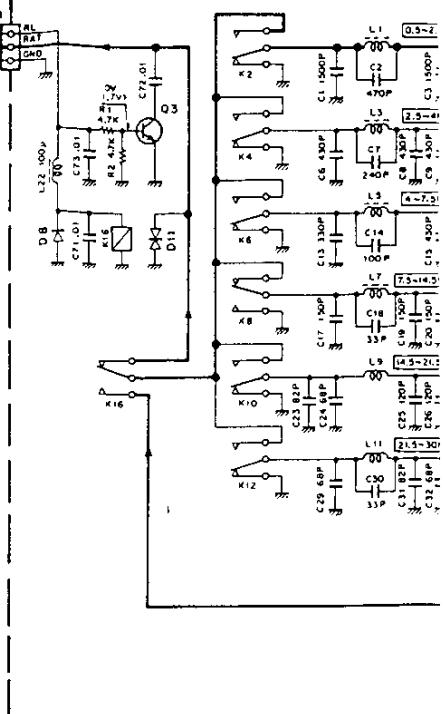

SWITCH UNIT (X41-3030-11) (A/4)

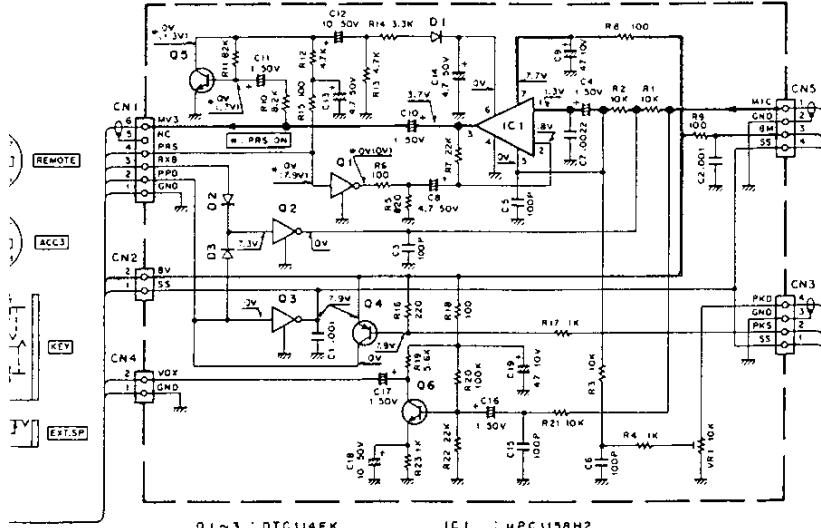

Q 1 ~ 3 : DTC114EK
 Q 4 : 2SA1162(Y)
 Q 5, 6 : 2SC2712(Y)


IC 1 : MPC1158H2

D 1 : IN60

D 2, 3 : RL973


**FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES**

www.mauritron.co.uk
 TEL: 01844 - 351694
 FAX: 01844 - 352554




X (B/3)



100W FINAL UNIT (X45-3100-11)

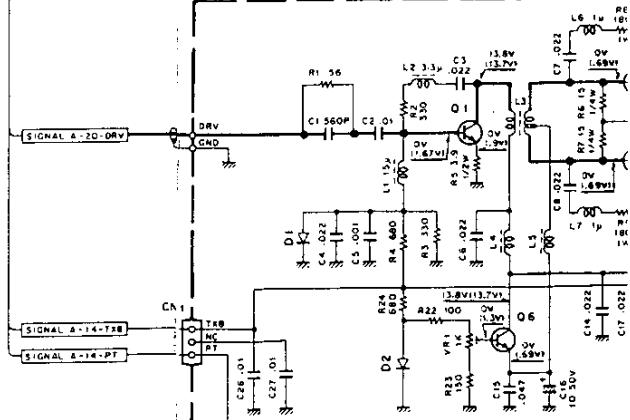

FAN (X59-3370-00)

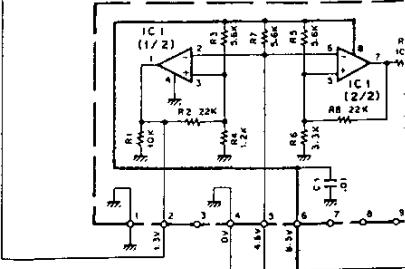

Voltage measurement condition $f = 14\text{MHz}$. SSB MIC GAIN MIN.
Mode : USB. () : TX.

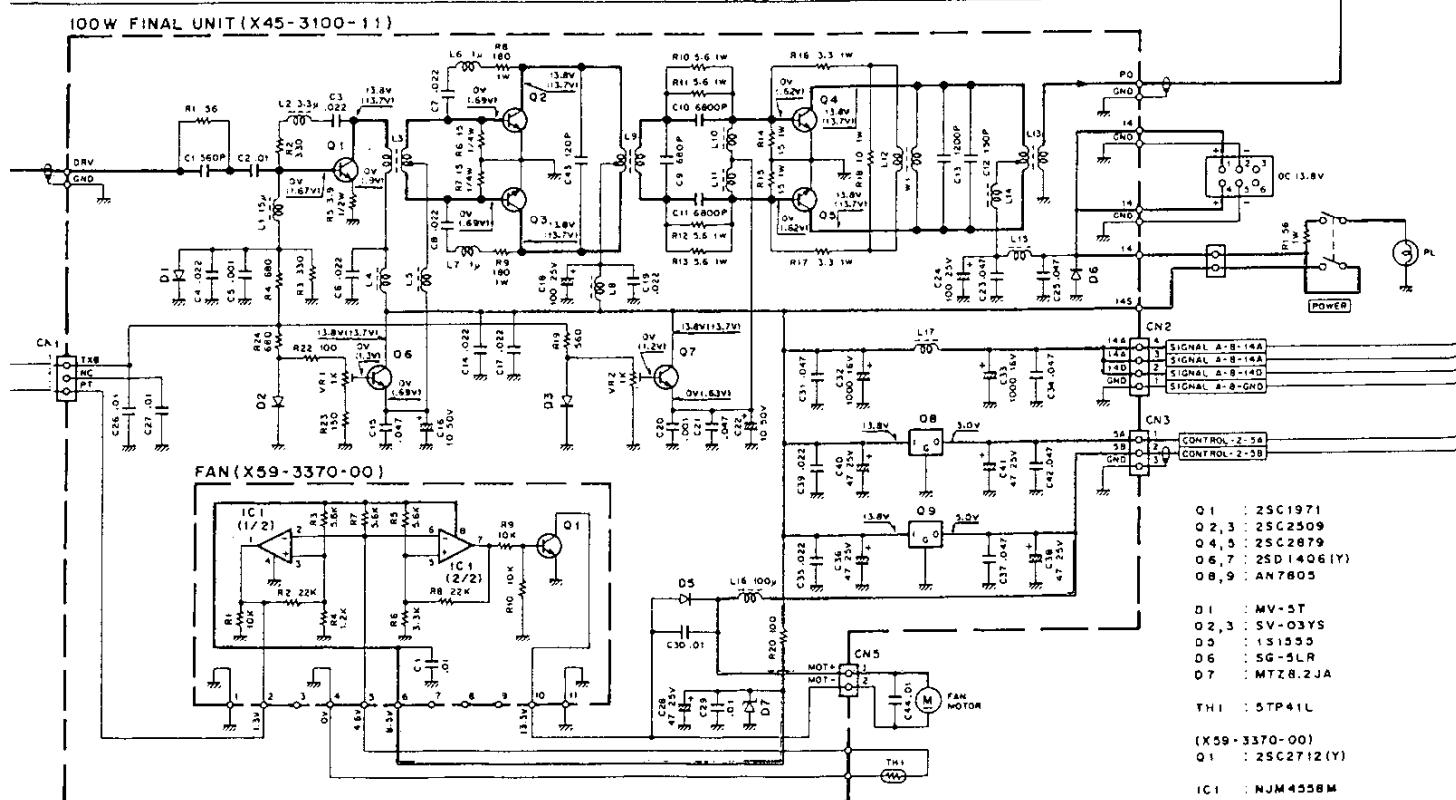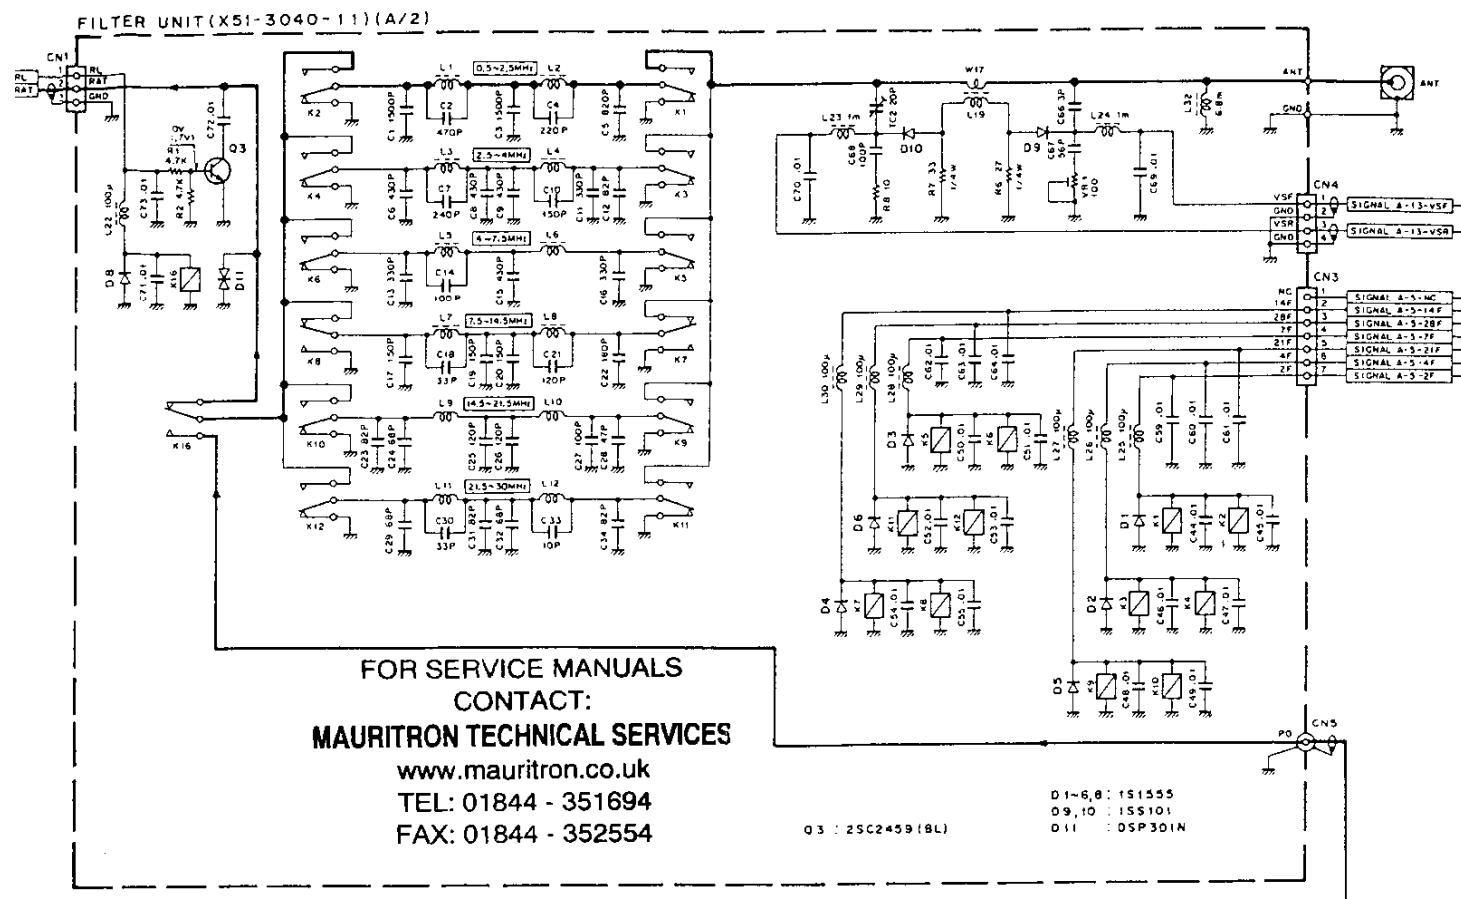


TS-140S/680S

Signal line



Control line

Common DC line

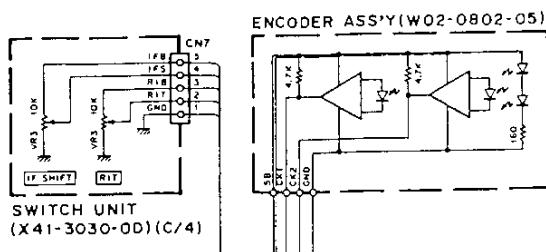

DISPLAY UNIT (X54-3050-00) (A/3)

Q1: QTA114EK
IC1: μPD6300C
D1~16: RLS73
D17: RLZ8.2A
D18: B30-0855-05
D19: B30-0857-05
D20,21: B30-0856-05

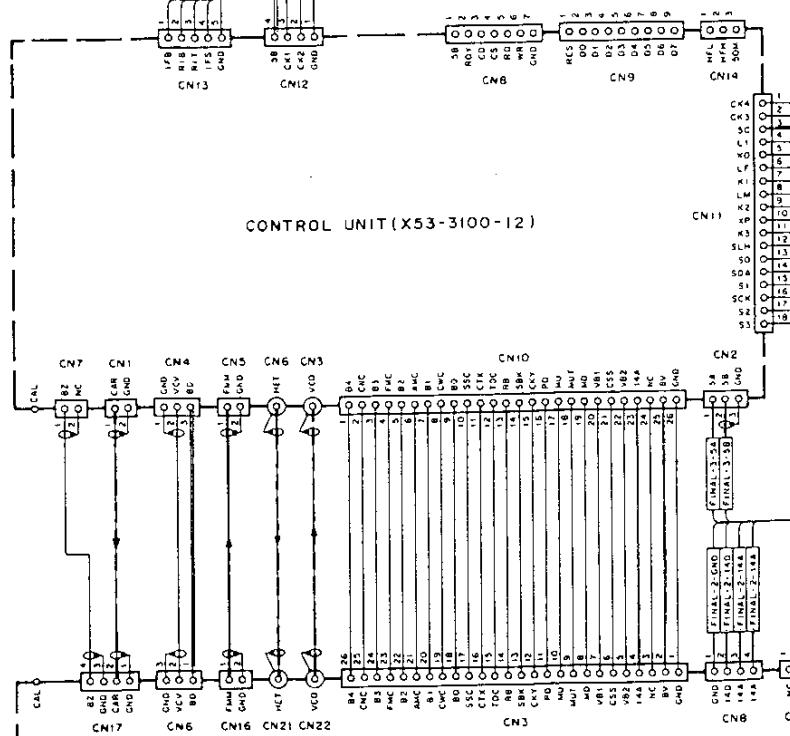

CN11

CN2

CN3

CN4

CN5

CN6

CN7

CN8

CN9

CN10

CN11

CN12

CN13

CN14

CN15

CN16

CN17

CN18

CN19

CN20

CN21

CN22

CN23

CN24

CN25

CN26

CN27

CN28

CN29

CN30

CN31

CN32

CN33

CN34

CN35

CN36

CN37

CN38

CN39

CN40

CN41

CN42

CN43

CN44

CN45

CN46

CN47

CN48

CN49

CN50

CN51

CN52

CN53

CN54

CN55

CN56

CN57

CN58

CN59

CN60

CN61

CN62

CN63

CN64

CN65

CN66

CN67

CN68

CN69

CN70

CN71

CN72

CN73

CN74

CN75

CN76

CN77

CN78

CN79

CN80

CN81

CN82

CN83

CN84

CN85

CN86

CN87

CN88

CN89

CN90

CN91

CN92

CN93

CN94

CN95

CN96

CN97

CN98

CN99

CN100

CN101

CN102

CN103

CN104

CN105

CN106

CN107

CN108

CN109

CN110

CN111

CN112

CN113

CN114

CN115

CN116

CN117

CN118

CN119

CN120

CN121

CN122

CN123

CN124

CN125

CN126

CN127

CN128

CN129

CN130

CN131

CN132

CN133

CN134

CN135

CN136

CN137

CN138

CN139

CN140

CN141

CN142

CN143

CN144

CN145

CN146

CN147

CN148

CN149

CN150

CN151

CN152

CN153

CN154

CN155

CN156

CN157

CN158

CN159

CN160

CN161

CN162

CN163

CN164

CN165

CN166

CN167

CN168

CN169

CN170

CN171

CN172

CN173

CN174

CN175

CN176

CN177

CN178

CN179

CN180

CN181

CN182

CN183

CN184

CN185

CN186

CN187

CN188

CN189

CN190

CN191

CN192

CN193

CN194

CN195

CN196

CN197

CN198

CN199

CN200

CN201

CN202

CN203

CN204

CN205

CN206

CN207

CN208

CN209

CN210

CN211

CN212

CN213

CN214

CN215

CN216

CN217

CN218

CN219

CN220

CN221

CN222

CN223

CN224

CN225

CN226

CN227

CN228

CN229

CN230

CN231

CN232

CN233

CN234

CN235

CN236

CN237

CN238

CN239

CN240

CN241

CN242

CN243

CN244

CN245

CN246

CN247

CN248

CN249

CN250

CN251

CN252

CN253

CN254

CN255

CN256

CN257

CN258

CN259

CN260

CN261

CN262

CN263

CN264

CN265

CN266

CN267

CN268

CN269

CN270

CN271

CN272

CN273

CN274

CN275

CN276

CN277

CN278

CN279

CN280

CN281

CN282

CN283

CN284

CN285

CN286

CN287

CN288

CN289

CN290

CN291

CN292

CN293

CN294

CN295

CN296

CN297

CN298

CN299

CN300

CN301

CN302

CN303

CN304


CN305

CN306

CN307






SCHEMATIC DIAG

— Signal line - - - Control line - - - Common DC line

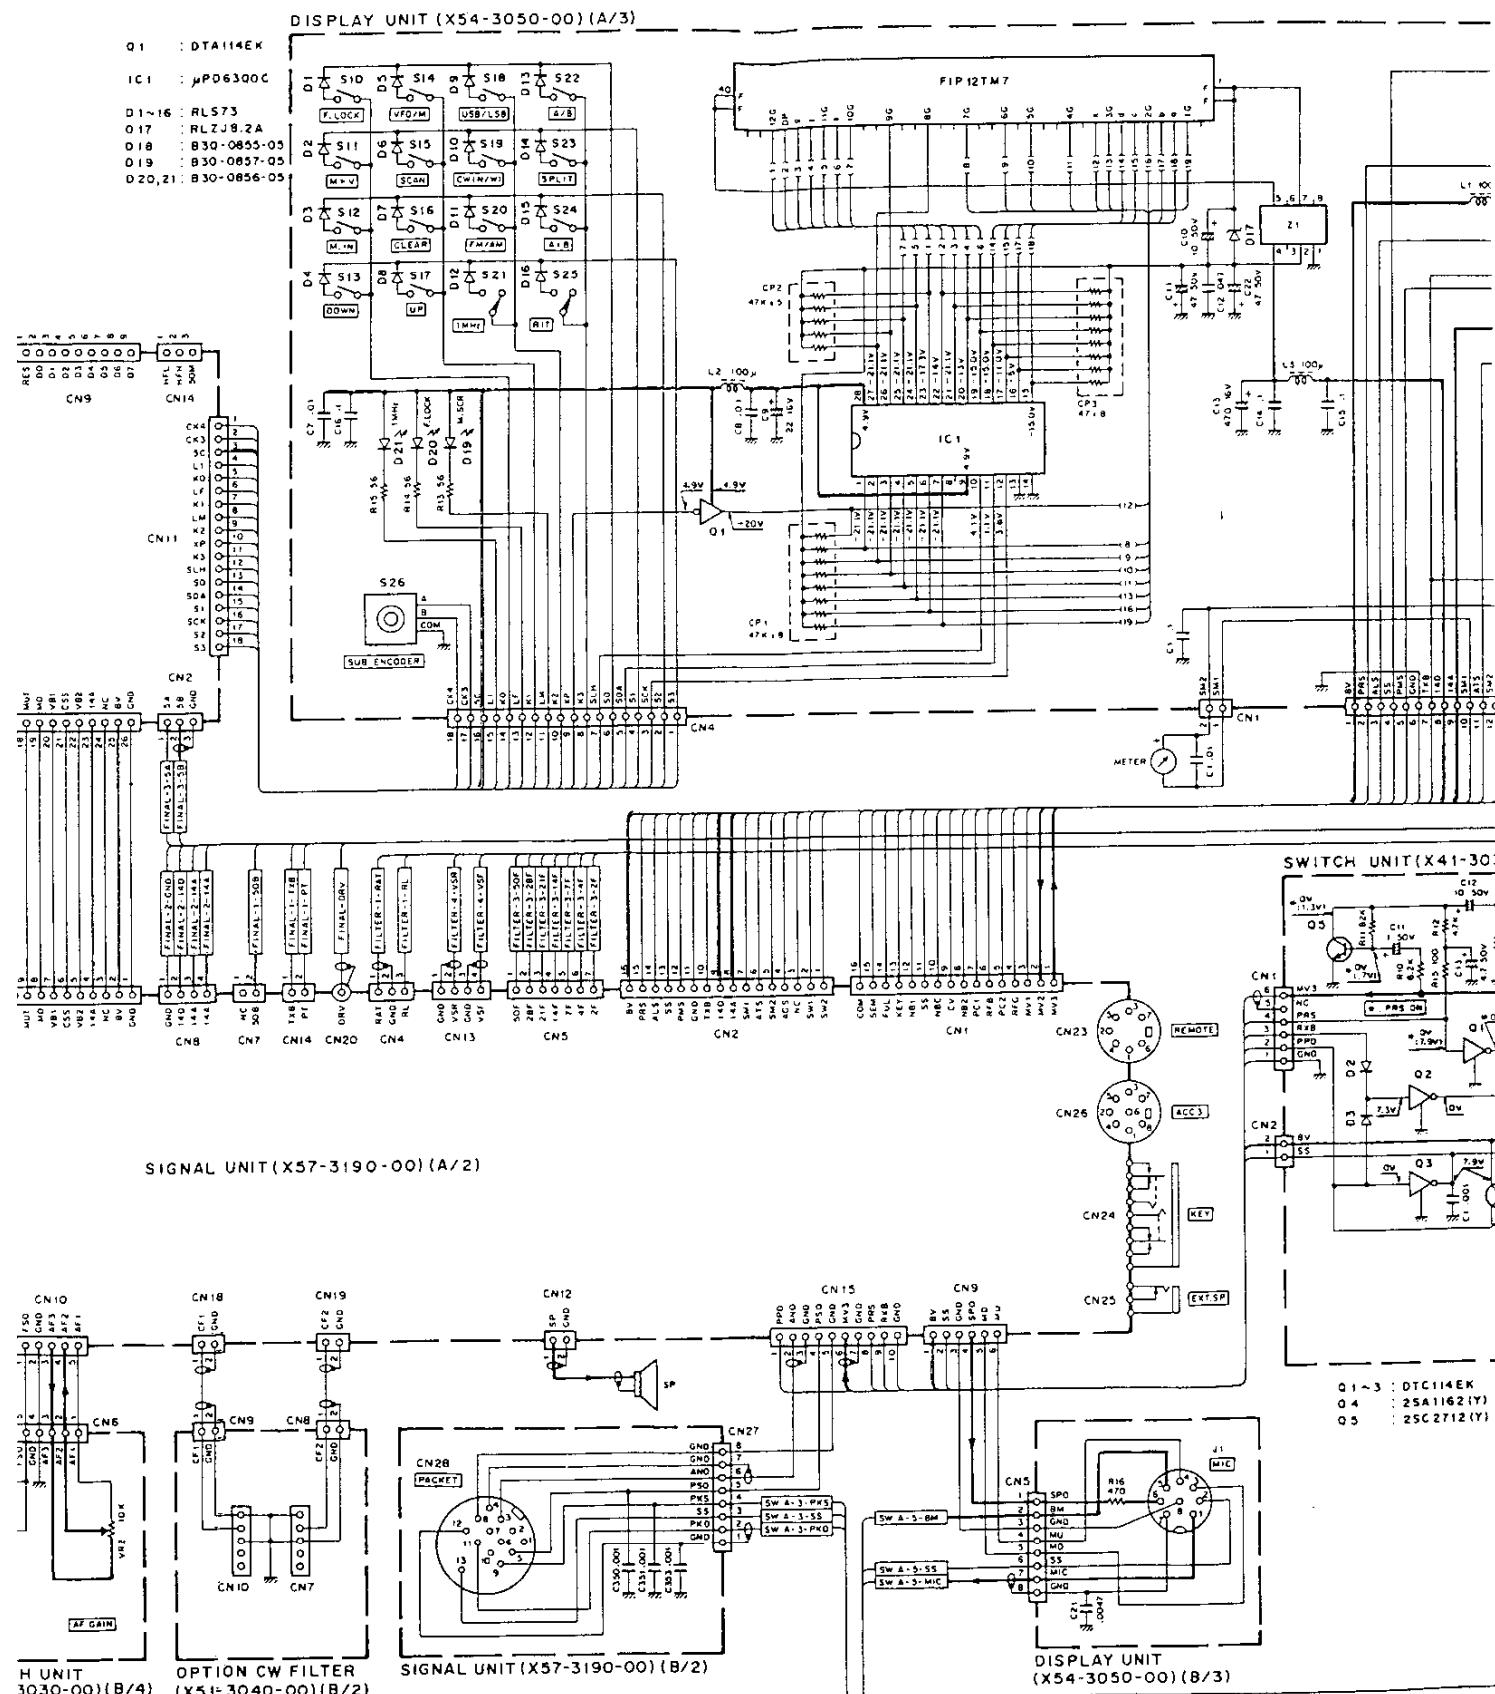


SCHEMATIC DIAGRAM (TS-680S)


Volts

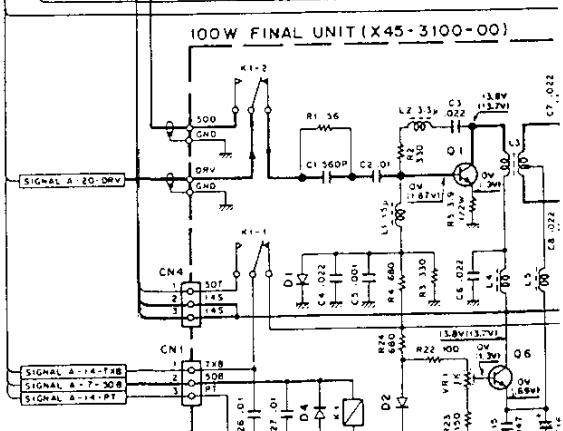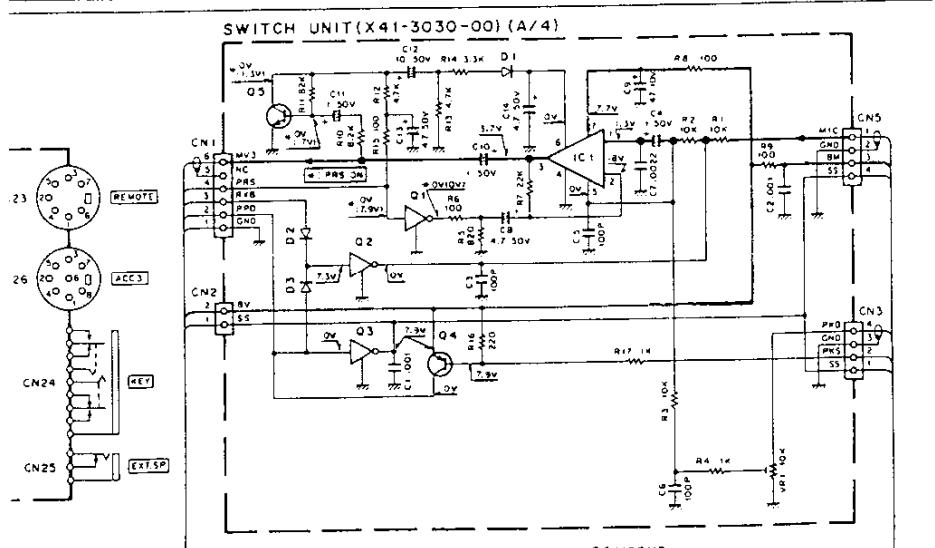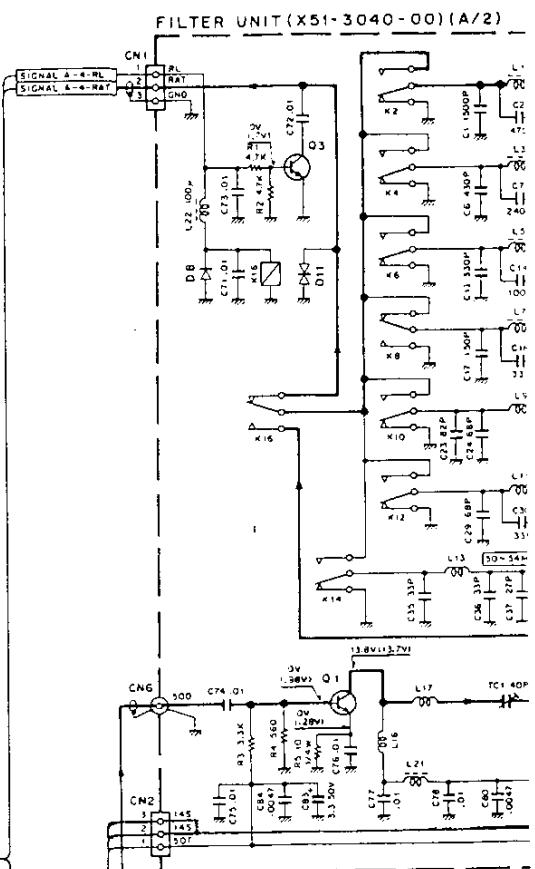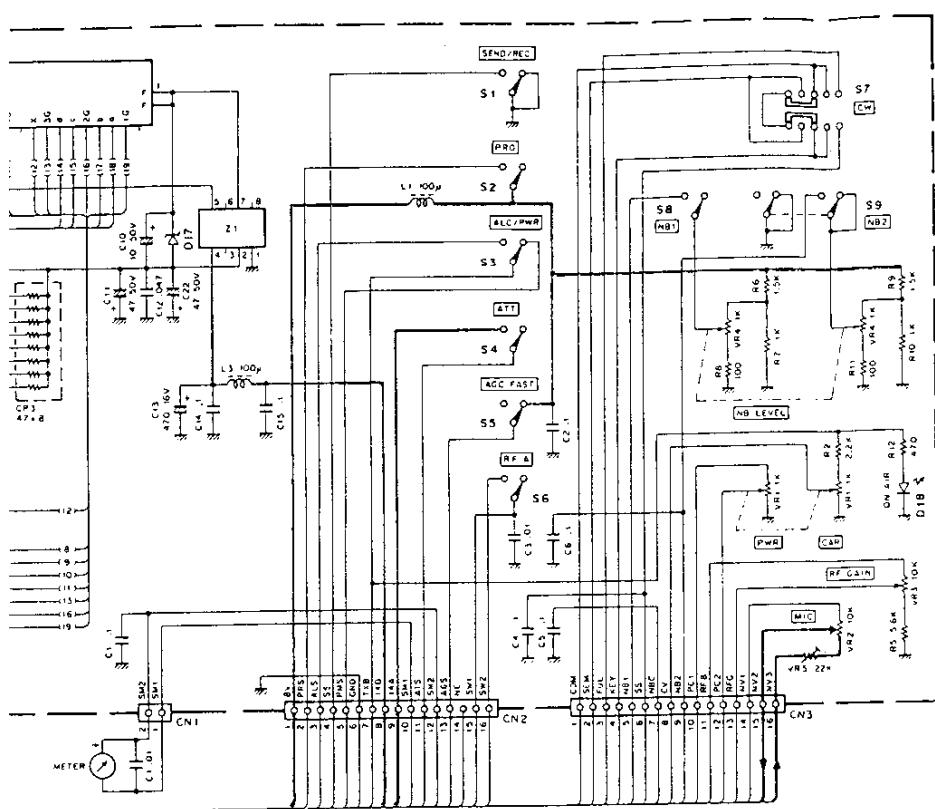


**FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES**
www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

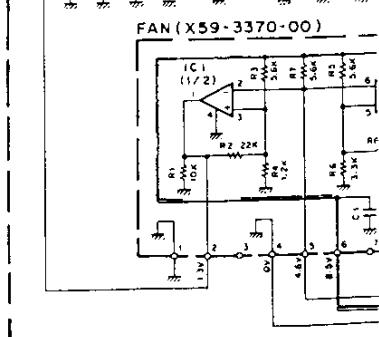


Voltage measurement condition FILTER UNIT : f=52MHz. FINAL UNIT : f=14MHz. SSB MIC GAIN.
 SWITCH UNIT, DISPLAY UNIT : f=14MHz, Mode : USB. () : TX.

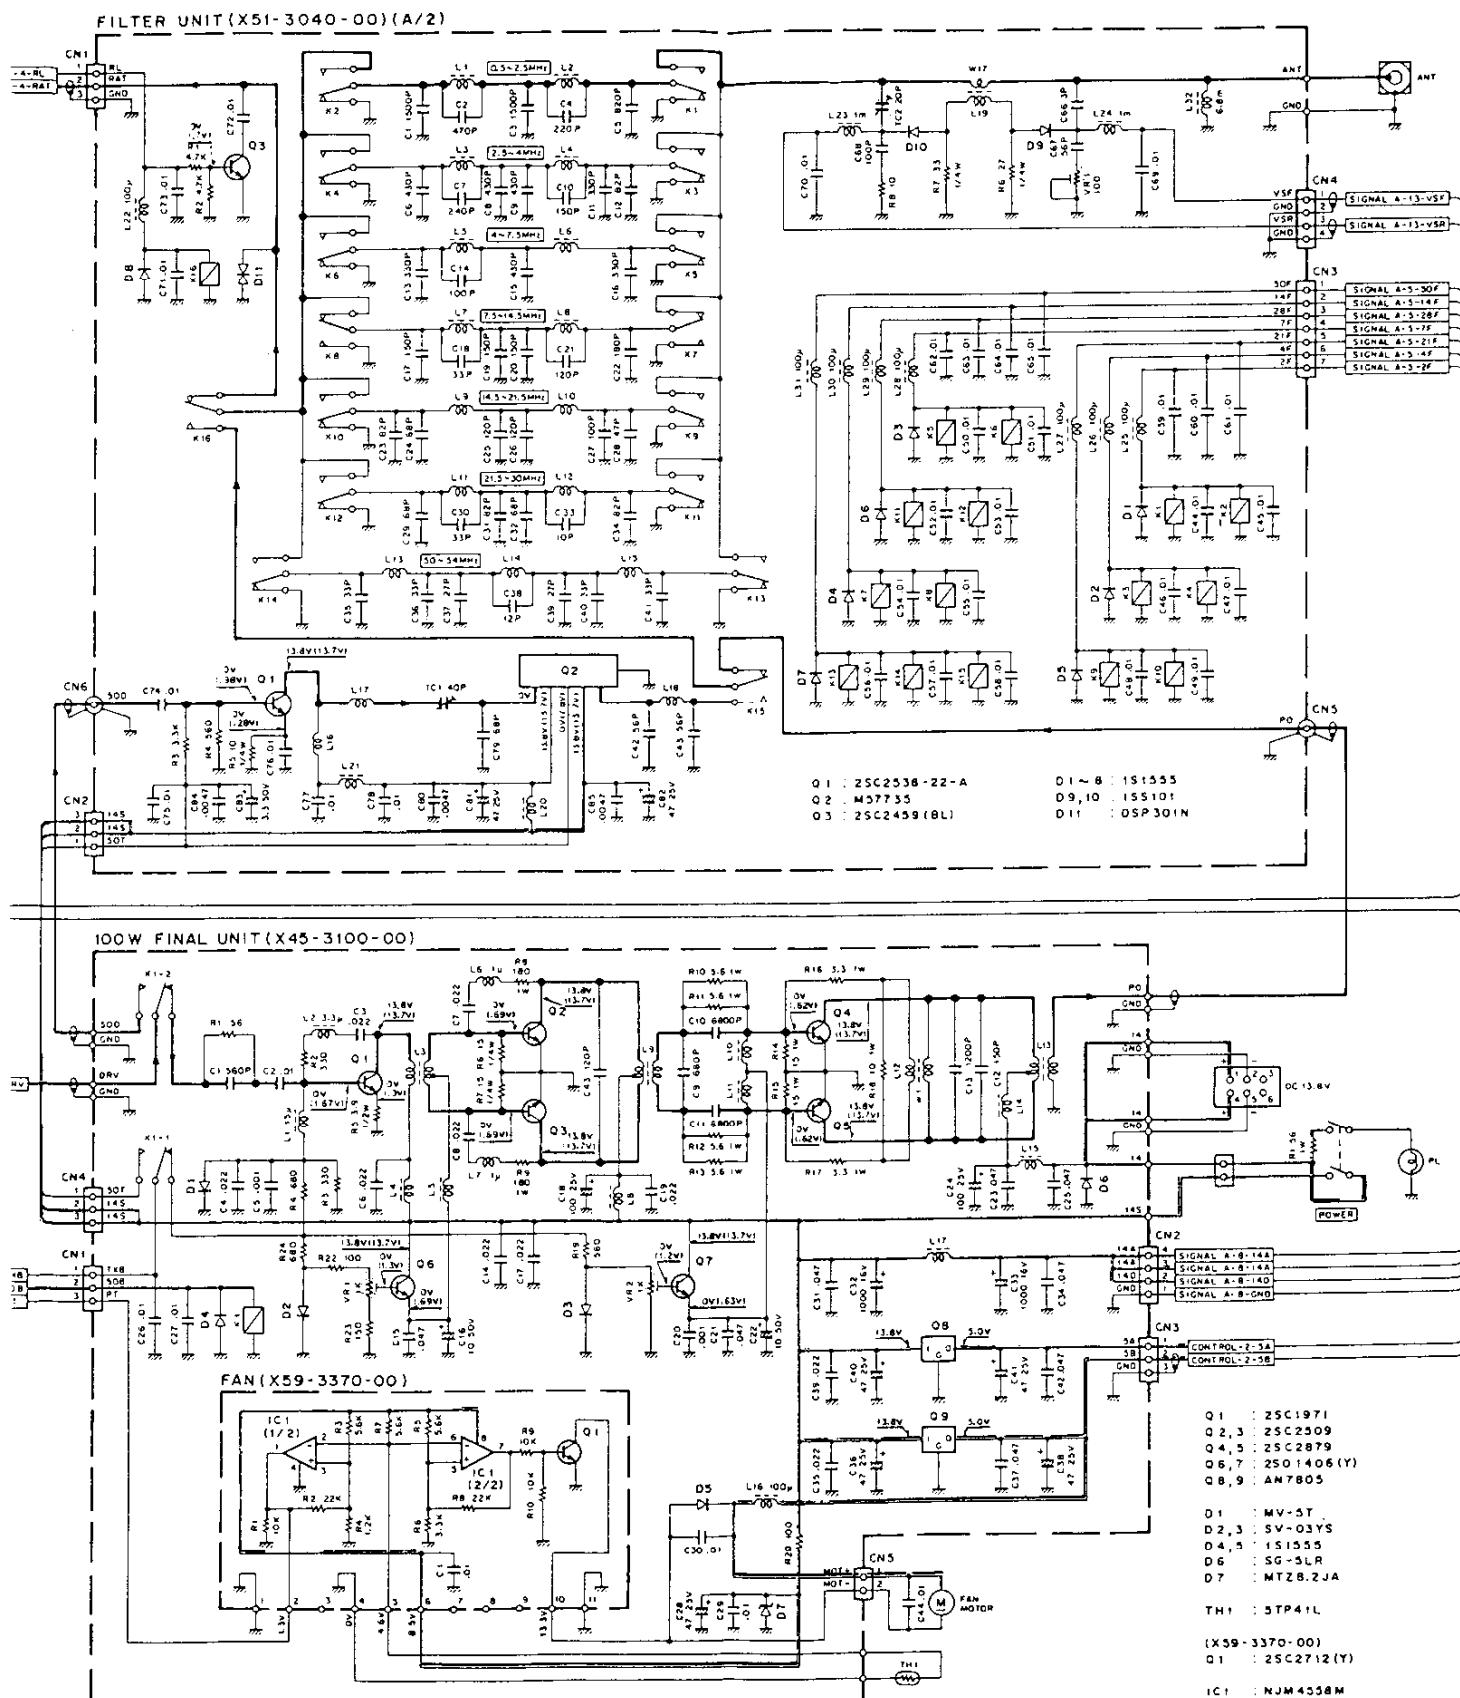

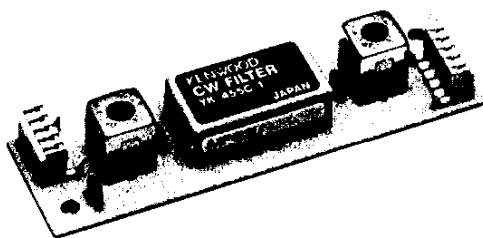TS-140S/680S**TK-455C-1 (CW FILTER)****YK-455C-1 EXTERNAL VIEW****YK-455C-1 ELECTRICAL CHARACTERISTICS**

Item	Rating
Nominal center frequency (f_0)	455kHz
Center frequency deviation	Within $f_0 \pm 0.1\text{kHz}$ at 6dB
6dB pass bandwidth	$f_0 \pm 0.25\text{kHz}$ or more
60dB attenuation bandwidth	$f_0 \pm 1.1\text{kHz}$ or less
Ripple	3dB or less at within $f_0 \pm 0.2\text{kHz}$
Insertion loss	8dB or less
Spurious attenuation	70dB or more at within $f_0 \pm 60\text{kHz}$
I/O terminating impedance	$2\text{k}\Omega \pm 5\%$

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
 TEL: 01844 - 351694
 FAX: 01844 - 352554

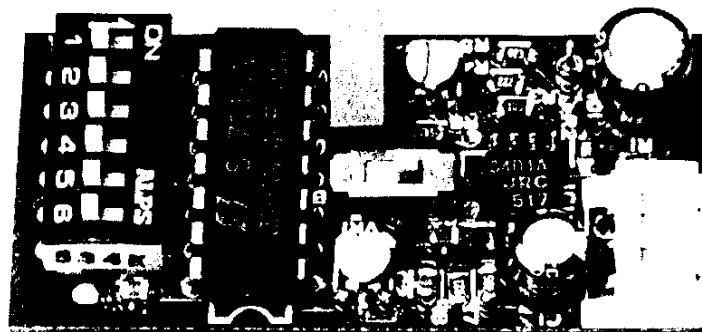TS-140S/680S**TU-8 (TONE UNIT)****TU-8 EXTERNAL VIEW****TU-8 SPECIFICATIONS**

Frequency range	38CH in 67.0—250.3Hz and 1750Hz, 1800Hz
Frequency Deviation	Within $\pm 0.5\%$
Max. Output Power	2.0Vrms $\pm 5\%$ at 1800Hz/1.5k Ω
Operating temperature	-20°C to +60°C
Power Supply Voltage	8V $\pm 5\%$
Semi-conductors	ICs : 2 Diode : 1
Weight	Approx. 10 grams
Dimensions	45 mm W 22 mm D 8 mm H (without cushion, etc.)

FOR SERVICE MANUALS
 CONTACT:
MAURITRON TECHNICAL SERVICES
www.mauritron.co.uk
 TEL: 01844 - 351694
 FAX: 01844 - 352554

TS-140S/680S

TU-8 (TONE UNIT)

TU-8 CIRCUIT DISCRIPTION

The TU-8 is a tone unit designed for the repeater operation of the TS-140S/680S.

● Outline

1. A six position DIP switch (Fig. 1) has been provided to allow selection of the desired tone frequency, 40 different frequencies are available (See Table 1.).
2. Use the DIP switch and Table 1 to select the desired tone frequency.

Freq. (Hz)	P1	P2	P3	P4	P5	P6	Freq. (Hz)	P1	P2	P3	P4	P5	P6
67.0	1	0	0	0	0	0	136.5	1	0	1	0	1	0
71.9	0	1	0	0	0	0	141.3	0	1	1	0	1	0
74.4	1	1	0	0	0	0	146.2	1	1	1	0	1	0
77.0	0	0	1	0	0	0	151.4	0	0	0	1	1	0
79.7	1	0	1	0	0	0	156.7	1	0	0	1	1	0
82.5	0	1	1	0	0	0	162.2	0	1	0	1	1	0
85.4	1	1	1	0	0	0	167.9	1	1	0	1	1	0
88.5	0	0	0	1	0	0	173.8	0	0	1	1	1	0
91.5	1	0	0	1	0	0	179.9	1	0	1	1	1	0
94.8	0	1	0	1	0	0	186.2	0	1	1	1	1	0
97.4	1	1	0	1	0	0	192.8	1	1	1	1	1	0
100.0	0	0	1	1	0	0	203.5	0	0	0	0	0	1
103.5	1	0	1	1	0	0	210.7	1	0	0	0	0	1
107.2	0	1	1	1	0	0	218.1	0	1	0	0	0	1
110.9	1	1	1	1	0	0	225.7	1	1	0	0	0	1
114.8	0	0	0	0	1	0	233.6	0	0	1	0	0	1
118.8	1	0	0	0	1	0	241.8	1	0	1	0	0	1
123.0	0	1	0	0	1	0	250.3	0	1	1	0	0	1
127.3	1	1	0	0	1	0	1750.0	1	1	1	1	0	1
131.8	0	0	1	0	1	0	1800.0	0	0	0	0	1	1

(1 : ON 0 : OFF)

Table 1 Program

Ex.) 88.5Hz switch position

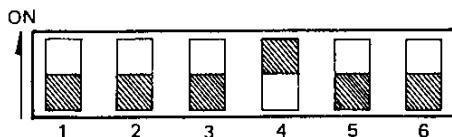


Fig. 1 DIP Switch

FOR SERVICE MANUALS
CONTACT:
MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk
TEL: 01844 - 351694
FAX: 01844 - 352554

TU-8 ADJUSTMENT

● Deviation adjustment

The TU-8 has been preset at factory for $\pm 600\text{Hz}$. The deviation is adjusted by with VR1 to Max. $\pm 2\text{kHz}$ with the deviation potentiometer full clockwise when the TU-8 is installed on the TS-140S/680S.

*1 *2

2. Tone-burst or continuous-tone selection :
A switch is provided to allow selection of either the tone-burst or continuous tone mode.
The burst duration can be adjusted by with VR2.

*1 Tone-burst mode :

A tone will be generated for a brief period at the beginning of each transmission.

*2 Continuous-tone mode :

A tone will be generated as long as the PTT switch is depressed. Since the tone is adjusted for a sub-audible level, this should not interfere with normal communications.

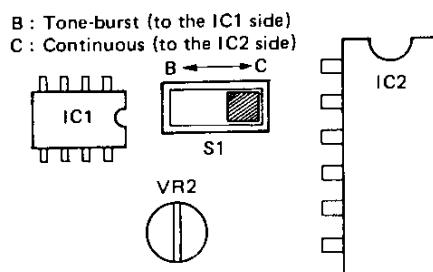


Fig. 2 Tone-burst or continuous-tone selection switch

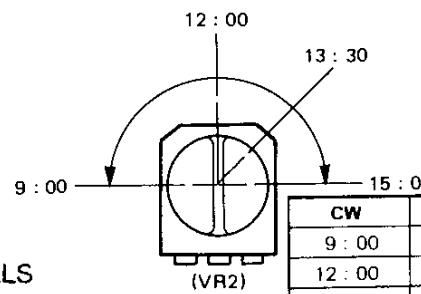


Table 2

Fig. 3 Burst time adjustment

TS-140S/680S**TU-8 (TONE UNIT)**

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TU-8 PARTS LIST

Ref. No. 参考番号	Address 位 置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規 格	Desti- nation 仕 向	Re- marks 備考
TU-8						
-		*	X52-3000-00	TONE UNIT		
TONE UNIT (X52-3000-00)						
C1			CEO4CW1A220M	ELECTRO 22UF	10WV	
C2	-4		CK73FB1E103K	CHIP C 0.010UF	K	
C5			CEO4CW1A470M	ELECTRO 47UF	10WV	
C6			CC45SL1H102J	CERAMIC 1000PF	J	
L1			L40-2211-17	SMALL FIXED INDUCTOR		
X1			L78-0018-05	CERAMIC OSCILLATOR (3.58MHZ)		
R1	12		RK73FB2A105J	CHIP R 1.0M	J 1/10W	
R3			RK73FB2A103J	CHIP R 10K	J 1/10W	
R4			RK73FB2A222J	CHIP R 2.2K	J 1/10W	
R5			RK73FB2A473J	CHIP R 47K	J 1/10W	
R6			RK73FB2A682J	CHIP R 6.8K	J 1/10W	
R7			RK73FB2A105J	CHIP R 1.0M	J 1/10W	
R8			RK73FB2A823J	CHIP R 82K	J 1/10W	
VR1	,2	*	R12-4418-05	TRIMMING POT (50K)		
S1		*	S31-1411-05	SLIDE SWITCH (3P)		
S2		*	S59-6401-05	DIP SWITCH (SSGM16 6P)		
D1			1SS133	DIODE		
IC1		*	NJM3404AM	IC(NP AMP X2)		
IC2			S7116A	IC(TONE ENCODER)		

FOR SERVICE MANUALS
 CONTACT:
MAURITRON TECHNICAL SERVICES

www.mauritron.co.uk

TEL: 01844 - 351694



FAX: 01844 - 352554

TS-140S/680S

TU-8 (TONE UNIT)


TU-8 PC BOARD VIEW


TONE UNIT (X52-3000-00) Component side view

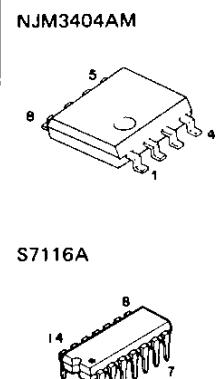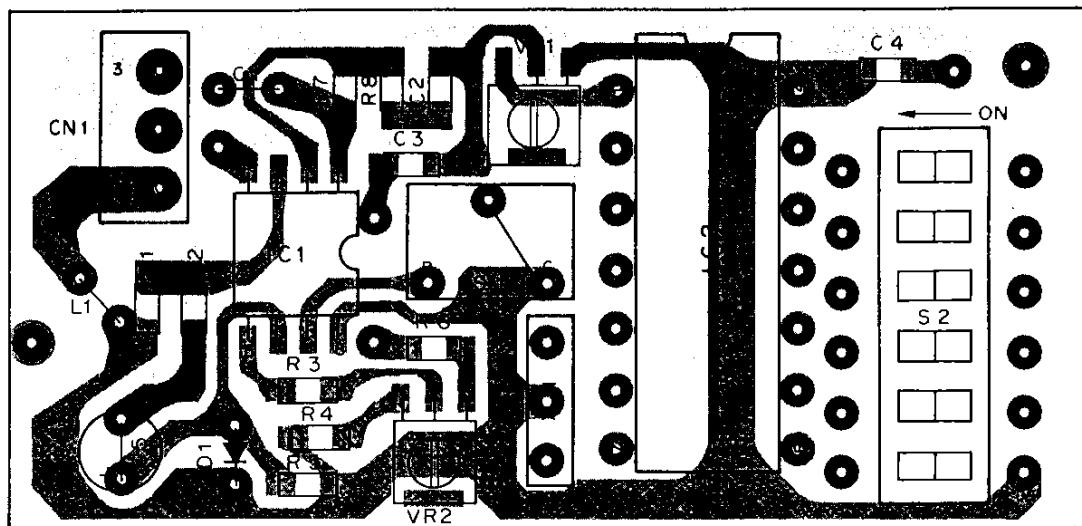

TU-8 SCHEMATIC DIAGRAM

TONE UNIT (X52-3000-00)

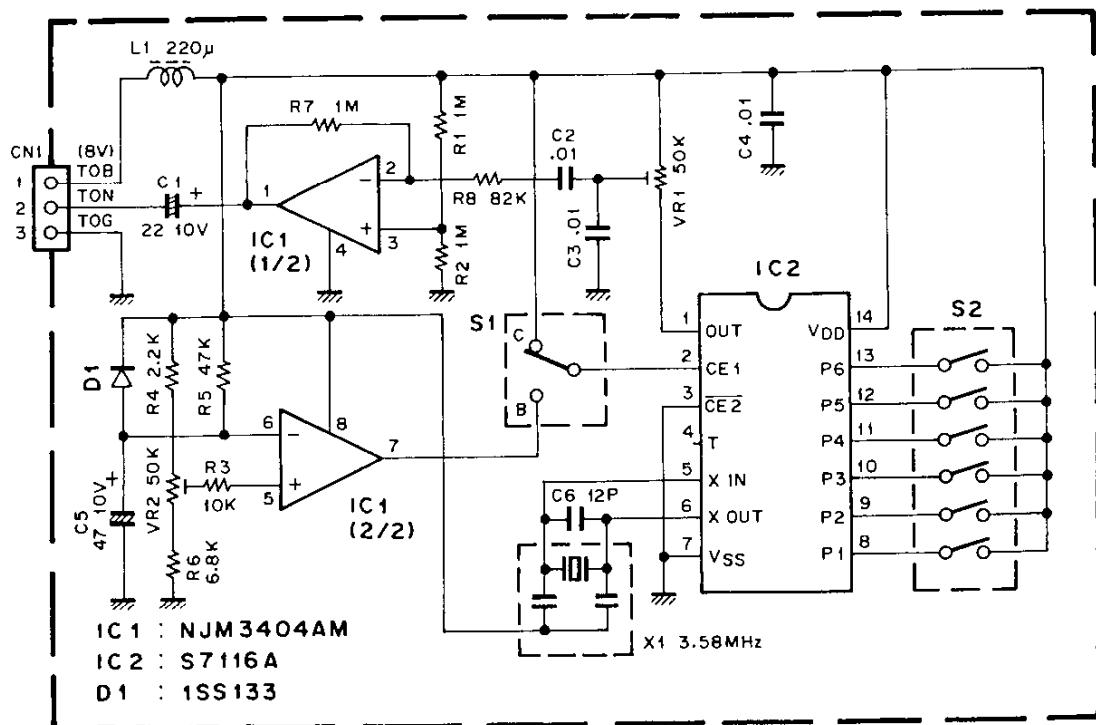

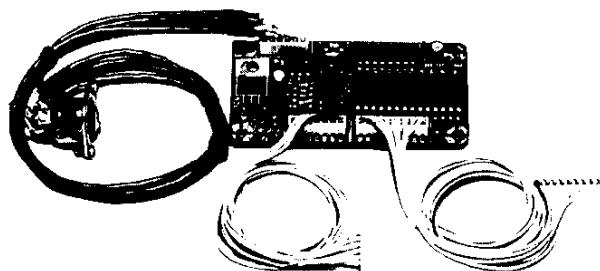TS-140S/680S**IF-10C (INTERFACE KIT)****IF-10C EXTERNAL VIEW****IF-10C SPECIFICATIONS**

Power requirement	DC 5.0V (4.5 ~ 5.5V)
Current drain	100mA
Interface signal level	
Output signal "L" level	0 ~ 0.4V
" " "H" level	2.4 ~ 5V
Input signal "L" level	0 ~ 0.8V
" " "H" level	2 ~ 5V
Operating temperature	-10°C ~ +50°C

IF-10C PARTS LIST

* : New Parts
Parts without Parts No. are not supplied.

Ref. No.	Address	New Parts	Parts No.	Description	Desti-nation	Re-marks
IF-10C						
		*	B42-3317-04 B42-3319-04	Serial plate Plate	K	
		*	CK45F1H103Z	C 0.01μF Z (DIN)		
		*	E06-0655-05	6P DIN Connector		
		*	E31-3331-05	Connector with lead (DIN)		
		*	E31-3333-05	Connector with lead 7P		
		*	E31-3334-05	Connector with lead 9P		
		*	H13-0804-04	Protection plate		
		*	H25-0711-04	Antistatic bag		
		*	H25-0712-04	Antistatic bag (PC board)		
			J61-0307-05	Wire band		
			N30-2605-41 N87-2606-46	Pan head screw M2.6 x 5 (DIN) Brazier head taptite screw φ2.6 x 6		
		*	X57-1160-02	Interface unit		
INTERFACE UNIT (X57-1160-02)						
C3			CE04CW0J470M	Electro 47μF 6.3WV		
C4, 5			C91-0117-05	C 0.01μF		
C6			CE04CW0J470M	Electro 47μF 6.3WV		
C7			C91-0117-05	C 0.01μF		
C8, 9			CK45B1H102K	C 1000pF K		
C10 - 15			C91-0117-05	C 0.01μF		
L1, 2		*	L40-1011-16	Ferri-inductor 100μH		
X1		*	L78-0015-05	Ceramic resonator CSA2.45MG11		
R2			RD14BB2C103J	RD 10K J		
R3, 4			RD14BB2C101J	RD 100 J		
R5			RD14BB2C222J	RD 2.2K J		
R6			RD14BB2C472J	RD 4.7K J		
R7		*	R90-0597-05	Resistor block 1K x 4		
JP1, 3			R92-1061-05	Jumper wire		
IC1		*	μPD8251AFC	IC		
IC2		*	TC4040BP	IC		
IC3		*	HD7404P	IC		

FOR SERVICE MANUALS**CONTACT:****MAURITRON TECHNICAL SERVICES**www.mauritron.co.uk



TEL: 01844 - 351694

FAX: 01844 - 352554

TS-140S/680S

IF-10C (INTERFACE KIT)**IF-10C PC BOARD VIEW**

INTERFACE UNIT (X57-1160-02)

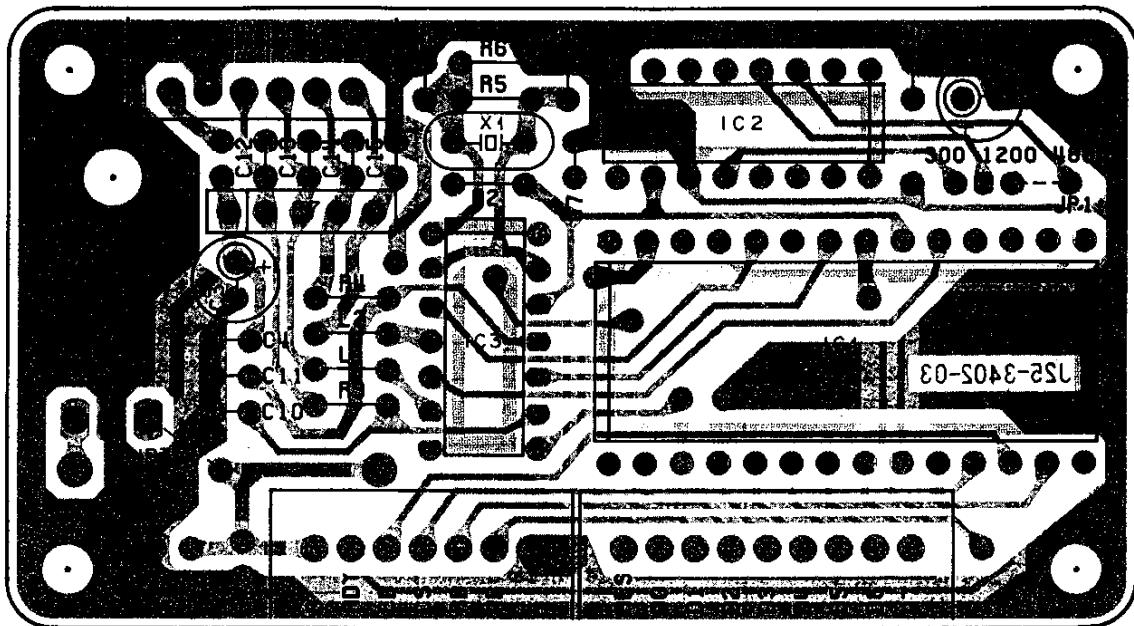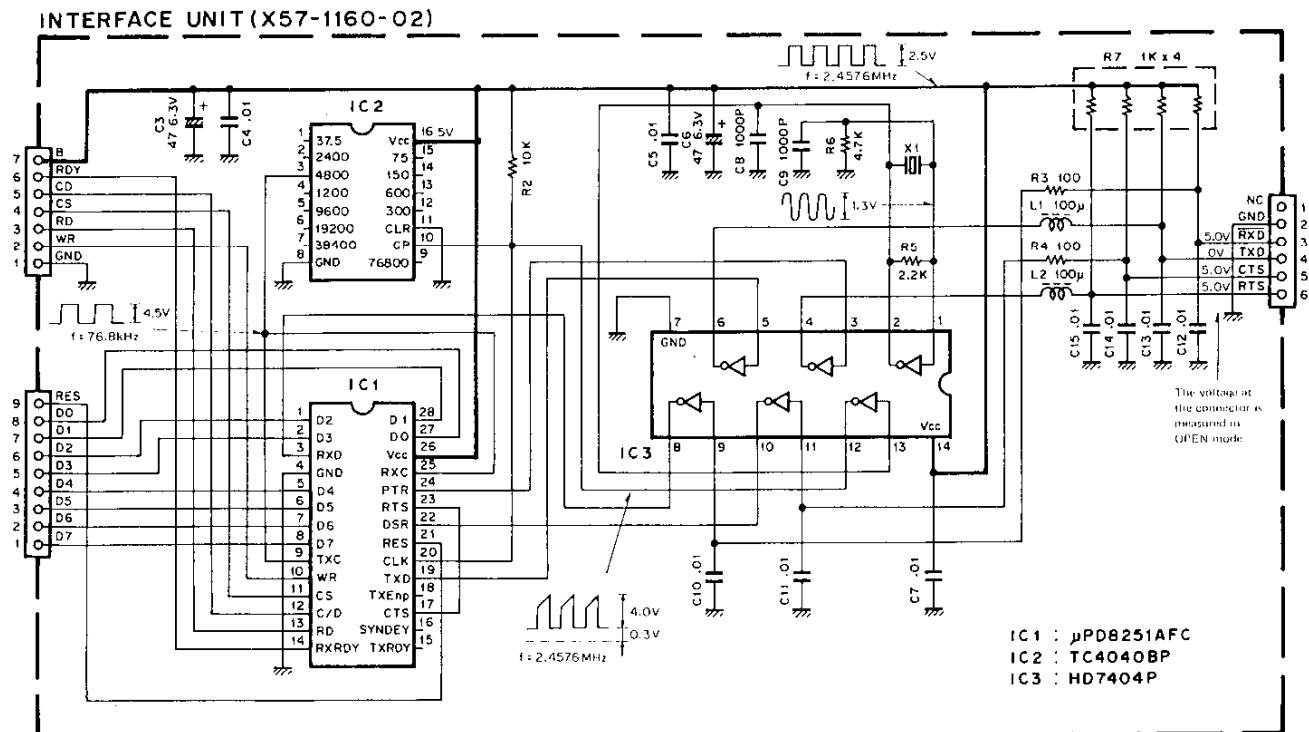**IF-10C SCHEMATIC DIAGRAM**

TS-140S/680S**SPECIFICATIONS**

Specifications	Model	TS-140S	TS-680S
General	Mode	J3E (LSB, USB), A1A (CW), A3E (AM), F3E (FM)	
	Antenna impedance	50 ohms	
	Power requirement	12 to 16 VDC (13.8 VDC reference)	
	Grounding	Negative	
	Current drain	Receive mode with no input signal	1.5 A
		Transmit mode	20 A
	Operating temperature	-10 to +50°C (+14 to +122°F)	
	Frequency stability	Less than ±10 PPM	
	Frequency accuracy	Less than ±10 PPM	
	Dimensions (W×H×D) (Projections included)	281×107×305 mm (11-1/16"×4-7/32"×12")	
	Weight	6.1 kg (13.4 lbs)	
Transmitter	Frequency range FOR SERVICE MANUALS CONTACT: MAURITRON TECHNICAL SERVICES www.mauritron.co.uk TEL: 01844 - 351694 FAX: 01844 - 352554	160 m band	1.8 to 2.0 MHz
		80 m band	3.5 to 4.0 MHz
		40 m band	7.0 to 7.3 MHz
		30 m band	10.1 to 10.15 MHz
		20 m band	14.0 to 14.35 MHz
		17 m band	18.068 to 18.168 MHz
		15 m band	21.0 to 21.45 MHz
		12 m band	24.89 to 24.99 MHz
		10 m band	28.0 to 29.7 MHz
		6 m band	— 50.0 to 54.0 MHz
Output power	160 m band ~ 15 m band	SSB	110 W *1
		CW	100 W *1
		AM	40 W *1
		12 m band	SSB · CW 100 W AM 40 W
	10 m band	SSB	100 W 95 W
		CW	95 W
		FM	50 W
		AM	40 W
	6 m band	SSB · CW · FM	— 10 W
		AM	— 4 W
Modulation	LSB, USB		Balanced modulation
	FM		Reactance modulation
	AM		Low level modulation
Spurious radiation (CW)	1.9 MHz to 29.7 MHz		Less than -40 dB
	50 MHz to 54 MHz		— Less than -60 dB
Carrier suppression		More than 40 dB (with 1.5 kHz reference)	
Unwanted sideband suppression		More than 50 dB (with 1.5 kHz reference)	
Maximum frequency deviation (FM)		± 5 kHz	
Frequency response (-6 dB)		400 to 2600 Hz	
Microphone impedance		500 ohms to 50 kΩ	

TS-140S/680S**SPECIFICATIONS**

Specifications		Model	TS-140S	TS-680S
Receiver		Circuitry		Double conversion superheterodyne
		Frequency range		500 kHz to 30 MHz 50 MHz to 54 MHz
		Intermediate frequency		1st: 40.055 MHz, 2nd: 455 kHz
		LSB, USB, CW (at 10 dB S+N/N)	500 kHz to 1.62 MHz	Less than 3.98 μ V
			1.62 MHz to 21.5 MHz	Less than 0.25 μ V
			21.5 MHz to 30 MHz	Less than 0.25 μ V
			50 MHz to 54 MHz	— Less than 0.16 μ V *2
		AM (at 10 dB S+N/N)	500 kHz to 1.62 MHz	Less than 39.8 μ V
			1.62 MHz to 21.5 MHz	Less than 2.5 μ V
			21.5 MHz to 30 MHz	Less than 2.5 μ V
			50 MHz to 54 MHz	— Less than 1.58 μ V *2
		FM (at 12 dB SINAD)	21.5 MHz to 30 MHz	Less than 0.35 μ V
			50 MHz to 54 MHz	— Less than 0.18 μ V *2
		Selectivity		—6 dB: 2.2 kHz, -60 dB: 4.4 kHz
		AM	-6 dB: 6 kHz, -50 dB: 18 kHz	
		FM	-6 dB: 12 kHz, -50 dB: 25 kHz	
Image ratio		More than 50 dB		
1st IF rejection		More than 50 dB		
IF SHIFT variable range		More than \pm 1.2 kHz		
RIT variable range	10 Hz STEP	More than \pm 1.2 kHz		
	20 Hz STEP	More than \pm 2.5 kHz		
Squelch sensitivity (FM)		Less than 0.32 μ V		
Output		1.5 W across 8 ohms load (10% distortion)		
Output load impedance		8 ~ 16 ohms		

Notes:

- *1: The output power on the 160 m band is limited to 10 W depending on local regulations.
- *2: This is valuable when the RF AMP switch is turned ON.
- Circuit and ratings are subject to change without notice due to advancements in technology.

FOR SERVICE MANUALS**CONTACT:****MAURITRON TECHNICAL SERVICES****ACCESSORIES**www.mauritron.co.ukUnpack your TS-140S/680S carefully ~~TEL: 01844 4351694~~ supplied with the following accessories.

Dynamic microphone (Except European)	TEL: 01844 4351694	T91-0352-05	1 ea.
DIN plug (7-pin).....	TEL: 01844 4351694	E07-0751-05	1 ea.
DIN plug (13-pin).....	TEL: 01844 4351694	E07-1351-05	1 ea.
DC power cable assembly	TEL: 01844 4351694	E30-2065-05	1 ea.
Calibration cable.....	TEL: 01844 4351694	E31-2154-05	1 ea.
Fuse (20A).....	TEL: 01844 4351694	F05-2036-05	1 ea.
Instruction manual.....	TEL: 01844 4351694	B50-8199-XX	1 copy
Warranty card (U.S.A. only).....	TEL: 01844 4351694		1 ea.

After unpacking**Shipping container:**

Save the boxes and packing in the event your unit needs to be transported for remote operation, maintenance, or service.